
SHUTTLE VALVE


(Single Ball Shuttle Valve with Signal at External Port)

Ordering Code:	**LS-13A-X-Y-Z**	

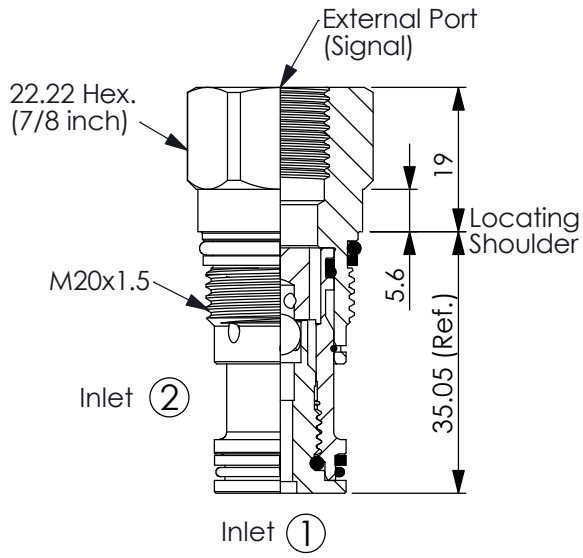


UNIT:mm

Illustrations / detail are for reference only. Data subject to change.

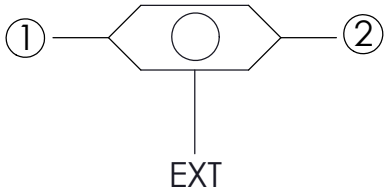

TECHNICAL DATA

Max. pressure:	350	bar
Rated flow:	10	l/min
Cavity-Tooling:	13A-2	
Installation torque:	40 - 50	Nm
Weight:	0.10	kg

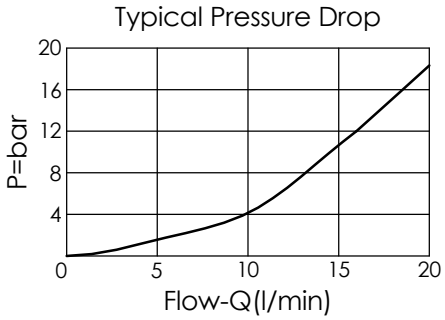

X	OPERATION	
20	Signal at External Port	

· Maximum Leakage Approximately (0.3 cc/min./70 bar)

Y	SPRING	
N	Non-Spring	

Z	OPTION	
G02	External G1/4" Port	
S04	External SAE-4 Port (7/16"-20UNF-2B)	