
CCB Type Large Volume Distributor

CHEN YING




CCB-1-A-6

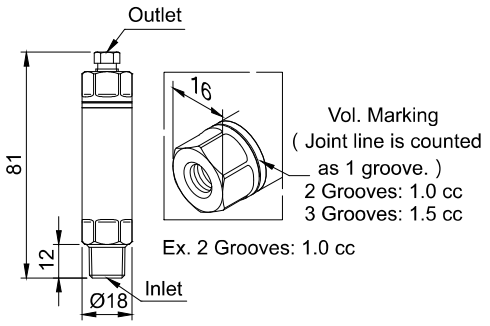

Dimensional Drawing of CCB-1-A-6



CCB-4-A-6666-AG

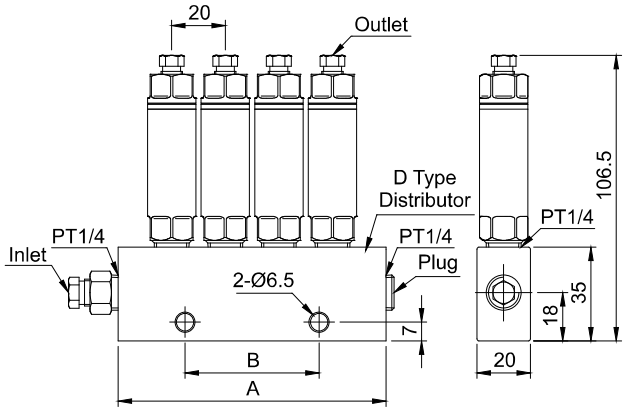

Dimensional Drawing of CCB-4-6666-AG

◆Features

1. CCB type large volume distributor can deliver a precisely metered quantity of oil to each lubrication point.
2. CCB needs to work with a pressure-relief type oil lubricator and discharges oil during the operation time of the lubricator. The minimum interval time setting is 5 minutes.
3. There are two options for the discharge volume of CCB: two grooves stand for 1.0cc, and three grooves stand for 1.5cc.
4. CCB is designed as a singular outlet unit, which can be assembled with a D type distributor to increase the outlet number from one to eight outlets.

◆Dimensional Data & Technical Data

Model	Outlet Num.	Inlet Bore	Outlet Bore	A (mm)	B (mm)	Discharge Volume/ Stroke (Volume Marking)	Operating Pressure Range	Suitable Viscosity	N.W. (g)
CCB-1	1	Outer Thread PT1/4	Ø4 (M8xP1.0)	-	-	1.0cc (2 Grooves) 1.5cc (3 Grooves)	8-30 kgf/cm²	Oil 32-90 cSt@40°C	113
CCB-2	2	Inner Thread PT1/4 or Ø6 (M10xP1.0) or Ø8 (M14xP1.5)		60	30				341
CCB-3	3			80	30				486
CCB-4	4			100	50				632
CCB-5	5			120	70				772
CCB-6	6			140	90				917
CCB-7	7			160	110				1059
CCB-8	8			180	130				1203

◆Dimensional Data of D Type Distributor

Model	Outlet Num.	A (mm)	B (mm)	N.W. (g)
D-2	2	60	30	90
D-3	3	80	30	122
D-4	4	100	50	151
D-5	5	120	70	182
D-6	6	140	90	213
D-7	7	160	110	243
D-8	8	180	130	274

◆Order Code

CCB — 4 — A — 6 — 6 — 6 — 6 — A — G (Left Side / Right Side)

Code	Outlet Number
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8

Code	Outlet Adapter Type
A	Compression Bushing & Sleeve

Code	Discharge Volume
6	1.0cc
7	1.5cc

Code	Inlet Fittings
A	Ø6 Straight Adapter with Compression Bushing and Sleeve
B	Ø8 Straight Adapter with Compression Bushing and Sleeve
G	Closure Plug
X	Without Fittings
S	Special Request

※ Except for CCB-1, others all need to provide the order code for inlet fittings.