



FCS SERİSİ HİDROLİK HASSAS HIZ AYAR VALFLERİ

FCS Serisi Hassas Hız Ayar Valfleri, akışkan hızının her iki yönde ayarlanmasını sağlayan valf türüdür. Hız Ayar Valfleri, ayar yapmaya yarayan kontrol kapağı yardımıyla akışkanın güvenli ve hızlı kontrolünü sağlar.
Ayar kapağında, kapağı kilitleyerek vibrasyondan kaynaklanan oynamaları ve değişiklikleri engelleyen bir ayar vidası bulunmaktadır. Akışkanın gücünü hassas şekilde koruyup kontrol eden ve kusursuz hız ayarını sağlayan FCS Serisi Hassas Hız Ayar Valfleri, özellikle şerit testere ve benzeri hassas uygulamalarda yaygın şekilde kullanılmaktadır.

Malzeme	Otomat Çeliği
Vida Ölçüsü	BSP (İsteğe Bağlı: NPT, Metrik)
Sızdırmazlık	Nitril O-ring (NBR)
Çalışma Sıcaklığı	-30 °C ile +110 °C
Kaplama	Galvaniz (Chrome III Pasivasyon)
Kullanım Alanı	Kazı makineleri, vinçler ve araç üstü hidrolik uygulamalar.




FCS SERIES HYDRAULIC PRECISION FLOW CONTROL VALVES

FCS Series Hydraulic Precision Flow Control Valves allow shut-off and the adjustment of the flow in both directions. They provide reliable and easy control of fluid by means of the control knob allows adjustment.
The setscrew on the control knob allows the knob to be locked, preventing movements and changes due to vibration.
FCS Series Hydraulic Precision Flow Control Valves are widely used in many fields especially in ribbon saw and similar sensitive applications by controlling and protecting of fluid power precisely, and providing accurate settings for fluid speed.

Material	Carbon Steel
Thread Size	BSP (Upon Request: NPT, Metric)
Sealing	Nitrile O-ring (NBR)
Working Temperature	-30 °C and +110 °C
Plating	Zinc Plating (Cr III Passivation)
Applications	General hydraulic applications






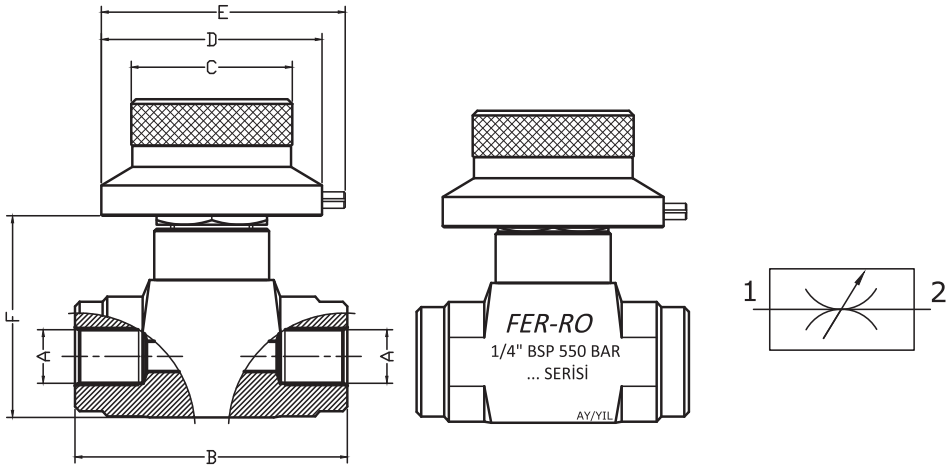

YANDAN GİRİŞ / INLINE CONNECTION

Teknik Özellikler
Technical Specifications

Kod (Code)	Vida Ölçüsü (Thread Size) A	Çalışma Basıncı (Working Pressure) Bar	Ölçüler - mm (Dimensions) - mm				
			B	C	D	E	F
FCSRKNG14N-280	1/4" BSP	550	59.30	35	48	53	40.50
FCSRKNG14N-350	1/4" BSP	550	59.30	35	48	53	40.50
FCSBKNG14N-280	1/4" BSP	550	59.30	35	48	53	40.50
FCSBKNG14N-350	1/4" BSP	550	59.30	35	48	53	40.50

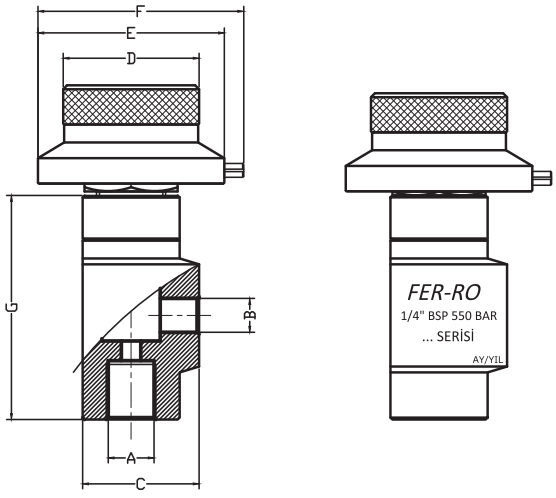

ALTTAN GİRİŞ / REAR CONNECTION

Teknik Özellikler
Technical Specifications

Kod (Code)	Vida Ölçüsü (Thread Size) A	Vida Ölçüsü (Thread Size) B	Çalışma Basıncı (Working Pressure) Bar	Ölçüler - mm (Dimensions) - mm				
				C	D	E	F	G
FCSRKNG14N-RC-280	1/4" BSP	1/8" BSP	550	30	35	48	53	57
FCSRKNG14N-RC-350	1/4" BSP	1/8" BSP	550	30	35	48	53	57
FCSBKNG14N-RC-280	1/4" BSP	1/8" BSP	550	30	35	48	53	57
FCSBKNG14N-RC-350	1/4" BSP	1/8" BSP	550	30	35	48	53	57