

RELIEF VALVE
(Ventable)

Ordering Code:	**RV-11A-X-Y-Z**

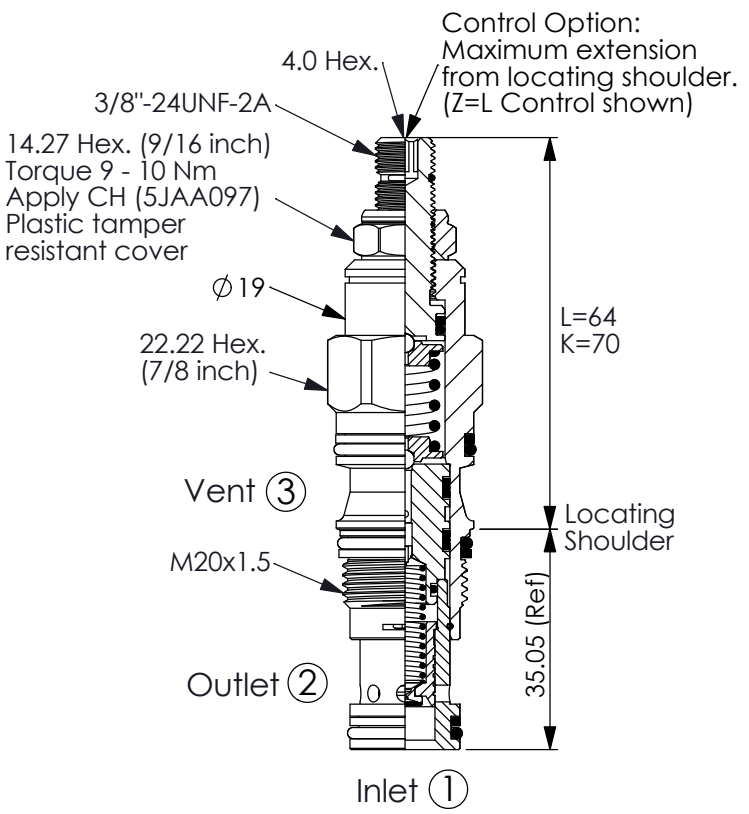

UNIT:mm


Illustrations / detail are for reference only. Data subject to change.



TECHNICAL DATA

Max. Operating pressure: 350 bar		
Rated flow:	60	l/min
Cavity-Tooling:	11A-3	
Installation torque:	40 - 50	Nm
Weight:	0.15 (**Z**=L)	kg

Will accept maximum pressure at port ② but it is necessary to install double back-up rings to valve for cross port relief circuit application. Leakage of spool should be concerned. If you have any questions, please contact Winner's sales department.

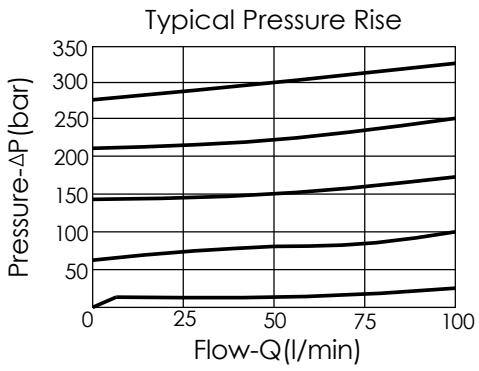

Y	**SPRINGS**	
	ADJUSTMENT RANGES	
A	7 - 210 bar (70 bar Standard Setting)	
B	3.5 - 105 bar (70 bar Standard Setting)	
C	10.5 - 420 bar (70 bar Standard Setting)	
D	1.7 - 55 bar (28 bar Standard Setting)	
E	1.7 - 28 bar (14 bar Standard Setting)	
H	2 - 210 bar (70 bar Standard Setting)	
W	10.5 - 315 bar (70 bar Standard Setting)	

X	**OPERATION**	
30	Standard Type	

- Response Time-Typical (10 ms)
- Maximum Leakage Approximately (33 cc/min./70 bar)

Z	**OPTIONS**	
L	Leakproof hex. socket screw.	
K	Handknob with Lock Knob. (Order Code: 6ZAK001)	
KF	Handknob with Panel Mount.	
C	Stainless Steel Tamper Resistant Cover.	