

CHECK VALVE

Ordering Code:	**CV-18A-X-Y-Z**	

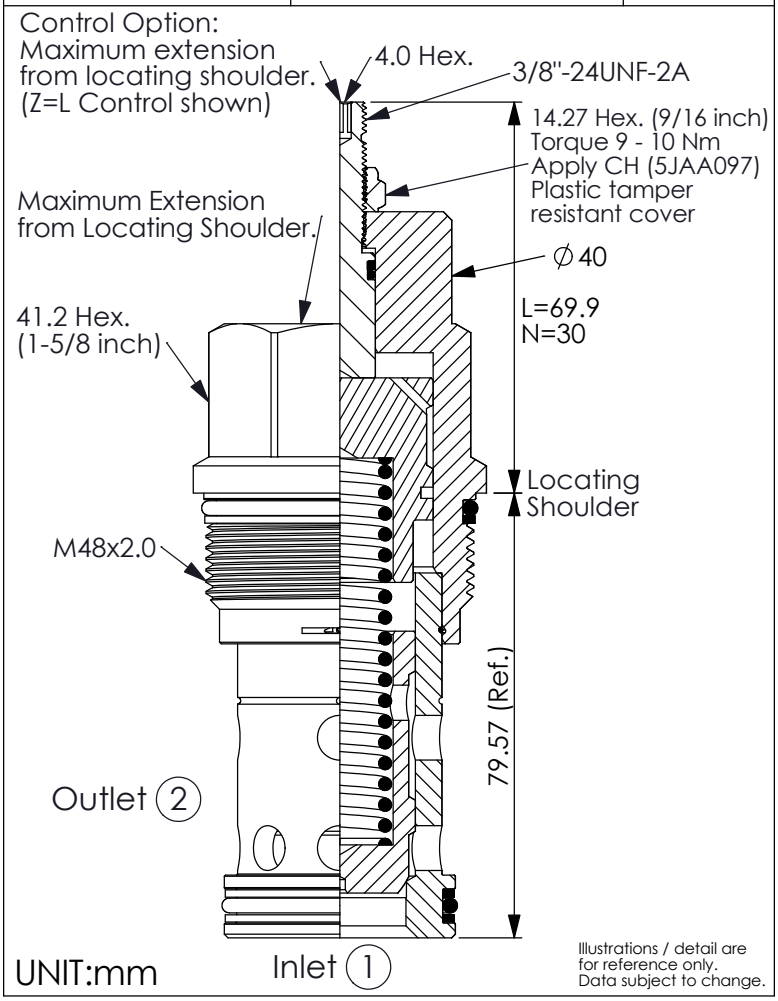




TECHNICAL DATA

Max. Operating pressure:	350	bar
Rated flow:	640	l/min
Cavity-Tooling:	18A-2 (18AB-2)	



(For high flow or low pressure drop applications, it is recommended to use the 18AB-2 cavity.)

Installation torque:	465 - 500	Nm
Weight:	0.95 (**Z**=N) 1.074 (**Z**=L)	kg

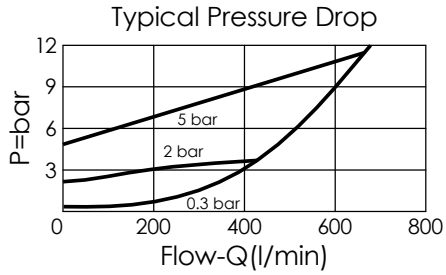

Y	**SPRINGS**
	Cracking pressure
007	0.07 bar
01	0.1 bar
015	0.15 bar
03	0.3 bar
10	1.0 bar
20	2.0 bar
35	3.5 bar
50	5.0 bar
70	7.0 bar
105	10.5 bar

X	**OPERATION**
20	① to ② (Free Flow)

Z	**OPTION**
N	Non-adjustable 
NP	Non-adjustable With stainless steel external metal components (Buna-N Seal) 
L	Leakproof hex. socket screw. 