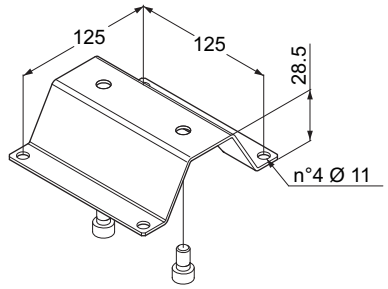
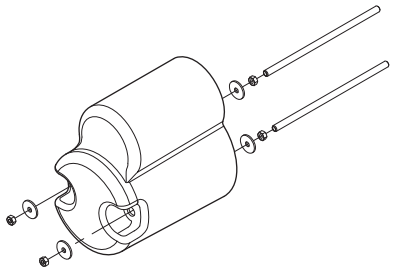
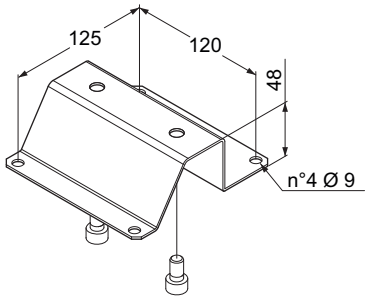
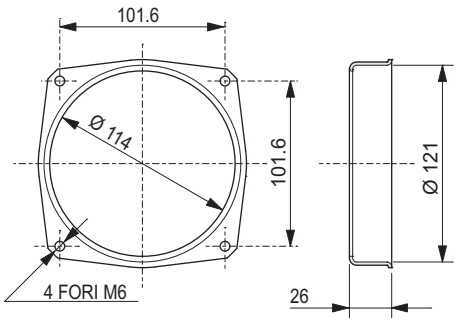



*	Description	Drawing	Code	Note
G	Standard foot, (galvanized sheet steel) thickness 2.5 mm (unassembled)		Kit (foot and screws): 17010021	All motors are compatible except orientation / 3 Tanks compatible (except for orientation / 3) S**A S**B S**C S**G S**L
B	Non-removable red plastic plug for pressure relief valve (unassembled)		Plug: 60309200	
C	Protection device for DC motors (supplied assembled)		Kit (protectin, nut, tierods, washers): 17010048	For motors: M2EN M4ES With blocks, please add the block code 91006000.000
D	High foot, (galvanized sheet steel) thickness 2 mm (unassembled)		Kit (foot and screws): 17010053	All motors are compatible except orientation / 3 Tanks compatible (except for orientation / 3) S**A S**B S**C S**D S**F S**G S**L
E	Collar in welded sheet steel, thickness 2 mm (unassembled)		Collar: 25000300 Tank fixing kit (screws and O-Ring): 17010086	
F	Without valves connectors			

IX