
NG3 MICRO MODULAR MANIFOLDS, LATERAL PORTS





Dimensions in mm (inches)

Main features

Max pressure	350 bar
Weight	0,21 Kg (0,46lb)
Fixing bolts	2 M8 tie - rods steel class 8.8 or above

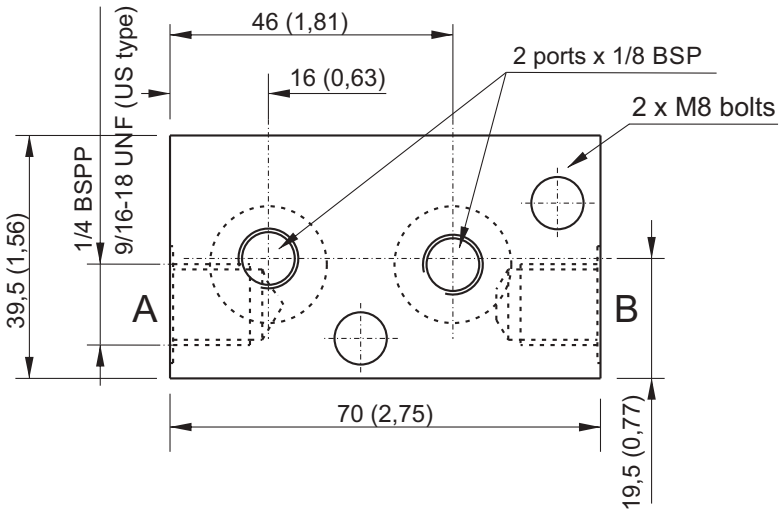

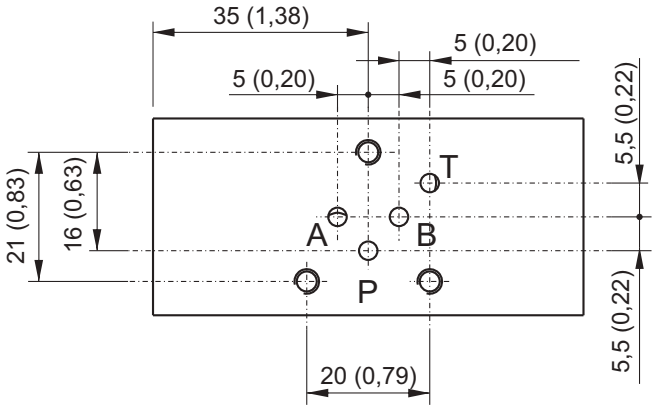



Parallel connection	Spare part code
Lateral ports	**M60403010**
Lateral ports US execution	**M60403010US**

Note: Recommended tightening torque for M8 bolts: 16 Nm. Attention! Do not use tie-rods less than 8.8.
To add NG3 MICRO external manifolds to a PPC assembly code, just add the converter PPC to PPM first, then the additional manifolds spare part codes at the end of the PPC code. eg: PPC-0,8 12DC-MB-J-K0,6-V200-G-RETURN KIT-1,5L+**EMASH00001+M60403004+M60403010.**
The NG3 micro valve attachment is on motor side.