
MODULAR MANIFOLDS NG6 (CETOP 3) WITH INTEGRAL PILOT OPERATED CHECK VALVES




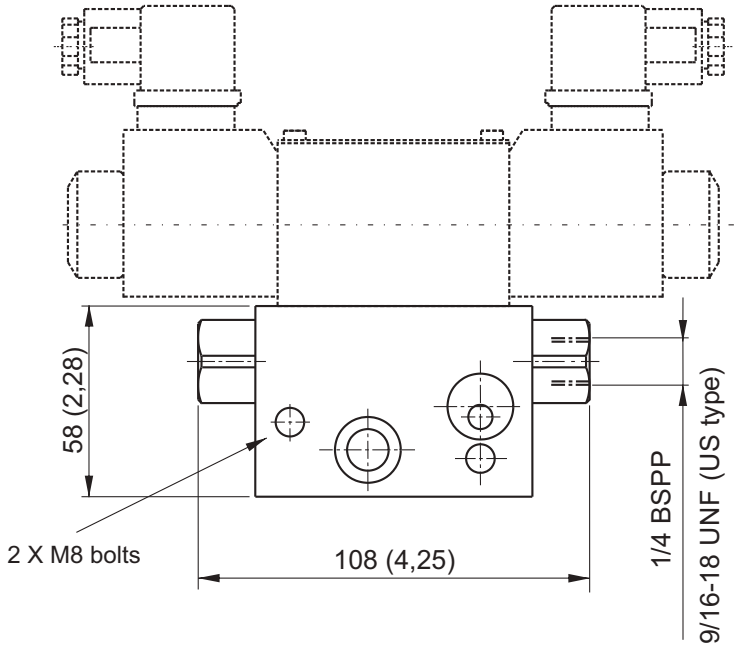



Dimensions in mm (inches)

Main features


Max pressure	350 bar
Pilot ratio	1:5,6
Weight	0,71 Kg (1,56lb)
Fixing bolts	2 M8 tie - rods steel class 8.8 or above

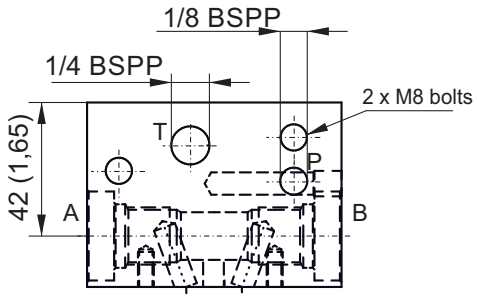

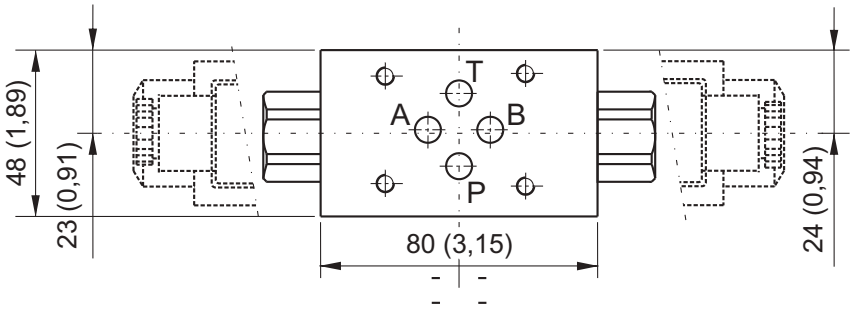




Spare part code
E60413002
E60413002US*




Spare part code
E60413001
E60413001US*



Spare part code
E60413003
E60413003US*

Option 1/4"BSP P port:



Spare part code
PORTMF0001

Note: Recommended tightening torque for M8 bolts: 16 Nm. Attention! Do not use tie-rods less than 8.8.
*: US execution with 9/16-18UNF SAE06 exit ports
To add external manifolds to a PPC assembly code, just add their spare part codes at the end of the PPC code. eg: PPC-0,8 12DC-MB-J-K0,6-V200-G-RETURN KIT-1,5L+**E60403004**+**E60413001.**
Code does not include the Cetop solenoid valve. See NG6 (Cetop 3) valves table in section G.