
4 HOLES K KEYED WITH FLANGED PORT UNIDIRECTIONAL GEAR PUMP

4 DELİKLİ K KAMALI ADAPTÖRLÜ TEK YÖNLÜ DİŞLİ POMPA



HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10÷10	10÷35	> 35
	VG (cSt = mm2/s)	22	32	46	68
Optimal kinematic viscosity			VG= 10 cSt ÷ 100 cSt		
Max kinematic viscosity suggested at the start-up			VG= 750 cSt		
Viscosity index suggested VI > 100			Working temperature -15°C +100°C		
Oil filtering			> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure			-0,3 ÷ 2 bar		

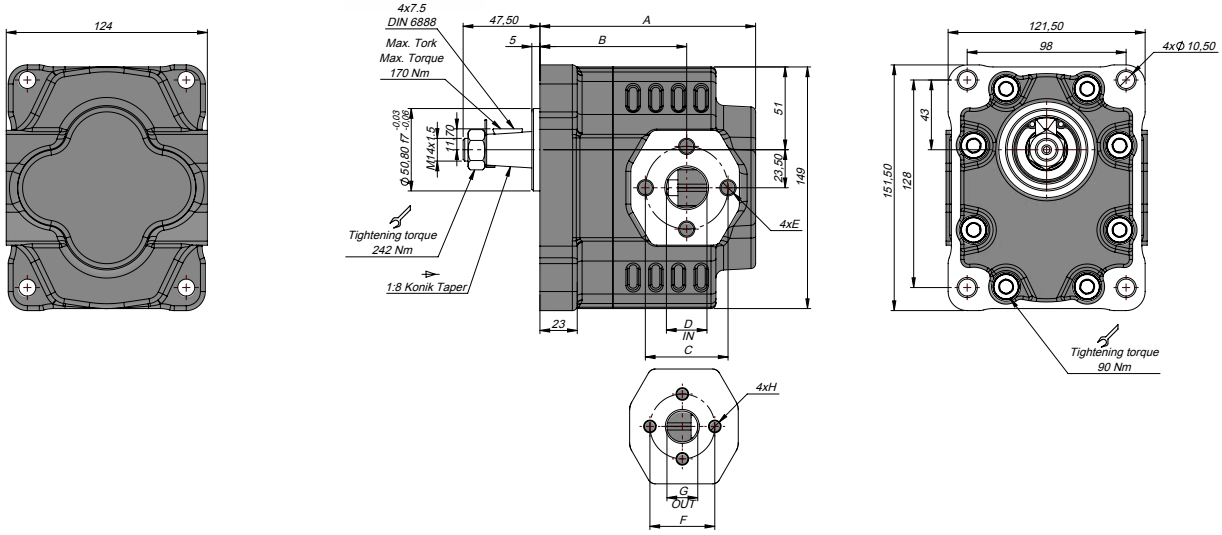

Kod Code			İletim hacmi Displacement	Maks. Aralıklı Basınç Max. Intermittent Pressure	Hız Aralığı Speed Range		A	B	Sol/Left - Sağ/Right						BD					
					(Dev/Dak) (Rev / Min)				GİRİŞ Inlet			ÇIKIŞ Outlet			GİRİŞ Inlet			ÇIKIŞ Outlet		
Sol/Left	Sağ/Right	BD	(cm³/rev)	(BAR)	Min.	Max. Continuous	(mm)	(mm)	C	D	E	F	G	H	C	D	E	F	G	H
G30022KK612	G30022KK622	G30022KK632	22	300	300	2500	154	118,50	51	25	M10	40	19	M8	51	25	M10	51	25	M10
G30027KK612	G30027KK622	G30027KK632	27	290			160	118,50												
G30034KK612	G30034KK622	G30034KK632	34	285		2200	165	122,50												
G30043KK612	G30043KK622	G30043KK632	43	280		2000	171	128,50												
G30051KK612	G30051KK622	G30051KK632	51	230			176	125,50												
G30061KK612	G30061KK622	G30061KK632	61	225		1800	184	132,50												
G30082KK612	G30082KK622	G30082KK632	82	200		1500	195	140,50	62	33	M12	51	27	M10	62	33	M12	62	33	M12