

SCHEDA - *CARD*	PRODOTTO - *PRODUCT*	SCHEMA - *SCHEMA*	VUR
G10/C			**VALVOLA DI RITEGNO IN LINEA CON OTTURATORE** *CHECK VALVE - POPPET SERIES*

APPLICAZIONE
Sono utilizzate per consentire il passaggio del flusso in un senso ed impedirlo nella direzione opposta.
MONTAGGIO
Collegare la bocca B all'alimentazione e la bocca A all'attuatore.
FUNZIONAMENTO
Il fluido passa libero da B verso A ed è completamente bloccato da A verso B. Possono essere utilizzati come regolatori di flusso unidirezionali a taratura fissa richiedendo foro calibrato.
A RICHIESTA
Zincatura nera - Molle speciali - Foro calibrato - Marcatura personalizzabile.
NOTE COSTRUTTIVE
Corpo in acciaio zincato - Componenti in acciaio trattati termicamente - Non ammette trafilamenti.


APPLICATION
Flow is free in one direction and is blocked in the opposite direction.
INSTALLATION
Connect actuator to port A and pressure flow to port B.
OPERATION
These valves allow flow from port B to port A and block the flow in the opposite direction. They may as well be used as unidirectional flow regulators with fixed setting, by requesting a calibrated hole.
OPTIONAL
Black zinc plated - Special springs - Calibrated hole - Custom marking.
FEATURES
Zinc plated steel body - Hardened internal components made of steel - No leakage

CARATTERISTICHE - *HYDRAULIC FEATURES*

Dimensione *Dimension*	005	01	015	02	03	04	05	06	07
Portata max cono *Max Flow Poppet (l/min)*	15	30	30	50	90	130	180	250	380
Pressione max *Max pressure (bar)*	400	400	400	400	350	300	270	250	200

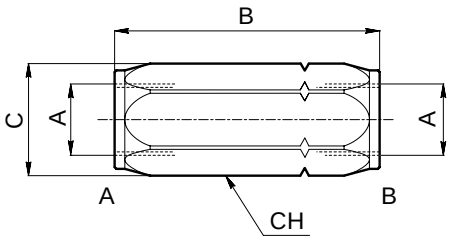

OPZIONALE - *OPTIONAL*

Descrizione *Description*	Foro calibrato *Calibrated hole*
Schema *Schema*	

DIMENSIONI E PESI - *EXTERNAL DIMENSIONS AND WEIGHTS*

Dimensione - *Dimension*	A gas	A npt	A sae	B gas	B npt	B sae	C	Ch	Peso - *Weight (kg)*
005	-	-	7/16-20	-	-	60	21	19	-
01	1/4	1/4	-	58	60	-	21	19	0.10
015	-	-	9/16-18	-	-	60	21	19	0.10
02	3/8	3/8	3/4-16	62	69	69	27	24	0.18
03	1/2	1/2	7/8-14	71	79	79	33	30	0.31
04	3/4	3/4	1 1/16-12	83	94	94	40	36	0.56
05	1	1	1 5/16-12	106	106	106	59	45	0.91
06	1 1/4	1 1/4	1 5/8-12	127	127	127	63	55	1.48
07	1 1/2	1 1/2	1 7/8-12	138	138	138	74	65	2.37

CODICE ORDINAZIONE - *ORDERING CODE*

VUR | | | | | | |

Dimensione - *Dimension*			
Tipo-*Type*	GAS	NPT	SAE
005	-	-	7/16-20
01	1/4	1/4	-
015	-	-	9/16-18
02	3/8	3/8	3/4-16
03	1/2	1/2	7/8-14
04	3/4	3/4	1 1/16-12
05	1	1	1 5/16-12
06	1 1/4	1 1/4	1 5/8-12
07	1 1/2	1 1/2	1 7/8-12

Tenuta *Type*	
C	Cono *Poppet type*

Tipo Filetto *Port type*	
	GAS
N	NPT
S	SAE

Molla (bar) *Spring (bar)*	
	0.5
4	4
8	8

Foro calibrato *Calibrated hole*	
	senza foro *without hole*
FO	con foro (*) *with hole (*)*

(*) = indicare diametro foro
(*) = specify hole diameter

ESEMPIO ORDINAZIONE - *ORDERING CODE EXAMPLE*

VUR 02 C N	VUR - Dimensione 02 - Filetto 3/8 NPT - Tenuta con otturatore - Molla 0,5 bar / *VUR - 02 Dimension - 3/8 NPT Port thread - Poppet type - 0,5 bar spring set*