
CALZA/N/NYLON



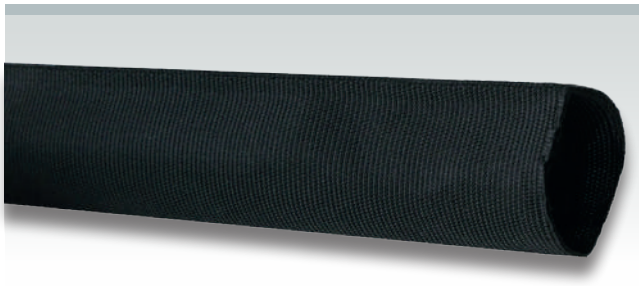

Haken verfügbar zur Befestigung den Hüllen
Hooks available for sleeves fastening

DE VERWENDUNG

Hülle aus polyamid (nylon), geeignet zum Schutz von mehreren Rohren im Hydraulikbereich.

Norm: **EN ISO 3457 - EN 4413.**

• **TEMPERATURBEREICH:** -40°C +120°C

STRUKTUR

Röhrenförmig: 100% polyamid (nylon)

• **Dicke**: 1,60 mm (±1%)

• **Abriebfestigkeit**: ISO 6945

• **Zugfestigkeit**: von 33 bis 43%

• **UV-beständig**: EN 14471

• **Ozonbeständig**: ISO 1431-1

Auf Anfrage erhältlich: andere Farben und Personalisierungen mit Kundenlogo.

EN APPLICATION

Polyamide (nylon) sleeve covering hose suitable for multiple hydraulic hoses protection.

Standards **EN ISO 3457 - EN 4413.**

• **TEMPERATURE RANGE:** -40°C +120°C

CONSTRUCTION

Hose: 100% polyamide (nylon)

• **Thickness:** 1.60 mm (±1%)

• **Abrasion resistance:** ISO 6945

• **Tensile strenght:** up 33 to 43%

• **UV Resistant:** EN 14471

• **Ozonbeständig:** ISO 1431-1

Available on request: other colors and customizations with customer's logo.

FLACHE BREITE FLAT HEIGHT		INNEN DRM INSIDE DIAMETER		THEORETISCHES GEWICHT WEIGHT		LÄNGE LENGTH	
mm	inch	mm	inch	kg/mt	lbs/ft	mt	ft
30	1.3/16"	17	21/32"	0.031	0.021	100	328
34	1.3/8"	20	3/4"	0.037	0.025	100	328
39	1.17/32"	23	29/32"	0.042	0.028	100	328
42	1.21/32"	25	1"	0.046	0.031	100	328
45	1.3/4"	27	1.1/16"	0.049	0.033	100	328
52	2.1/16"	31	1.1/4"	0.054	0.036	100	328
55	2.5/32"	33	1.13/32"	0.060	0.040	100	328
60	2.3/8"	36	1.3/8"	0.062	0.042	100	328
66	2.9/16"	40	1.9/16"	0.072	0.048	100	328
77	3.1/32"	47	1.27/32"	0.084	0.056	100	328
80	3.5/32"	50	1.7/8"	0.087	0.058	100	328
89	3.17/32"	56	2.1/4"	0.093	0.062	100	328
97	3.5/32"	60	2.3/8"	0.105	0.070	50	164
107	4.7/32"	66	2.19/32"	0.116	0.077	50	164
120	4.3/4"	74	3"	0.130	0.086	50	164
136	4.5/8"	85	3.11/32"	0.148	0.098	50	164
149	6"	93	3.21/32"	0.162	0.108	50	164
179	7.1/32"	112	4.3/8"	0.195	0.130	50	164

Alle technischen Daten beziehen sich auf eine Temperatur von 23°C +/- 2° C (ISO 291) - Toleranzen bei allen angegebenen Durchmessern +/-5%.

All technical specifications apply to a temperature of 23° C ±2° C (ISO 291) – tolerance on all specifications ±5%.