

RELIEF VALVE
(Ventable)

Ordering Code:	**RV-19A-X-Y-Z**

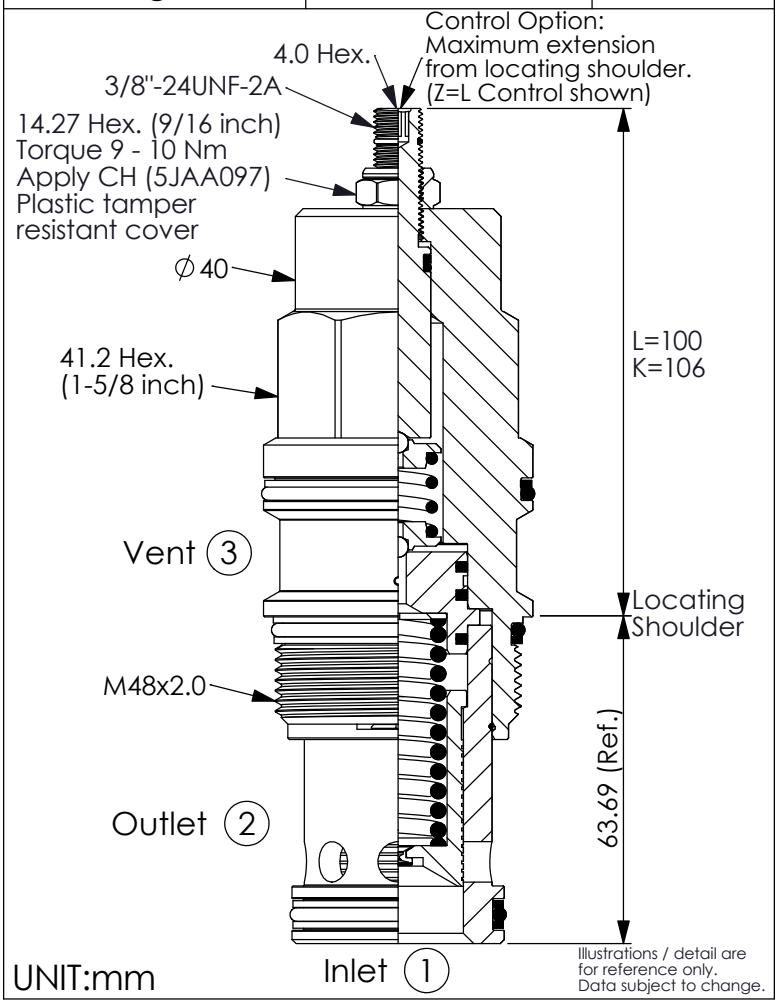





TECHNICAL DATA

Max. Operating pressure:	350	bar
Rated flow:	480	l/min
Cavity-Tooling:	19A-3 (19AB-3)	
Installation torque:	465 - 500	Nm
Weight:	1.43 (**Z**=L)	kg

Will accept maximum pressure at port ② ; suitable for use in cross port relief circuits. If used in cross port relief circuits, consider spool leakage.


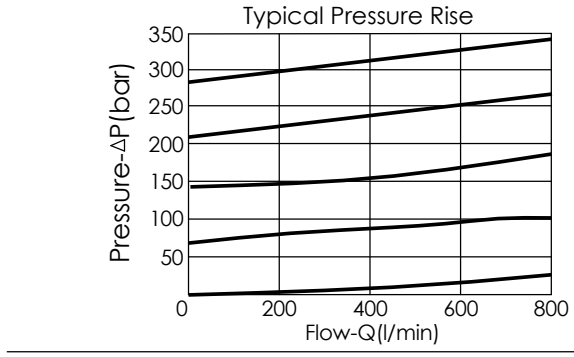


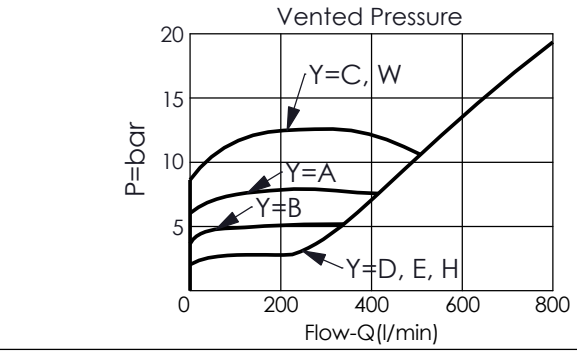

Y	**SPRINGS** ADJUSTMENT RANGES	
A	7 - 210 bar (70 bar Standard Setting)	
B	3.5 - 105 bar (70 bar Standard Setting)	
C	10.5 - 420 bar (70 bar Standard Setting)	
D	1.7 - 55 bar (28 bar Standard Setting)	
E	1.7 - 28 bar (14 bar Standard Setting)	
H	2 - 210 bar (70 bar Standard Setting)	
W	10.5 - 315 bar (70 bar Standard Setting)	

X	**OPERATION**	
30	Standard Type	

- Response Time-Typical (10 ms)
- Maximum Leakage Approximately (80 cc/min./70 bar)

Z	**OPTIONS**	
L	Leakproof hex. socket screw. 	
K	Handknob with Lock Knob. (Order Code: 6ZAK001) 	
C	Stainless Steel Tamper Resistant Cover. 