

BV2AWCFB SERİSİ 2 YOLLU TAM GEÇİŞLİ KÜRESEL VANALAR (SU & HAVA VE BAZI ÖZEL KİMYASALLAR İÇİN)

BV2AWCFB Serisi 2 yollu tam geçişli küresel vanalar (su & hava ve bazı özel kimyasallar için)akışkanın açma ve kısılmasında kullanılırlar. Kolayca açılıp kapanabilmeleri akışkan geçişinin rahat olmasını sağlar. Volumetrik yapılarından dolayı hızlı ve verimli çalışırlar ve akışkanda oluşabilecek kavitasyonları engellerler. İstenildiğinde kare pim üzerindeki kilitleme pulu yardımıyla açık veya kapalı olarak kilitlenebilirler. BV2AWCFB Serisi 2 yollu tam geçişli küresel vanalarda (su & hava ve bazı özel kimyasallar) içteki küre malzemesi pirinçten olup, sert krom ile kaplanmıştır. BV2AWCFB Serisi 2 yollu tam geçişli küresel vanalarda (su & hava ve bazı özel kimyasallar)su ve hava hatlarında, bazı özel kimyasal akışkanların geçişinde kullanılırlar.


Gövde Malzemesi	Yüksek Nitelikli Dövme Çelik
Küre Malzemesi	Sert Krom Kaplı – Pirinç
Vida Ölçüsü	BSP, NPT
Küre Yataklaması	Özel sızdırmazlık elemanı
Sızdırmazlık	Nitril O-ring (NBR)
Çalışma Sıcaklığı	-30 °C ile +110 °C
Kaplama	Galvaniz (Chrome III pasivasyon)
Özel Hallerde	VİTON (-30 °C - +225 °C)
Kullanım Alanı	Su ve Hava hatlarının bulunduğu uygulamalarda ve bazı kimyasal akışkanların geçişinde kullanılırlar.




BV2AWCFB SERIES 2 WAY FULL BORE BALL VALVES (WATER & AIR & SOME SPECIAL CHEMICAL FLUIDS)


BVAWCFB Series 2 Way Full Bore Ball Valves (Water & Air & Some Special Chemical applications) are used to either shut-off or open of flow passage and their easy operation provides unrestricted flow. Due to their volumetric structure they work rapidly and efficiently, and prevent cavitation.
BVAWCFB Series 2 Way Full Bore Ball Valves (Water & Air & Some Special Chemical applications) can be locked in the open or closed position through locking washer on the circle pin. Internal ball is hard chrome coated brass. These ball valves are suitable for air and water lines and some special chemical fluid pass applications,

Body Material	High Grade Forged Steel
Ball Material	Hard chrome coated brass.
Thread Size	BSP, NPT
Ball Seats	Special sealing equipments
Sealing	Nitrile O-ring (NBR)
Working Temperature	-30 °C and +110 °C
Plating	Zinc Plating (Cr III Passivation)
Upon Request	VITON (-30 °C - +225 °C)
Applications	For air and water lines and some special chemical fluid pass applications,

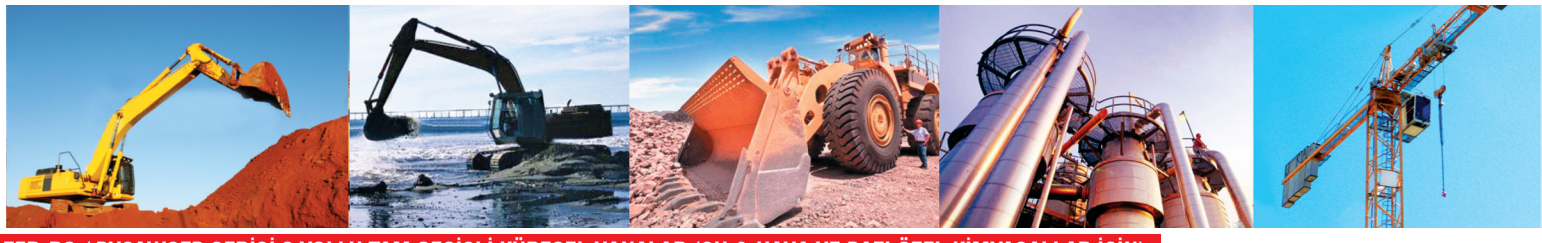



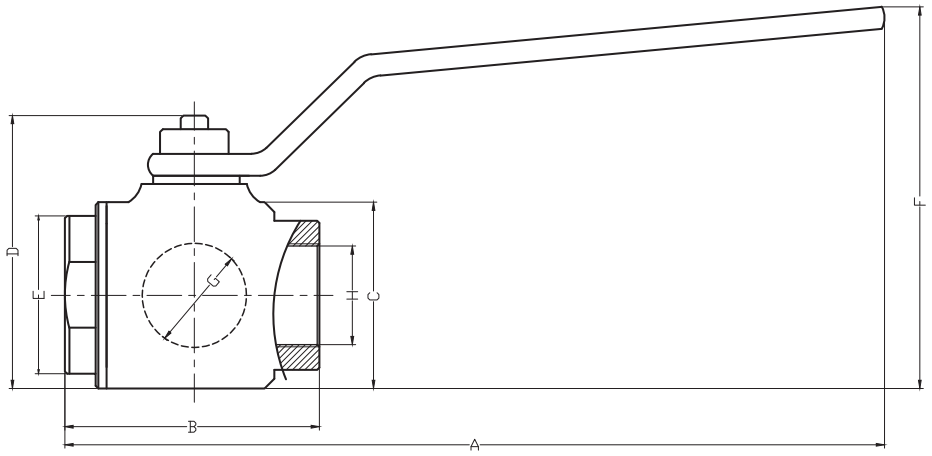



Teknik Özellikler
Technical Specifications

Kod (Code)	Vida Ölçücü (Thread Size) H	Çalışma Basıncı (Working Pressure) Bar	Ölçüler - mm (Dimensions - mm)						
			A	B	C	D	E	F	G
BV2AWCFBG112N	11/2" BSP	325	315	125	87	127	65	160	DN 38
BV2AWCFBG2N	2" BSP	325	330	145	104	148	80	180	DN 48











FER-RO / BV2AWCFB SERİSİ 2 YOLLU TAM GEÇİŞLİ KÜRESEL VANALAR (SU & HAVA VE BAZI ÖZEL KİMYASALLAR İÇİN)

FER-RO / BV2AWCFB SERIES 2 WAY FULL BORE BALL VALVES WATER & AIR & SOME SPECIAL CHEMICAL FLUIDS