





FLD SERİSİ HİDROLİK 3 YOLLU BASINÇ DUYARLI AKIŞ BÖLÜCÜ VALFLER (PRIORITY)

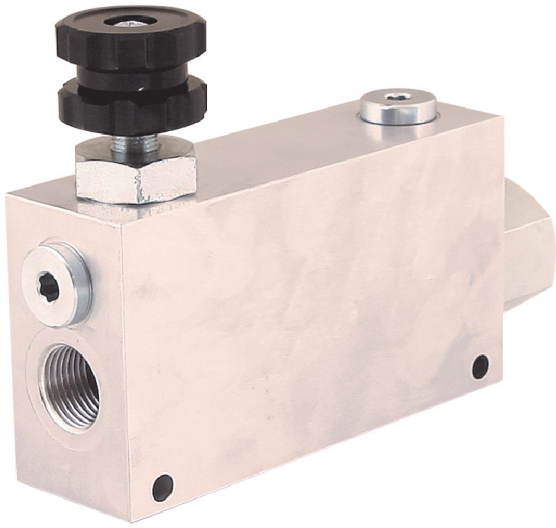

FLD serisi Hidrolik 3 yollu Basınç Duyarlı Akış Bölücü Valfler bir hidrolik devrede aynı pompadan gelen akışkanın iki ayrı silindir yada motora eşit yada farklı miktarda göndermesi ile aynı yada farklı hızlarda çalışmalarına imkan sağlarlar. Silindirlerin yada motorların hızlarını yavaşlatmak yada hızlandırmak için valf üzerinde bulunan kısma valfi ile B ve C hattının hızlarını kontrol edebilir.

Malzeme	Alüminyum
Vida Ölçüsü	BSP (İsteğe Bağlı: NPT, Metrik)
Sızdırmazlık	Nitril O-ring (NBR)
Çalışma Sıcaklığı	-30 °C ile +110 °C
Isıl İşlem	İç parçalarda
Kullanım Alanı	Genel hidrolik uygulamaları

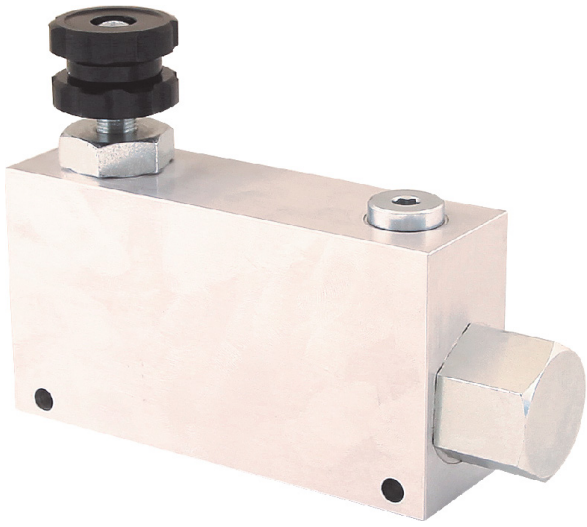

FLD SERIES HYDRAULIC 3-WAY PRESSURE DELICATE SPLITTER VALVES (PRIORITY)


FLD series Hydraulic 3-Way Pressure Delicate Splitter Valves enable them to operate at the same or different speeds in a hydraulic circuit by sending the fluid from the same pump to two separate cylinders or motors at equal or different rates. It can control the speeds of the B and C line with the throttle valve located on the valve to slow down or speed up the speeds of the cylinders or motors.

Material	Aluminium
Thread Size	BSP (Upon Request: NPT, Metric)
Sealing	Nitrile O-ring (NBR)
Working Temperature	-30 °C and +110 °C
Heat Treatment	Internal parts
Applications	General Hydraulic Applications







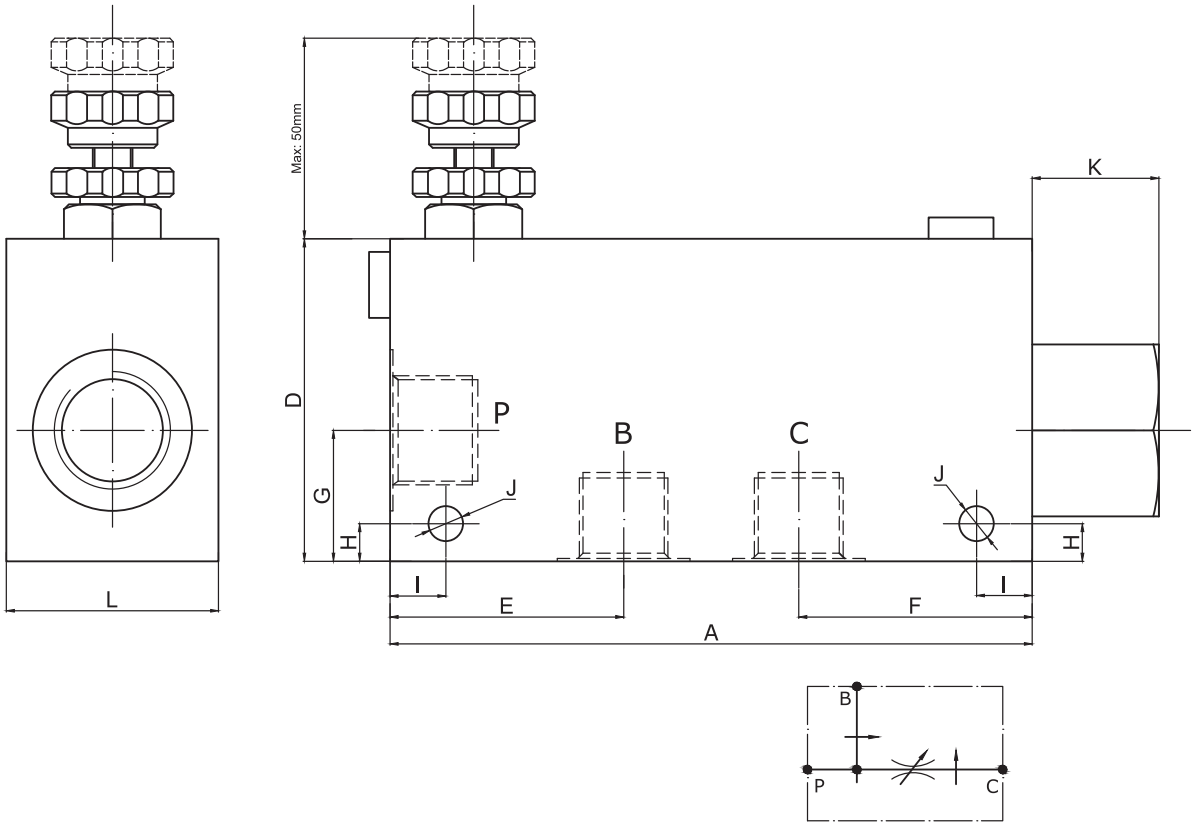

Teknik Özellikler
Technical Specifications

Kod (Code)	Vida Ölçüsü (Thread Size) P-B-C	Max. Yağ Akışı (Max. Flow) Lt / Min		Çalışma Basıncı (Working Pressure) Bar	Ölçüler - mm (Dimensions) - mm									
		Giriş Inflow P	Ayarlanan Regulated C		A	D	E	F	G	H	I	J	K	L
FLDP3G38N	3/8" BSP	60 l / min	35 l / min	270	130	74	48	45	28	7.50	10	6.50	38	39
FLDP3G12N	1/2" BSP	100 l / min	65 l / min	270	130	74	48	45	28	7.50	10	6.50	38	39
FLDP3G34N	3/4" BSP	150 l / min	90 l / min	270	155	89	57.50	53.50	34.50	7.75	10	8.50	35	49
FLDP3G1N	1" BSP	380 l / min	190 l / min	270	150	130	46	48	65	10	10	8.50	55	59