

TECHNICAL DATA

Maximum pressure	16 bar
Working temperature	0 ÷ +50 °C (–10° C with dry air)
Fluid	Compressed air
Port size	G 1/4
Pressure gauge port size	G 1/8
Flow rate at 6 bar ΔP=1 bar	260 Nl/min
Wall clamping screws	M4x50





DIMENSIONS AND WEIGHT - FR+L

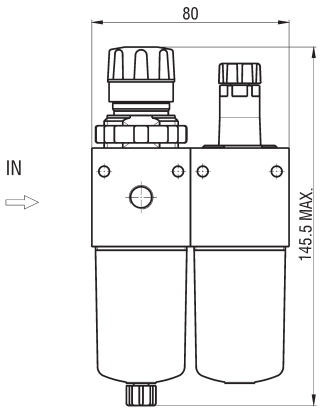

WEIGHT 415 g

ORDER KEY

UZRRM [ ] [ ] [ ] [ ] [ ] [ ] [ ] [ ]

- Series
- Size
- Adjusting range
- Degree of filtration
- Lubrication
- Bowl
- Condensate drainage system
- ATEX

SIZE

4	G 1/4

DEGREE OF FILTRATION

/3	0,2 ÷ 2 bar	/5	0,4 ÷ 4 bar
/7	0,8 ÷ 9 bar	/12	1,5 ÷ 12 bar

ADJUSTING RAGE

F5	5 µm	F20	20 µm
F40	40 µm		

LUBRICATION

L	Oil mist (standard)	LM	Micro-oil mist

BOWL

	Trasparent	/PM	Metallic protection
/TM	Metallic		

CONDENSATE DRAINAGE SYSTEM

	Manual	/SS	Semi-automatic

ATEX

/EX Consistent with the ATEX directive	II 2G Ex h IIC T5 Gb -10°C≤Ta≤50°C II 2D Ex h IIIC T100 °C Db X

P.S.: Filters reducers + lubricators can be supplied without the relieving seal on request; the series becomes **UZRM**...