
FLOW CONTROL VALVE


(Fully Adjustable Pressure Compensated Flow Control Valve with Reverse Flow Check and Sharp-Edge Orifice)

Ordering Code: **FR-16A-X-Y-Z**

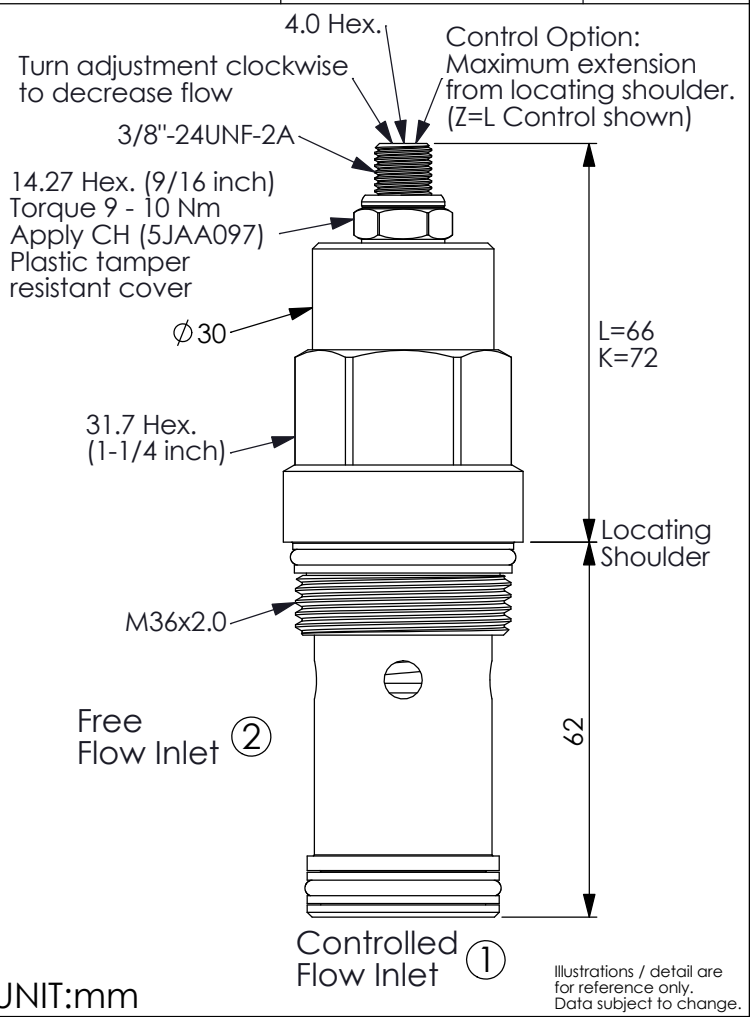

UNIT:mm

Illustrations / detail are for reference only. Data subject to change.

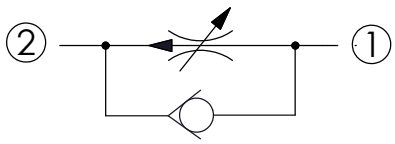


TECHNICAL DATA


Max. Operating pressure: 350		bar
Rated flow:	95	l/min
Cavity-Tooling:	16A-2	
Installation torque:	200 - 215	Nm
Weight:	0.52	kg

Accurate pressure compensated control requiresthat a 200 psi(14 bar) minimum pressure differential be maintained across the valve.

Typical Performance

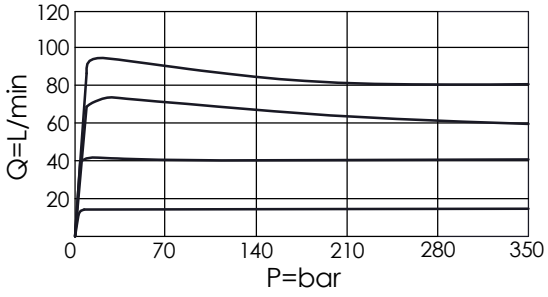


Reverse Free Flow with Needle Closed

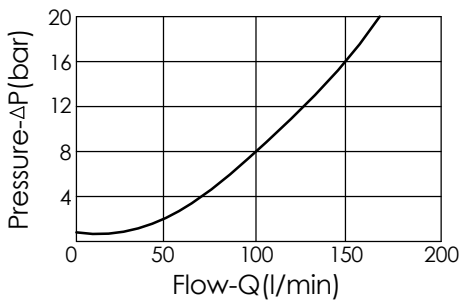

X	OPERATION	
20	Standard Type	

Y	FLOW SETTING	
A	0.8 - 95 LPM	
B	0.8 - 60 LPM	

Z	OPTIONS	
L	Leakproof hex. socket screw. 	
LP	Leakproof hex. socket screw. With Stainless Steel External Components 	
T	Three-winged Handknob Kit. 	
K	Handknob with Lock Knob. (Order Code: 6ZAK001) 	