
F11

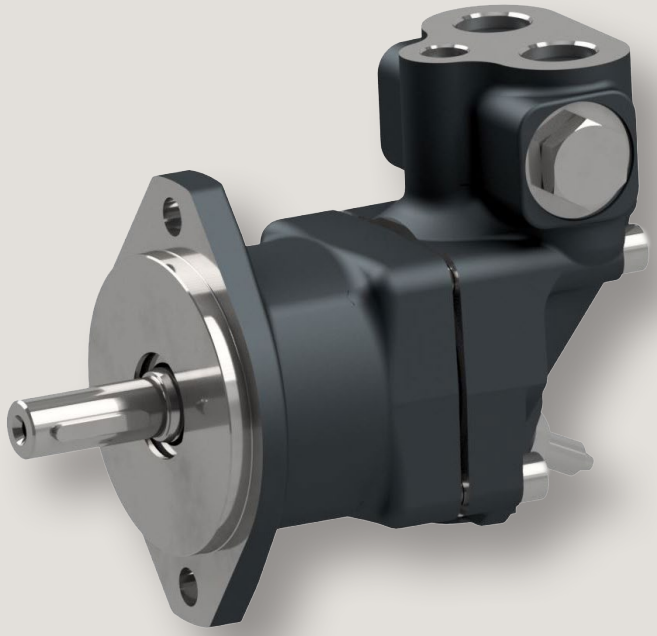

Content ..... Page

Specifications 25
Efficiency 26
Noise level 26
Selfpriming speed and required inlet pressure 27
Ordering codes
- F11-CETOP 28
- F11-ISO 29
- F11-SAE 30

Installation dimensions CETOP
- F11-005 31
- F11-006, -010 32
- F11-012 34
- F11-014 36
- F11-019 38

Installation dimensions ISO
- F11-006, -010 40
- F11-012 42
- F11-014 44

Installation dimensions SAE
- F11-006, -010 46
- F11-012 48
- F11-014 50
- F11-019 52

Frame size F11	**-005**	**-006**	**-010**	**-012**	**-014**	**-019**
Displacement [cm^3/rev]	4.9	6.0	9.8	12.5	14.3	19.0
[cu in/rev]	0.30	0.37	0.60	0.76	0.87	1.16
Operating pressure						
max intermittent[1)] [bar]	420	420	420	420	420	420
[psi]	6000	6000	6000	6000	6000	6000
max continuous [bar]	350	350	350	350	350	350
[psi]	5075	5075	5075	5075	5075	5075
Motor operating speed [rpm]						
max intermittent [1)]	14 000	11 200	11 200	10 300	9 900	8 900
max continuous [3)]	12 800	10 200	10 200	9 400	9 000	8 100
min continuous	50	50	50	50	50	50
Max pump selfpriming speed [2)]						
L or R function; max [rpm]	4 600	–	4 200	3 900	3 900	3 500
Motor input flow						
max intermittent[1)] [l/min]	69	67	110	129	142	169
[gpm]	18.2	17.7	29.1	34.1	37.5	44.6
max continuous [l/min]	63	61	100	118	129	154
[gpm]	16.6	16.1	26.4	31.2	34.1	40.7
Drain temperature[3)], max [°C] / [°F]	115/239	115/239	115/239	115/239	115/239	115/239
min [°C] / [°F]	-40/-40	-40/-40	-40/-40	-40/-40	-40/-40	-40/-40
Theoretical torque at 100 bar [Nm]	7.8	9.5	15.6	19.8	22.7	30.2
[lbft]	5.8	7.0	11.5	14.6	16.8	22.3
Mass moment of inertia						
($x10^{-3}$) [kg m^2]	0.16	0.39	0.39	0.40	0.42	1.1
($x10^{-2}$) [$lbft^2$]	0.38	0.92	0.92	0.95	1.00	2.61
Weight [kg]	4.7	6.5	6.5	7.5	7.5	11
[lb]	10.4	14.3	14.3	16.5	16.5	24.3

1) Intermittent: max 6 seconds in any one minute.
2) Selfpriming speed valid at sea level. Find more info on page 27
3) See also installation information. Page 85 – 87

Efficiency


Because of its high overall efficiency, driving a motor/pump from series F11 requires less fuel or electric power. Also, it allows the use of a small reservoir and heat exchanger, which in turn reduce cost, weight, and installation size.

The diagrams to the right show volumetric and mechanical efficiencies of an F11-5 motor.


F11-19 motors can be equipped with Power Boost which in high speed applications can decrease the mechanical losses by up to 15 %, see page 7.

Contact Parker Hannifin for efficiency information on a particular F11 frame size that is being considered.

Volumetric efficiencies

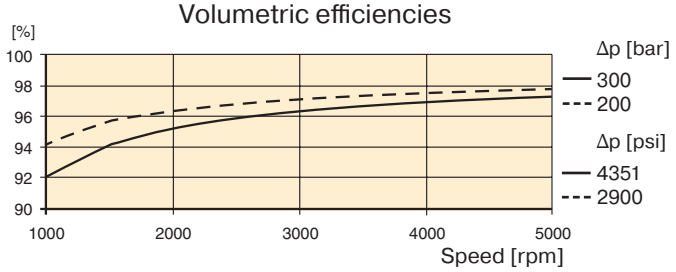

Mechanical efficiencies

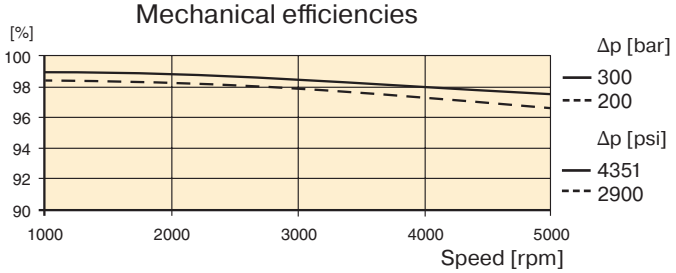


Noise level

Series F11 feature low noise levels from low to high speeds and pressures.

The noise level is measured in a semi-anechoic room, 1 m behind the unit. As an example, the diagram to the right shows the noise level of an F11-005.

The noise level for a particular motor/pump may vary ±2 dB(A) compared to what is shown in the diagram.

NOTE: Noise information for F11/F12 frame sizes are available from Parker Hannifin.

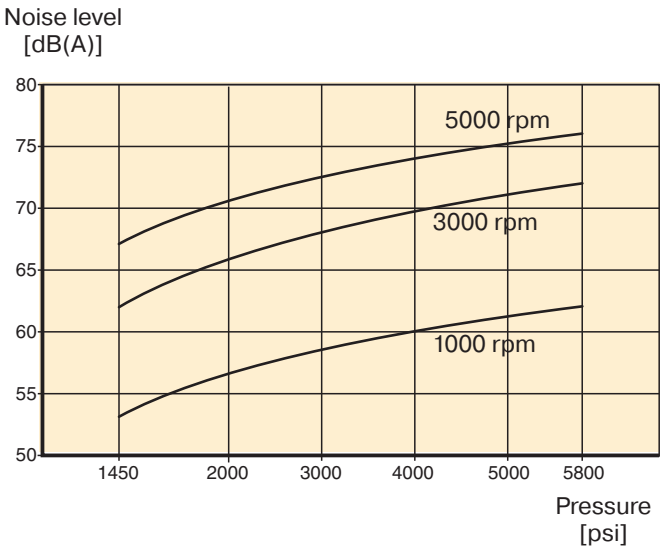

Parker Hannifin
Pump & Motor Division Europe
Trollhättan, Sweden

Selfpriming speed and required inlet pressure


Series F11

In pump applications, the F11 with function **L** (counter clockwise rotation) or **R** (clockwise rotation) is normally used. The L and R (pump) provide the highest self priming speeds (see table) as well as the lowest noise level. The **M** and **H** (motor) function can also be used as a pump, in either direction, but at a lower self priming speed.

Operating above the self priming speed (refer to Diagram 1) requires increased inlet pressure. As an example, at least 1.0 bar is needed when operating the F11-19-M as a pump at 3500 rpm. An F11 used as a motor (e.g. in a hydrostatic transmission), may sometimes operate as a pump at speeds above the selfpriming speed; this requires additional inlet pressure. Insufficient inlet pressure can cause pump cavitation resulting in greatly increased pump noise and deteriorating performance.

Function	**L** or **R**	**M**	**H**
F11-5	4600	3800	3200
F11-6		3100	
F11-10	4200	3100	2700
F11-12	3900	-	3000*
F11-14	3900	-	3000*
F11-19	3500	2400	2100

* Valve plate S



F11 Motor version

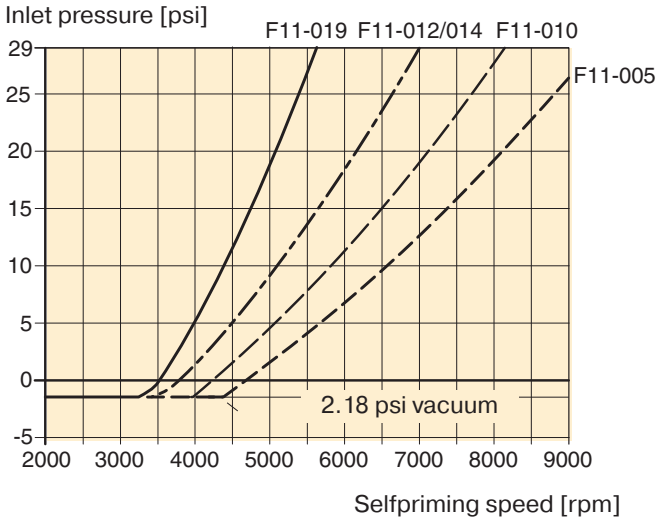


Diagram 1. Min required inlet pressure for Motor.

F11 Pump version

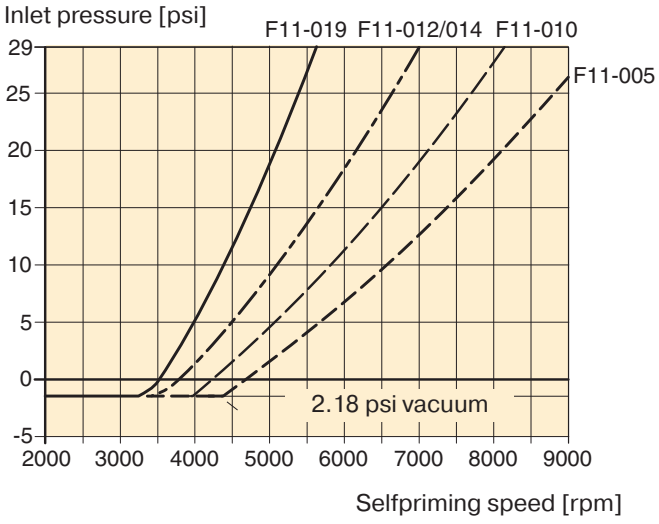


Diagram 2. Min required inlet pressure for Pump.

The inlet pressure can be charged by external pump, pressurized reservoir or using BLA Boost unit

Find more info about the BLA unit at page 84.

F11-CETOP

F11 – ☐ – ☐ ☐ ☐ – ☐ ☐ – ☐ ☐ – ☐ – ☐ – ☐

Frame size · Function · Main ports · Mounting flange · Shaft seal · Shaft · Version number · Option page 6 · Option page 7

Frame size		
Code	Displacem. (cm^3/rev)	Displacem. (cu in/rev)
005	4.9	0.30
006	6.0	0.37
010	9.8	0.60
012	12.5	0.76
014	14.3	0.87
019	19.0	1.16

Version number
(assigned for special versions)

Frame size		5	6	10	12	14	19
Code	Function						
M	Motor	x	x	x	-	-	x
Q	Motor, low noise	x	-	x	x	x	x
S	Motor, high speed	-	-	(x)	(x)	(x)	(x)
H	Motor, high pressure	(x)	-	(x)	-	-	(x)
R	Pump, clockwise rot'n	(x)	-	(x)	(x)	(x)	(x)
L	Pump, counter clockw.	(x)	-	(x)	(x)	(x)	(x)

For other versions, contact Parker Hannifin

Frame size		5	6	10	12	14	19
Code	Option						
0000	Standard	x	x	x	x	x	x
MUVR	Make up/Anti cavitation valve clockwise rotation	-	(x)	(x)	(x)	(x)	(x)
MUVL	Make up/Anti cavitation valve counter clockwise rotation	-	(x)	(x)	(x)	(x)	(x)

Frame size		5	6	10	12	14	19
Code	Shaft*						
K	Metric key	x	x	x	x	x	x
J	Metric key	(x)	(x)	(x)	(x)	-	-
P	Metric key	-	-	-	-	(x)	-
A	Spline, DIN 5480	-	(x)	(x)	(x)	-	-
D	Spline, DIN 5480	x	x	x	x	x	x
S	Spline, SAE	(x)	-	-	-	-	-
V	Tapered shaft	-	(x)	(x)	(x)	(x)	-

*See also dimensional drawings on pages 31 – 39.

Frame size		5	6	10	12	14	19
Code	Main ports						
B	BSP threads	x	x	x	x	x	x
U	SAE, UN threads	(x)	(x)	(x)	(x)	(x)	(x)

Frame size		5	6	10	12	14	19
Code	Mounting flange						
C	CETOP flange	x	x	x	x	x	x

Frame size		5	6	10	12	14	19
Code	Shaft seal						
V	FPM, high pressure, high temperature	x	x	x	x	x	x

For other versions, contact Parker Hannifin

x: Available (x): Optional – : Not available

Frame size		5	6	10	12	14	19
Code	Option						
00	Standard	x	x	x	x	x	x
P_	Prepared for speed sensor	-	x	x	x	x	x
B_	Power Boost and Prepared for speed sensor	-	(x)	(x)	(x)	(x)	(x)
_T	Painted Black	(x)	(x)	(x)	(x)	(x)	(x)

NOTE:
All combinations are not valid, please contact Parker Hannifin

F11-ISO

F11	–		–			–			–		–		–		–	
		Frame size		Function	Main ports		Mounting flange	Shaft seal		Shaft		Version number		Option page 6		Option page 7

Frame size			
Code	Displacem. (cm^3/rev)	Displacem. (cu in/rev)	
006	6.0	0.37	
010	9.8	0.60	
012	12.5	0.76	
014	14.3	0.87	

Version number
(assigned for special versions)

Frame size		6	10	12	14
Code	Function				
M	Motor	x	x	-	-
Q	Motor, low noise	-	x	x	x
S	Motor, high speed	-	(x)	(x)	(x)
H	Motor, high pressure	-	(x)	-	-
R	Pump, clockwise rot'n	-	(x)	(x)	(x)
L	Pump, counter clockw.	-	(x)	(x)	(x)

For other versions, contact Parker Hannifin

Frame size		6	10	12	14
Code	Option				
0000	Standard	x	x	x	x
MUVR	Make up/Anti cavitation valve clockwise rotation	(x)	(x)	(x)	(x)
MUVL	Make up/Anti cavitation valve counter clockwise rotation	(x)	(x)	(x)	(x)

Frame size		6	10	12	14
Code	Main ports				
F	Metric threads	-	x	x	x
B	BSP threads	x	(x)	(x)	(x)
M	Side ports, metric	-	(x)	(x)	(x)

Frame size		6	10	12	14
Code	Shaft*				
K	Metric key	x	x	x	x
J	Metric key	(x)	(x)	(x)	-
P	Metric key	-	-	-	(x)
A	Spline, DIN 5480	(x)	(x)	(x)	-
D	Spline, DIN 5480	x	x	x	x
V	Tapered shaft	(x)	(x)	(x)	(x)

*See also dimensional drawings on pages 41 – 45.

Frame size		6	10	12	14
Code	Mounting flange				
I	ISO flange	x	x	x	x

Frame size		6	10	12	14
Code	Shaft seal				
V	FPM, high pressure, high temperature	x	x	x	x

For other versions, contact Parker Hannifin

x: Available (x): Optional – : Not available

Frame size		6	10	12	14
Code	Option				
00	Standard	x	x	x	x
P_	Prepared for speed sensor	x	x	x	x
B_	Power Boost and Prepared for speed sensor	(x)	(x)	(x)	(x)
_T	Painted Black	(x)	(x)	(x)	(x)

NOTE:
All combinations are not valid, please contact Parker Hannifin

F11-SAE

F11 – [ ] – [ ] [ ] – [ ] [ ] – [ ] [ ] – [ ] – [ ] [ ]

Frame size · Function · Main ports · Mounting flange · Shaft seal · Shaft · Version number · Option page 6 · Option page 7

Frame size		
Code	Displacem. (cm^3/rev)	Displacem. (cu in/rev)
006	6.0	0.37
010	9.8	0.60
012	12.5	0.76
014	14.3	0.87
019	19.0	1.16

Version number
(assigned for special versions)

Frame size		6	10	12	14	19
Code	Function					
M	Motor	x	x	-	-	x
Q	Motor, low noise	-	x	x	x	x
S	Motor, high speed	-	(x)	(x)	(x)	(x)
H	Motor, high pressure	-	(x)	-	-	(x)
R	Pump, clockwise rot'n	-	(x)	(x)	(x)	(x)
L	Pump, counter clockw.	-	(x)	(x)	(x)	(x)

For other versions, contact Parker Hannifin

Frame size		6	10	12	14	19
Code	Option					
0000	Standard	x	x	x	x	x
MUVR	Make up/Anti cavitation valve clockwise rotation	(x)	(x)	(x)	(x)	(x)
MUVL	Make up/Anti cavitation valve counter clockwise rotation	(x)	(x)	(x)	(x)	(x)

Frame size		6	10	12	14	19
Code	Shaft*					
T	SAE key	-	-	-	x	x
S	SAE spline	x	x	x	x	x
K	Metric key	x	x	x	-	-
J	Metric key	(x)	(x)	(x)	-	-
V	Tapered shaft	(x)	(x)	(x)	(x)	-

*See also dimensional drawings on pages 46 – 53.

Frame size		6	10	12	14	19
Code	Main ports					
U	SAE, UN threads	x	x	x	x	x
B	BSP threads	(x)	(x)	(x)	(x)	(x)

Frame size		6	10	12	14	19
Code	Mounting flange					
S	SAE flange	x	x	x	x	x

Frame size		6	10	12	14	19
Code	Shaft seal					
V	FPM, high pressure, high temperature	x	x	x	x	x

For other versions, contact Parker Hannifin

x: Available (x): Optional – : Not available

Frame size		6	10	12	14	19
Code	Option					
00	Standard	x	x	x	x	x
P_	Prepared for speed sensor	x	x	x	x	x
B_	Power Boost and Prepared for speed sensor	(x)	(x)	(x)	(x)	(x)
_T	Painted Black	(x)	(x)	(x)	(x)	(x)

NOTE:
All combinations are not valid, please contact Parker Hannifin