

TECHNICAL DATA

Maximum pressure	16 bar
Working temperature	0 ÷ +50 °C (–10 °C with dry air)
Fluid	Compressed air
Port size	G 3/8 - G 1/2 - G 1
Pressure gauge port size	G 1/8
Flow rate at 6 bar ΔP=1 bar	G 3/8 = 680 Nl/min G 1/2 = 1200 Nl/min G 1 = 2300 Nl/min
Wall clamping screws	G 3/8: M4x60 G 1/2: M5x70 G 1: M6x90





DIMENSIONS AND WEIGHTS - FR+L

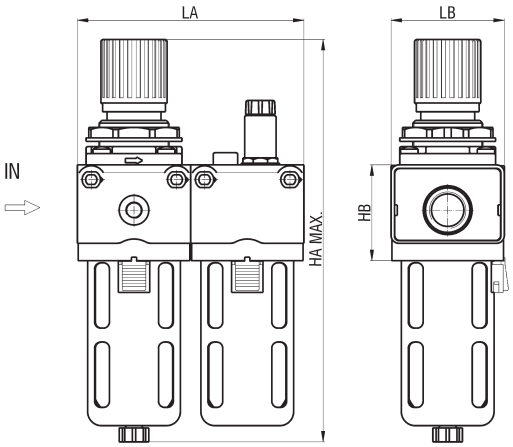

SIZE	HA	HB	LA	LB	WEIGHT (g)
3	193	52	104	50	940
2	231	55	130	65	1065
1	337	76	167	82	4695

ORDER KEY

EZRR [ ] [ ] [ ] [ ] [ ] [ ] [ ]

- Series
- Size
- Adjusting range
- Degree of filtration
- Lubrication
- Bowl
- Condensate drainage system
- ATEX

SIZE
3 G 3/8 — 2 G 1/2
1 G 1

ADJUSTING RANGE
/3 0,2 ÷ 2 bar — /5 0,4 ÷ 4 bar
/7 0,8 ÷ 8 bar

DEGREE OF FILTRATION
F5 5 µm* — F20 20 µm
F40 40 µm

LUBRICATION
L Oil mist (standard) — LCA Oil mist, N.O. electric contact
LCC Oil mist, N.C. electric contact

BOWL
Trasparent — /PM Protection**

CONDENSATE DRAINAGE SYSTEM
/SM Manual — /SS Semi-automatic
/SA Automatic***

ATEX
/EX Consistent with the ATEX directive Ⓔx II 2G Ex h IIC T5 Gb -10°C≤Ta≤50°C
II 2D Ex h IIIC T100 °C Db X

* Available only for sizes 3 and 2
** Metallic as standard for sizes 2 and 1, made of glass stiffened polyamide on request for size 3
*** Available only for sizes 2 and 1
P.S.: Filters reducers + lubricators can be supplied without the relieving seal on request; the series becomes **EZR**...