CLA Resistance Type Oil Manual Lubricator


CHEN YING



CLA-6-D-H-1



CLA-8-R-H-1

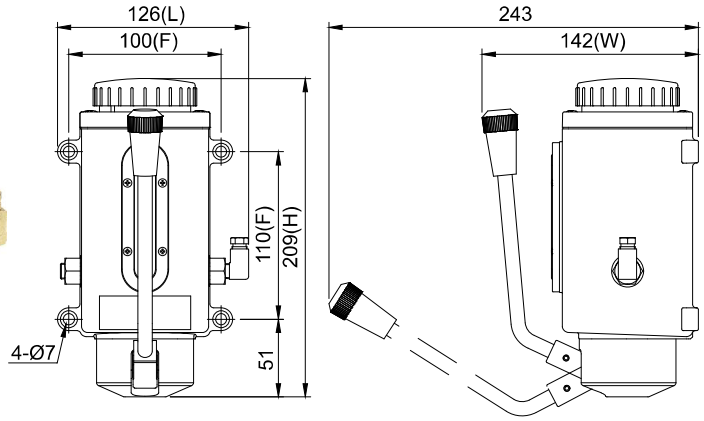

Dimensional Drawing of CLA-8-R-H-1

◆Features

1. The compact size of CLA makes the installation easy.
2. CLA discharges oil whenever its handle is pulled.
3. The outlet of CLA can be on either the right side or the left side of the handle. A dual-outlet model is also available for selection.
4. CLA has a reverse stopper that prevents the back-flow of oil.
5. CLA can work with machines that do not require oil feeding at a particular time.

◆Technical Data & Dimensional Data

Model	Tank Capacity	Length (mm)	Width (mm)	Height (mm)	Fixed Hole Distance (mm)	Max. Discharge Volume	Max. Operating Pressure	Suitable Viscosity	Discharge Bore	Outlet Number	N.W. (kg)
CLA-6	350cc	111	137	188	85x85	8cc/stroke	15 kgf/cm²	Oil 32-68 cSt@40°C	Ø4	1	1.23
										2	1.25
									Ø6	1	1.24
										2	1.27
CLA-8	600cc	126	142	209	100x110				Ø4	1	1.50
										2	1.52
									Ø6	1	1.50
										2	1.53

◆Order Code

CLA — 8 — R — H — 1

Tank Capacity	
6	350cc
8	600cc

Outlet Type	
L	Left Outlet
R	Right Outlet
D	Dual Outlets

Outlet Adapter	
D	Straight Adapter
H	Elbow Adapter

Discharge Bore	
0	Ø4
1	Ø6

◆Related Products


P. 81


P. 82


P. 87


P. 111


P. 113


P. 122


P. 126


P. 125


P. 129