

REDUCING/RELIEVING VALVE
(Direct Acting)

Ordering Code: **PD-17A-X-Y-Z**

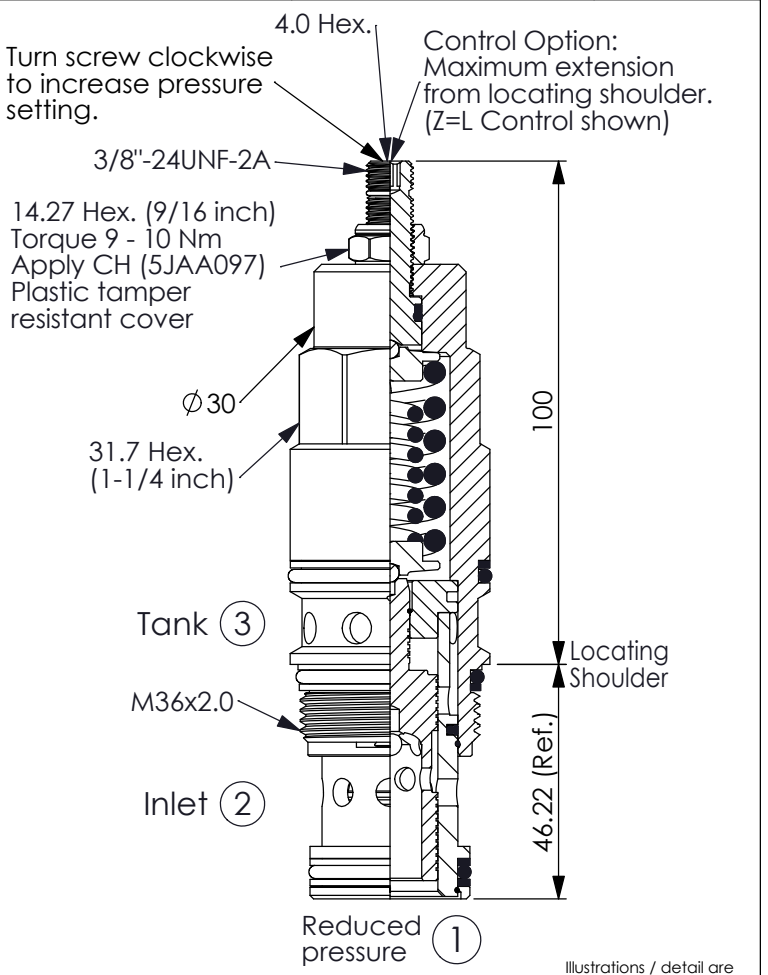


UNIT:mm

Illustrations / detail are for reference only. Data subject to change.

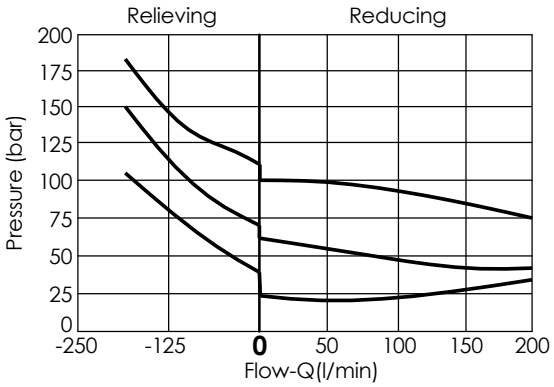



Y	SPRINGS	
	ADJUSTMENT RANGES	
A	50 - 210 bar (70 bar Standard Setting)	
B	20 - 105 bar (35 bar Standard Setting)	
D	14 - 55 bar (28 bar Standard Setting)	
E	7 - 28 bar (14 bar Standard Setting)	
W	76 - 315 bar (76 bar Standard Setting)	

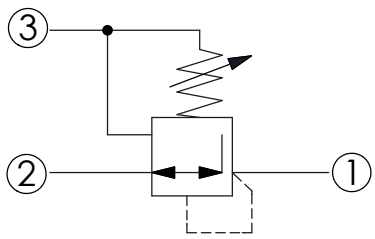

TECHNICAL DATA		
Max.Operating pressure:	350	bar
Rated flow:	160	l/min
Cavity-Tooling:	17A-3	
Installation torque:	200 - 215	Nm
Weight:	0.675 (**Z**=L)	kg

X	OPERATION	
30	Standard Type	

· Maximum Leakage Approximately (65 cc/min./70 bar)

Z	OPTIONS		
L	Leakproof hex. socket screw.		
LP	Leakproof hex. socket screw. With stainless steel external metal components		
C	Stainless Steel Tamper Resistant Cover.		
K	Handknob with Lock Knob. (Order Code: 6ZAK001)	