

REDUCING/RELIEVING VALVE
(Direct Acting)

Ordering Code:	**PD-2A-X-Y-Z**

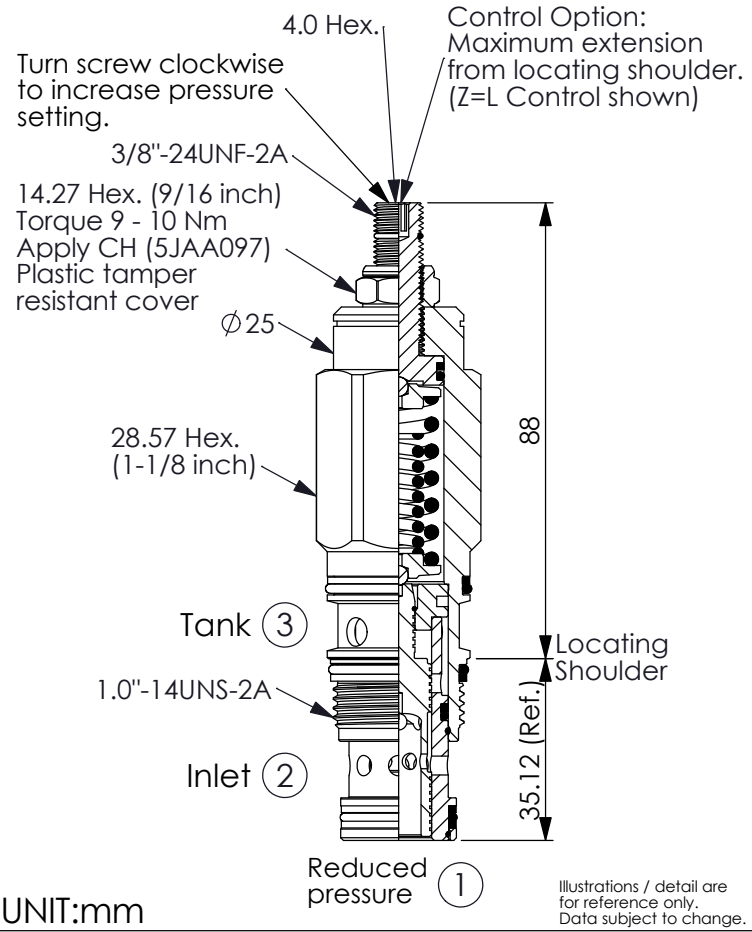


UNIT:mm

Illustrations / detail are for reference only. Data subject to change.

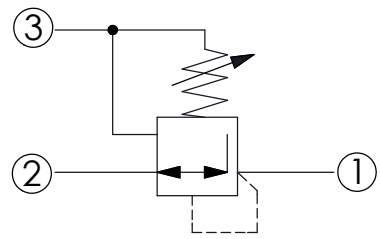

TECHNICAL DATA



Max.Operating pressure:	350	bar
Rated flow:	80	l/min
Cavity-Tooling:	2A-3	
Installation torque:	60 - 70	Nm
Weight:	0.343 (**Z**=L)	kg

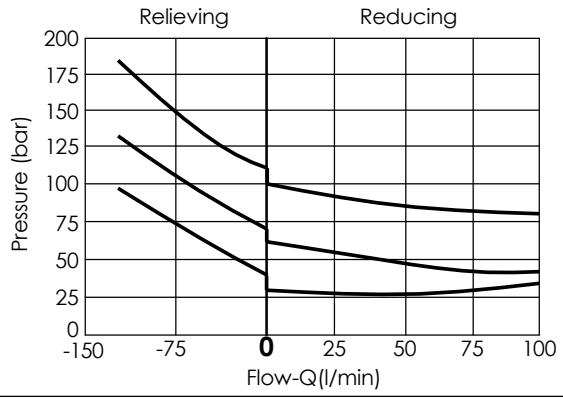

X	**OPERATION**	
30	Standard Type	

· Maximum Leakage Approximately (50 cc/min./70 bar)

Y	**SPRINGS**	
	ADJUSTMENT RANGES	
A	50 - 210 bar (70 bar Standard Setting)	
B	20 - 105 bar (35 bar Standard Setting)	
D	14 - 55 bar (28 bar Standard Setting)	
E	7 - 28 bar (14 bar Standard Setting)	
S	3.5 - 14 bar (7 bar Standard Setting)	
W	70 - 315 bar (70 bar Standard Setting)	

Z	**OPTIONS**		
L	Leakproof hex. socket screw.		
C	Stainless Steel Tamper Resistant Cover.		
K	Handknob with Lock Knob. (Order Code: 6ZAK001)		