Circuit switch valves

Connection: 1/8", 1/4"

CIRCUIT SWITCH VALVES





- Ideal for industrial applications
- High flow rate
- Anodised aluminium body
  NBR gaskets
- Automatical operation - OR function

TECHNICAL FEATURES	
Function	Circuit switch valve - OR function
Operation	Automatic
Materials	Body in anodised aluminium alloy - Internal components in brass NBR gaskets
Note on materials	Compliant with REACH (1907/2006/EC and subsequent amendments)
Connections	1/8", 1/4" Gas
Threads	Cylindrical Gas (BSPP)
Operating temperature	0°C ÷ +80°C (-20°C with dry air, to avoid ice formation)
Operating pressure	0 ÷ 10 bar
Fluid	Filtered air, lubrication-free, compliant with ISO 8573-1:2010 [7:4:4]
Lubrication	Not required (if required in the pneumatic circuit, it must be continuous)

CIRCUIT SWITCH VALVES

AUTOMATIC OPERATION - "OR" FUNCTION

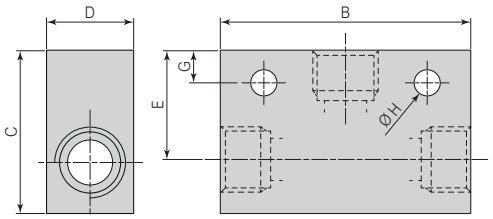

Symbol	Connections	B	C	D	E	F	G	H	I	Code
	Gas 1/8"	40	20	15	12,5	25	4	4,5	4,5	SLT-8
	Gas 1/4"	46	30	16	20	30	6	6	4,5	SLT-4

Standard sales terms and conditions available on www.bonesipneumatik.it