

BADESTNOST AD 6200 Chirpan, Bulgaria, Tel: 00359 416 930 12, Fax: 00359 416 955 34
E –mail: badestnost@hydraulic–vlv.com www.hydraulic–vlv.com

REMOTE CONTROLS
Управление тросом

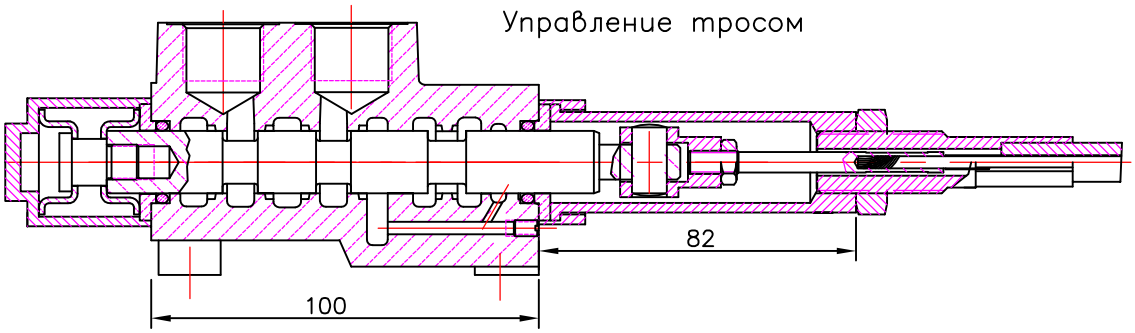

P40 A1G — spool valve
V1(l= . . .)+ — cable
3047 — control body

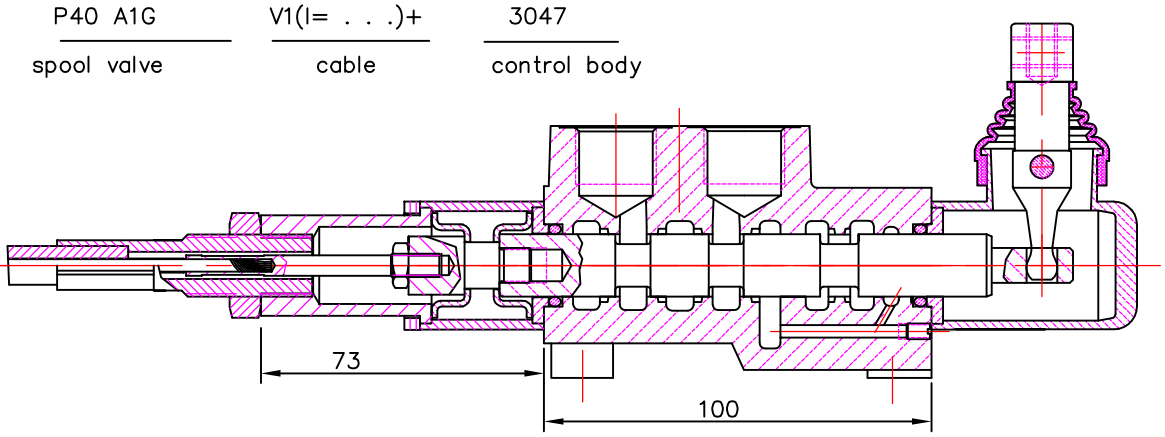


P40 A1GKZ — spool valve
V2(l= . . .)+ — cable
3047 — control body

Cable "INDEMAR" Cod. IT 3056 /l=1.00; 1.50; 2.00; 2.50; 3.00 m/

+control body "INDEMAR"
code 3047, 3076, 3077

Technical specifications			
	3047	3076	3077
Stroke	13+13 mm	13+13 mm	13+13 mm
Max. load	45 kg	45 kg	45 kg
Level ratio	10:1	10:1	10:1
Lock in neutral	No	No	Yes
Antireverse lock	No	Yes	No
Body colour	Black	Black	Black
Cables type	Heavy Duty	Heavy Duty	Heavy Duty
Operating temperature	–40/+80C	–40/+80C	–40/+80C

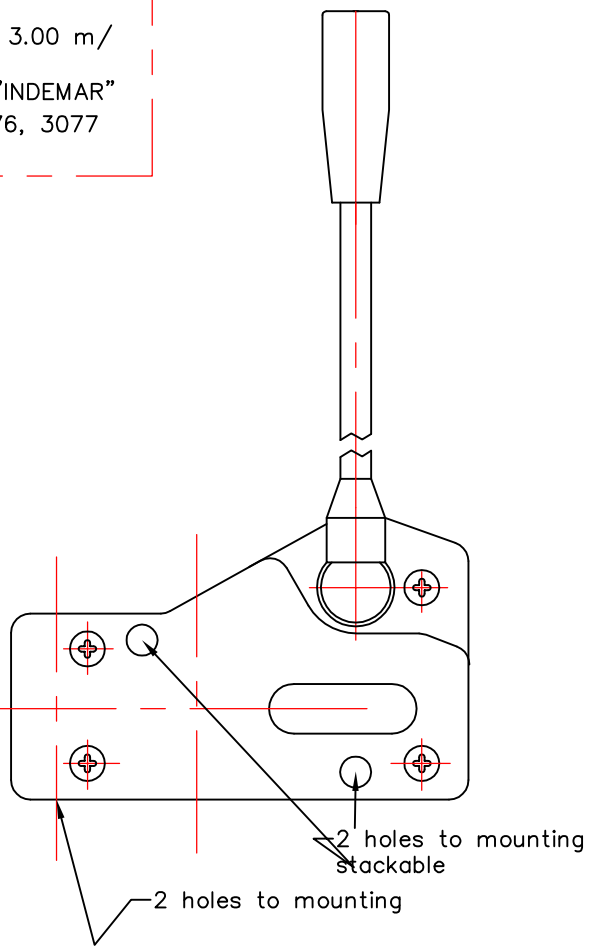

High solidity controls for easy mounting on every type of distributor.They can by mounted stand alone or packed together.
They use push–pull heavy duty cables that provide a positive smooth operating lever and are manifactured in a three differents models to meet different needs of Clients.