

COM Oil-Mist Type Pneumatic Lubricator



COM-01

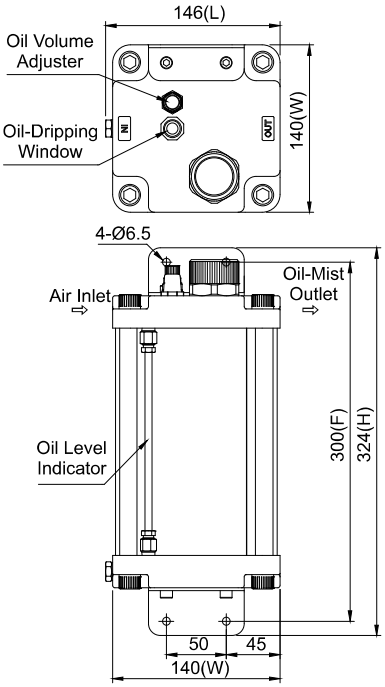


Dimensional Drawing of COM-01

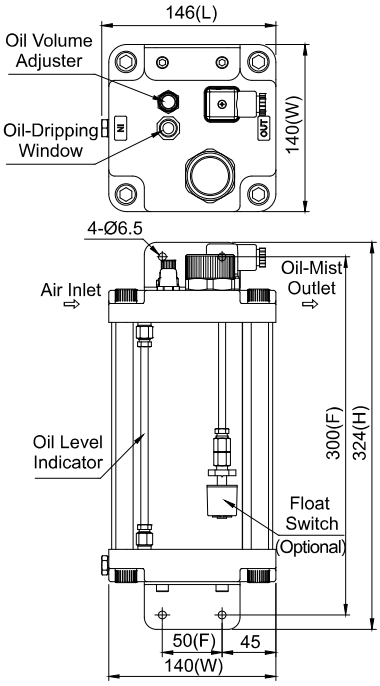

Dimensional Drawing of COM-01-SC



OB Spray Gun

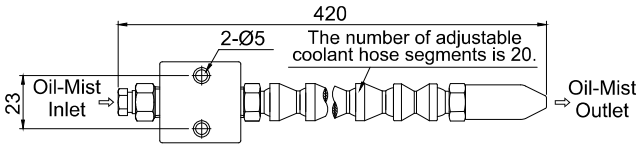

Dimensional Drawing of OB Spray Gun

◆Features

1. With its superior oil-mist mixture, COM is suitable for high-speed cutting machines, special processing machines, and machines that need large-area lubrication and cooling effects.
2. COM requires 4-8kgf/cm² pneumatic pressure supply to operate.
3. COM has an oil volume adjuster that enables the users to adjust the discharge volume upon the need.
4. COM has an oil-dripping window that enables the users to check if COM discharges oil normally.
5. COM has an oil level indicator that enables the users to check the oil level inside the oil tank. A float switch can be added to COM on request to detect the oil level automatically.
6. Recommend adding an OB spray gun to COM outlet for lubricating a non-fixed lubrication point. A magnetic base can be added to an OB spray gun on request, enabling it to be fixed on any magnetic metal surface at any angle and relocated quickly. The net weight of OB spray gun is 149g.
7. COM is suitable for oil and cutting fluid.

◆Technical Data & Dimensional Data

Tank Capacity	Length (mm)	Width (mm)	Height (mm)	Fixed Hole Distance (mm)	Pneumatic Pressure	Air Inlet Thread	Oil-Mist Outlet Thread	Suitable Temperature	Suitable Viscosity	N.W. (kg)
2L	146	140	324	300	4-8 kgf/cm²	PT1/4	PT1/4	5-60°C	22-68 cSt@40°C	4.1

◆Order Code

COM — 01 — ※

Tank Capacity	
01	2L

Special Request	
OB	Add an OB Spray Gun
BM	Add an OB Spray Gun with a Magnetic Base
SC	Add a NC Contact Float Switch
SO	Add a NO Contact Float Switch

◆Related Products



P. 33 P. 111 P. 113 P. 120 P. 127 P. 126 P. 125 P. 127 P. 129