

PRSQ SERİSİ HAT TİPİ DIŞTAN BASINÇ AYARLI BASINÇ SIRALAMA VALFLERİ

PRSQ serisi Hat Tipi Dıştan Basınç Ayarlı Sıralama Valfleri bir hidrolik devrede birden fazla sayıdaki silindir, motor gibi kullanıcı elemanları farklı zamanlarda ve basınçlarda çalıştırmak için kullanılır. Normalde kapalı konumdadır. İstenilen basınçta açılıp diğer kullanıcı elemanları harekete geçirir ve aynı hat üzerinde basınç oluşmadan geri dönüşe izin verirler.


Malzeme	Otomat Çeliği
Vida Ölçüsü	BSP (İsteğe Bağlı: NPT, Metrik)
Sızdırmazlık	Nitril O-ring (NBR)
Çalışma Sıcaklığı	-30 °C ile +110 °C
Isıl İşlem	İç parçalarda
Kullanım Alanı	Genel hidrolik uygulamaları



PRSQ SERIES EXTERNAL PRESSURE REGULATOR PRESSURE SEQUENCE VALVES


The PRSQ Series External Pressure Regulator Pressure Sequence Valves are used to operate multiple cylinders, motors and user elements at different times and pressures in a hydraulic circuit. Their standard position is Normally Closed. They open at the desired pressure and activate other user elements and allow them to return without pressure on the same line.


Material	Carbon Steel
Thread Size	BSP (Upon Request: NPT, Metric)
Sealing	Nitrile O-ring (NBR)
Working Temperature	-30 °C and +110 °C
Heat Treatment	Internal parts
Applications	General Hydraulic Applications

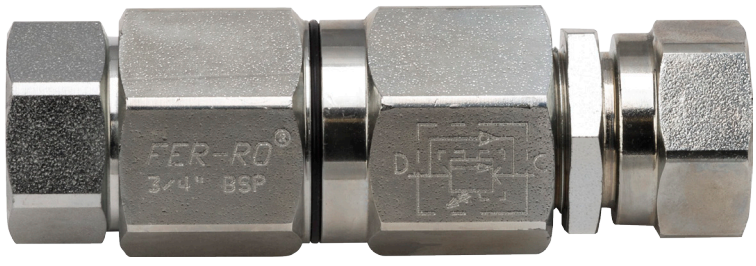






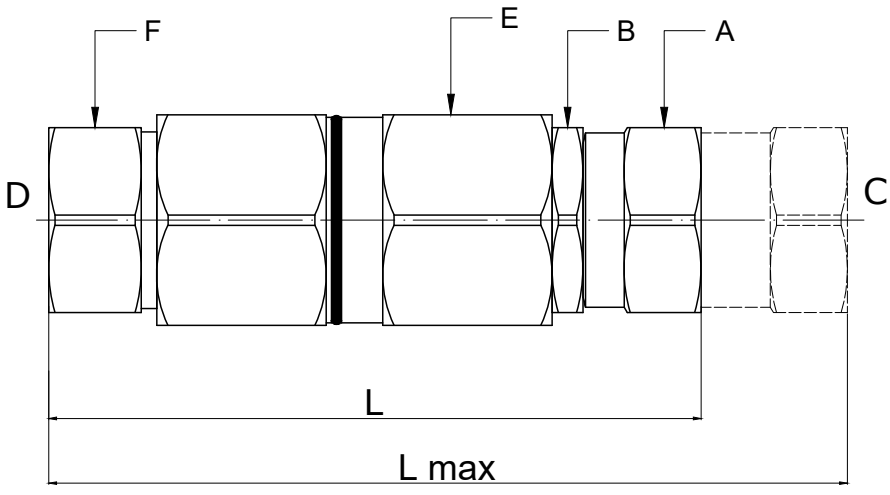





Teknik Özellikler
Technical Specifications

Kod (Code)	Vida Ölçücü (Thread Size) D-C	Çalışma Basıncı (Working Pressure) Bar	Max. Yağ Akışı (max. Flow) Lt / Min	Tur Başı Basınç Artışı (Pressure Increase)	Ölçüler - mm (Dimensions - mm)						
					L	L max	A	B	E	F	G
PRSQECG38N	3/8" BSP	20 - 200 Bar	-	~ 50 Bar / Turn	-	-	-	-	-	-	-
PRSQECG12N	1/2" BSP	20 - 200 Bar	60 lt / min	~ 50 Bar / Turn	129.50	136.50	AA36	AA36	AA41	AA36	46
PRSQECG34N	3/4" BSP	20 - 200 Bar	120 lt / min	~ 50 Bar / Turn	129.50	136.50	AA36	AA36	AA41	AA36	46

