

RELIEF VALVE
(Differential Area, Poppet)

Ordering Code:	**RD-10W-X-Y-Z**

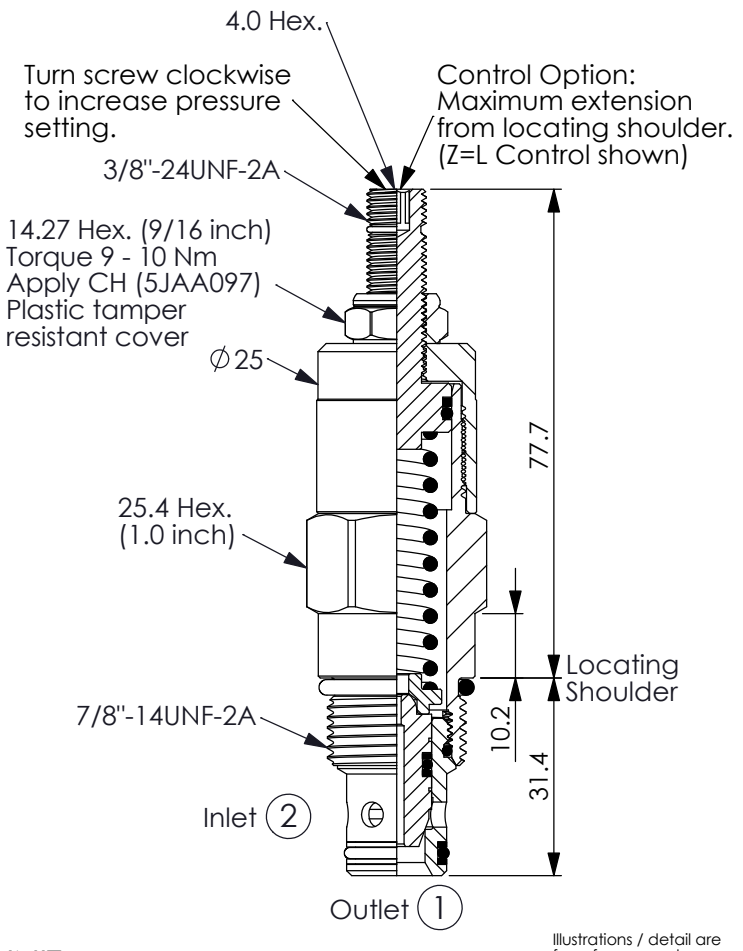

UNIT:mm


Illustrations / detail are for reference only. Data subject to change.

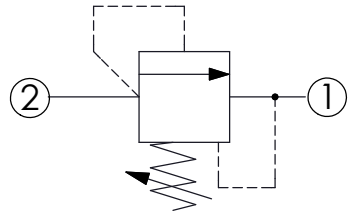

TECHNICAL DATA

Max. pressure:	350	bar
Rated flow:	75	l/min
Cavity-Tooling:	10W-2	
Installation torque:	35 - 45	Nm
Weight:	0.23 (**Z**=L)	kg



Port (2) is rated for full system pressure and is suitable for cross-relief valve circuit applications.
For such applications, please contact Winner's sales department.

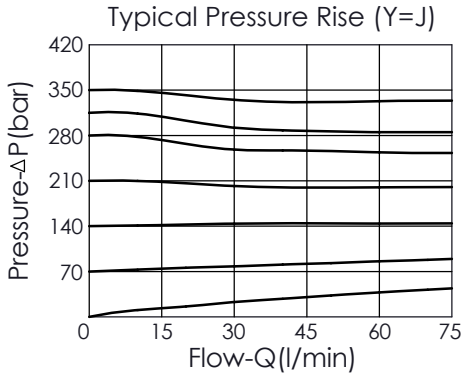

X	OPERATION	
2A	(2) to (1) (P to T)	

- Response Time-Typical (2 ms)
- Maximum Leakage Approximately (5 drops/min. to 85% of nominal setting)
- Dirt tolerant

Y	PRESSURE SETTING	
B	10 - 105 bar (70 bar Standard Setting)	
D	10 - 55 bar (28 bar Standard Setting)	
J	34 - 350 bar (70 bar Standard Setting)	
W	17 - 250 bar (70 bar Standard Setting)	

Z	OPTIONS		
L	Leakproof hex. socket screw.		
C	Stainless Steel Tamper Resistant Cover.		
T	Three-winged Handknob Kit.		
K	Handknob with Lock Knob. (Order Code: 6ZAK001)	