

SOLENOID OPERATED VALVE
Continuous Duty Coils-ED 100%


Ordering Code:	**EC-16B-X-Y-Z**

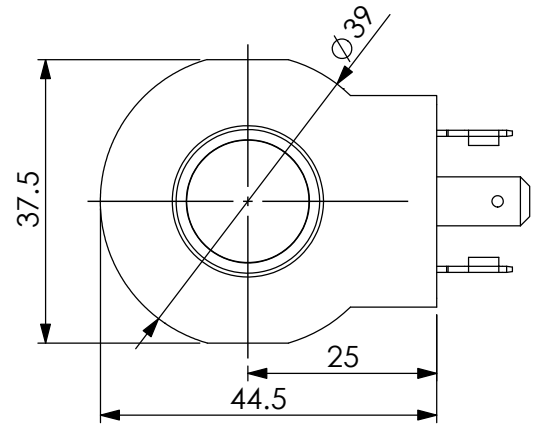

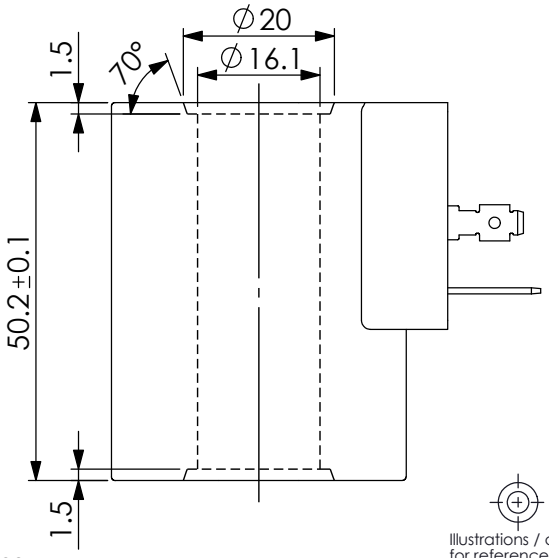

UNIT:mm

Illustrations / detail are for reference only. Data subject to change.

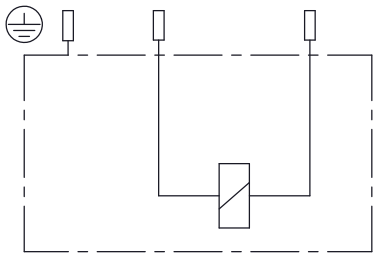

TECHNICAL DATA

Weight:	0.24 kg
HEAT INSULATION CLASS H:	
356°F	(180°C)
Ambient temperature range:	
-22+140°F	(-30+60°C)

Available on request:
Different Voltages -
Different connectors.

Inlet voltage fluctuations must not exceed ± 10% of nominal voltage to obtain correct operation and long life of coils.

Winner Coil Using Notice:
Please refer Winner technical information.
(T.101.105.E Winner Coil Using Notice)

CE approved, **UKCA** approved

X	Power (W)	
260	26 Watt.	

Y	Connections	
H	Connessione A EN 175301-803 ISO 4400 (DIN 43650)	

Z	Voltage (V)		Resistance (Ω)	Current (A)		
	Nominal		20~25°C	Cold Coil	Hot Coil	
B	110V RAC	When ordering RAC coils, please make sure also to order **ED-30-R-01-A** so as to ensure that the solenoid valves can operate properly.	370±7%	0.25	0.17	
A	220V RAC		1410±7%	0.12	0.09	
E	12V DC		5.5±7%	2.05	1.43	
D	24V DC		21.0±7%	1.10	0.75	