

POV SERİSİ PULLUK DÖNDÜRME VALFLERİ



POV Serisi Pulluk Döndürme Valfleri, pulluğu döndürebilen hidrolik silindirin hareketini otomatik olarak tersine çevirmek için silindirlerde kullanılmak üzere tasarlanmış valftir. Daha fazla güvenlik sağlayan ve silindiri herhangi bir noktada konumlandırma ve kilitleme imkânı veren ikiz kitleme valfi bulunmaktadır. Valfler yaklaşık 150 Bar'lık bir değişim basıncı ile beslenir. Tarım alanında geniş kapsamlı kullanılmaktadır.

Malzeme	Alüminyum
Vida Ölçüsü	BSP
Sızdırmazlık	Nitril O-ring (NBR)
Çalışma Sıcaklığı	-30 °C ile +110 °C
Isıl İşlem	İç parçalarda
Kullanım Alanı	Genel Tarım uygulamaları


POV SERIES PLOUGH OVERTURNING VALVES



POV Series Plough Overturning Valves, a valve designed for use in cylinders to automatically reverse the motion of the hydraulic cylinder that can rotate the plow. There is a double pilot operated check valve that provides more security and allows positioning and locking the cylinder at any point. The valves are fed with a change pressure of approximately 150 Bar. It uses it extensively in the field of agriculture.


Material	Aluminium
Thread Size	BSP
Sealing	Nitrile O-ring (NBR)
Working Temperature	-30 °C and +110 °C
Heat Treatment	Internal parts
Applications	General Agricultural Applications




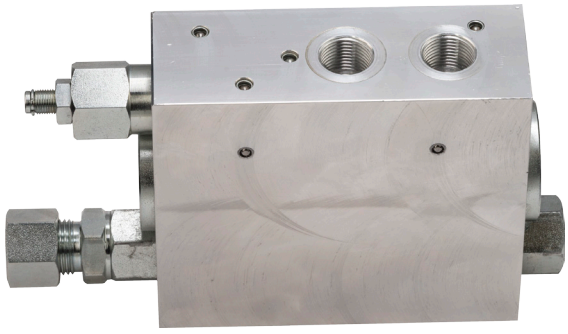






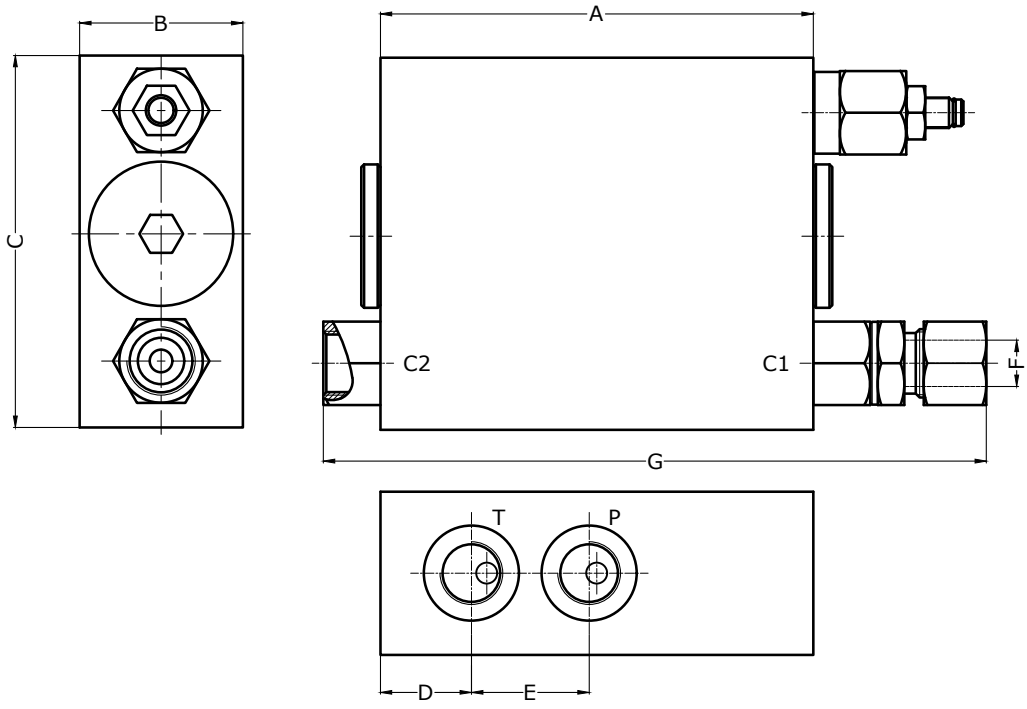

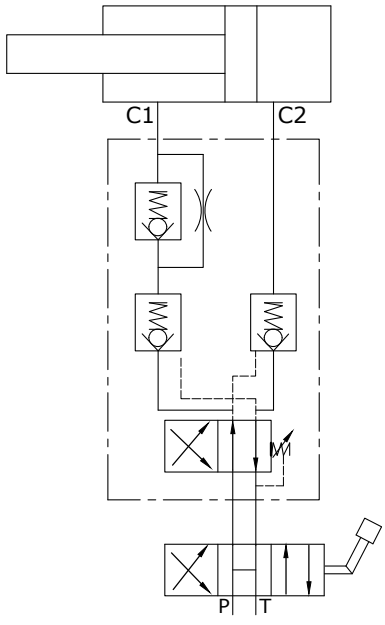

Teknik Özellikler
Technical Specifications

Kod (Code)	Vida Ölçüsü (Thread Type) P-T-C2	Çalışma Basıncı (Working Pressure) Bar	Tip (Type)	Max. Yağ Akışı (Max. Flow) L/Min	Ölçüler - mm (Dimensions - mm)						
					A	B	C	D	E	F	G
POV38N	3/8" BSP	350	60/80	-	114	43	98	24	31	Ø12	176

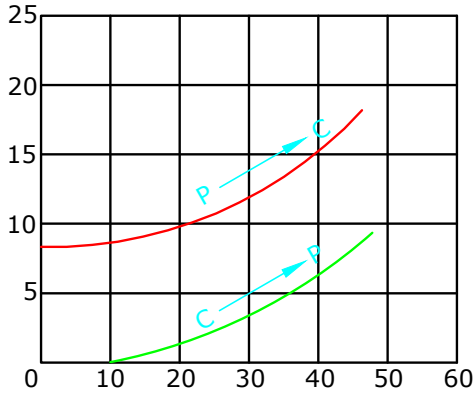

FLOW- Q (L/min)