

## CFS SERİSİ HİDROLİK YÜKSEK BASINÇ YATIK TİP TEK ETKİLİ SİLİNDİRLER

- Dar alanlarda kullanıma uygun hafif ve yatık dizayn.
- Isıl işlemle sertleştirilmiş silindir ve piston
- Pasa karşı dayanıklı ve uzun ömürlü boya
- Tek etkili
- Yay çekmeli
- İlave başlık gerektirmeyen yivli piston başlığı
- Kirliliği önleyen ve silindirin ömrünü arttıran toz keçesi.
- Tüm modellerde HP700N38FN (3/8" NPTF 700 Bar)Yüksek basınç dişi otomatik rekor ve toz kapağı





## CFS SERIES HYDRAULIC HIGH PRESSURE FLAT TYPE SINGLE ACTING CYLINDERS

- Lightweight, flat design for use in confined spaces
- Hardened steel cylinder and piston
- Corrosion resistant & durable painting
- Single-acting
- Spring return
- Grooved piston end requires no saddle
- Piston wiper reduces contamination and extends cylinder life
- HP700N38FN (3/8" NPTF 700 Bar) high pressure coupler and dust cap included on all models






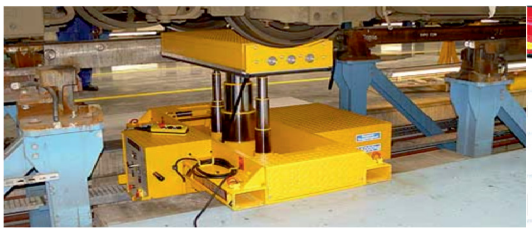





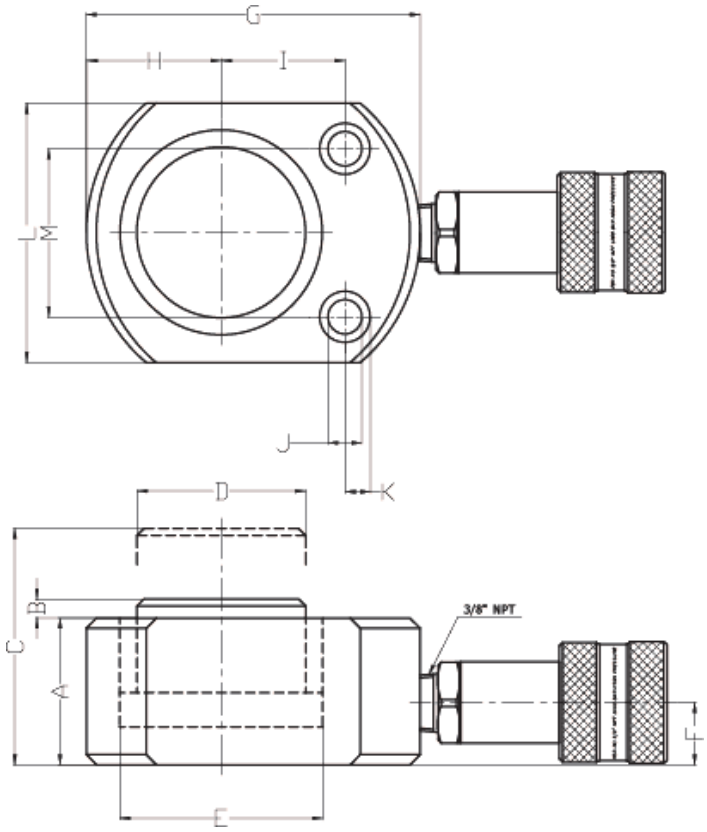


**HP700N38FN**
Tüm silindirler
700 Bar çalışma basınçlı
3/8" NPTF dişi kaplin ile
birlikte verilmektedir.

**HP700N38FN**
3/8" NPTF 700 Bar female
coupler included on all model
cylinders.

## Teknik Özellikler
Technical Specifications

| Kod (Code) | Çalışma Basıncı (Working Pressure) Bar | Kapasite (Capacity) Ton | Strok (Stroke) mm | Ölçüler - mm (Dimensions) - mm | | | | | | | | | | | | | YAĞ KAPASİTESİ (Lt) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | A | B | C | D | E | F | G | H | I | J | K | L | M | |
| CFS5-16 | 700 BAR | 5 TON | 16 | 41 | 1 | 57 | 25 | 30 | 19 | 59 | 21 | 26 | 5.50 | 9 | 42 | 28.50 | 0,010 |
| CFS10-12 | 700 BAR | 10 TON | 12 | 43 | - | 55 | 40 | 45 | 19 | 83 | 30 | 33 | 7 | 11 | 58 | 36.50 | 0,018 |
| CFS20-11 | 700 BAR | 20 TON | 11 | 51 | 1 | 64 | 50 | 60 | 20 | 99 | 40 | 36.50 | 10 | 16 | 77 | 49.50 | 0,030 |
| CFS30-13 | 700 BAR | 30 TON | 13 | 57 | 2 | 72 | 72 | 75 | 19 | 114 | 48 | 43.50 | 10.50 | 16 | 95 | 52 | 0,055 |
| CFS45-16 | 700 BAR | 45 TON | 16 | 65 | 2 | 83 | 70 | 90 | 90 | 140 | 57.50 | 54 | 12 | 19 | 114 | 66.50 | 0,091 |
| CFS75-16 | 700 BAR | 75 TON | 16 | 77 | 2 | 96 | 80 | 115 | 19 | 163 | 69 | 66 | 14 | 22 | 139 | 76 | 0,15 |
| CFS90-16 | 700 BAR | 90 TON | 16 | 83 | 2 | 101 | 90 | 125 | 19 | 178 | 76 | 74 | 14 | 22 | 157 | 76 | 0,18 |
| CFS150-16 | 700 BAR | 150 TON | 16 | 98 | 2 | 116 | 115 | 160 | 23 | 209 | 96 | 82 | 14 | 22 | 191 | 117 | 0,30 |






FER-RO / CFS SERİSİ HİDROLİK YÜKSEK BASINÇ YATIK TİP TEK ETKİLİ SİLİNDİRLER
FER-RO / CFS SERIES HYDRAULIC HIGH PRESSURE FLAT TYPE SINGLE ACTING CYLINDERS