

## BS530/31

| | |
|---|---|
| **BS** | Single subplate |
| **5** | CETOP 5/NG10 |
| ****** | **30** = Connectors A and B side, P and T rear (all 3/4" BSP)<br>**31** = Connectors A and B side, P and T rear (all 3/4" BSP) |
| ***** | **M** = Plastic knob<br>**C** = Grub screw |
| ***** | Setting range<br>**1** = max. 50 bar **(white spring)**<br>**2** = max. 140 bar **(yellow spring)**<br>**3** = max. 350 bar **(green spring)** |
| **00** | No variant |
| **1** | Serial No. |





BS530...




BS531...


**• The minimum permissible setting pressure depending on the spring: see cartridge valve type CMP30...**

## BS530 (CONNECTORS A AND B SIDE, P AND T REAR)

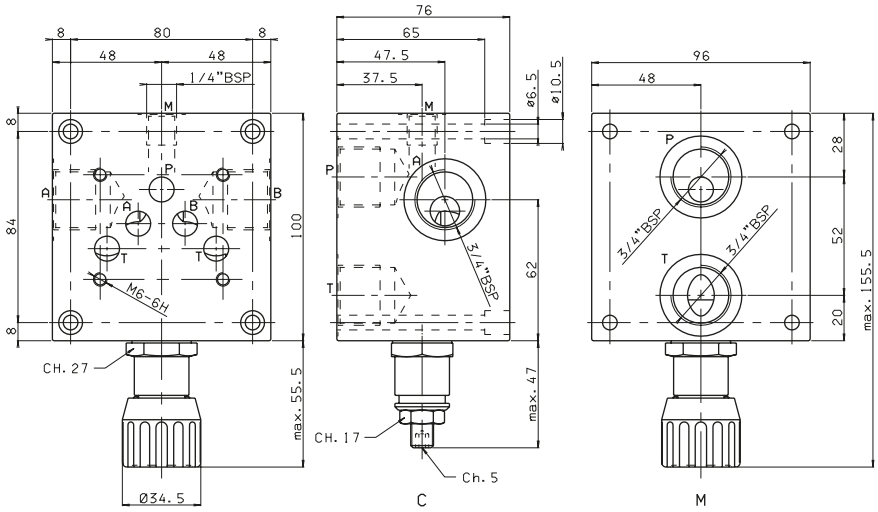


Weight: 5,5 Kg Fixing screws M6x75 ISO 4762

## BS531 (CONNECTORS A AND B SIDE, P AND T SIDE AND REAR)

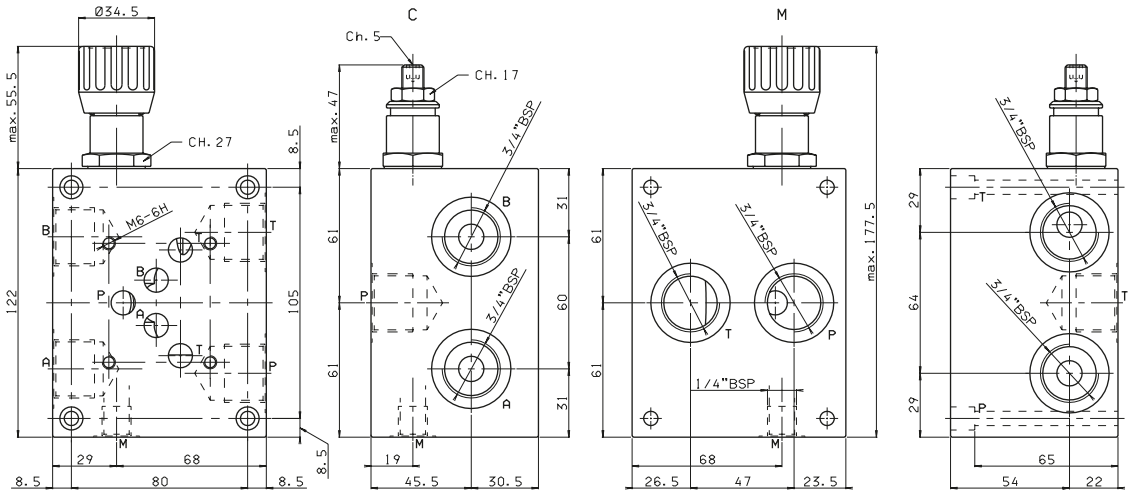


Weight: 6,7 Kg - Fixing screws M6x75 ISO 4762