

# MSV-08-2NCSPL


二位二通电磁阀(双止回型)
2-Way,2-Position
(Bi-directionally Check Type)

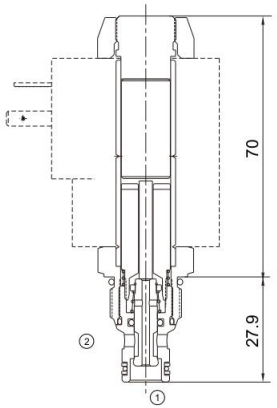


压力-流量性能曲线
Performance Curve Pressure Drop vs.Flow




## 机能符号 Symbol




## 技术参数 Specifications

| | |
|---|---|
| · 工作压力 Operating Pressure | 250BAR |
| · 流量 Flow | 18.9L/min |
| · 内泄漏 Internal Leakage | 1drop/min.max.at operating pressure |
| · 温度 Temperature | -30°C to +120°C(-22°F to+250°F) |
| · 插孔 Cavity | 08-2 see page K-9 |
| · 流体 Fluids | Mineral-based fluids with viscosities of 7.4 to 420 cSt. |


## 产品特性 Features

· 硬化处理,零件耐久性强
Hardened,precision ground parts for durability
· 工业通用插孔
Industry common cavity
· 高效能的电磁铁结构
Efficient wet-armature construction
· 可持续工作的电磁铁
Continuous-duty solenoid
· 紧凑的结构
Compact size

## 工作 Operation

当电磁阀不通电时,此阀截止油液双向流动;
当电磁阀通电时,阀芯打开,允许油液从②流向①或从①流向②流动
When de-energized , the valve blocks flow in both directions.
When energized, the spool opens to allow oil fluid flow from port ②to port① or from port① to port② .

## 安装尺寸 INSTALLATION DIMENSIONS

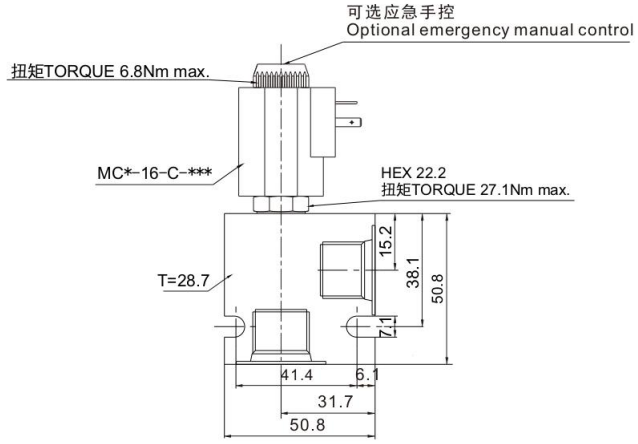


E

## 订购型号 Order Type

MSV-08-2NCSPL – * – * – * * * – * *

I II III IV V VI VII

Ⅰ. 手控应急 Manual Emergency
空白=无手控应急 Not Manual
M=手控应急 Manual Emergency

Ⅱ. 油封 Seal-Kits
N=丁腈橡胶 Buna N
V=氟橡胶 Viton

Ⅲ. 电压 Voltage
12=12V
24=24V
110V=110V
220V=220V

Ⅳ. 线圈连接 Coil Connection
A=安普插头 Amp Plug
B=插片 Double Spade
D=双线引出 Double Lead
S=单线引出 Single Lead
H=DIN43650

Ⅴ. 电流类型 Current Type
D=直流电 Direct current
A=交流电 Alternating current

Ⅵ. 阀块材质 BODY MATERIAL
A=6061-T6铝
耐压强度207Bar
6061-T6 aluminum
alloy rated at 207Bar
S=钢材 耐压强度350Bar
steel rated at 350Bar

Ⅶ. 阀块油口 BODY PORTING
4T=SAE 4T
8T=SAE 8T
3G=G3/8
3N=NPT3/8
其他螺纹油口是可选择的
Other porting is available