

BV2FBAWMN SERİSİ SU VE HAVA 2 YOLLU TAM GEÇİŞLİ MADENCİLİK KÜRESEL VANALARI (BSP – Rd)

BV2FBAWMN Serisi Su ve Hava 2 Yollu Tam Geçişli Madencilik Küresel Vanalar, akışkanın açma ve kısılmasında kullanılırlar. Kolayca açılıp kapanabilmeleri akışkan geçişinin rahat olmasını sağlar. Volumetrik yapılarından dolayı hızlı ve verimli çalışırlar ve akışkanda oluşabilecek kavitasyonları engellerler. İstenildiğinde kare pim üzerindeki kilitleme pulu yardımıyla açık veya kapalı olarak kilitlenebilirler. BV2FBAWMN Serisi Su ve Hava 2 Yollu Tam Geçişli Madencilik Küresel Vanalarda içteki küre malzemesi pirinçten olup, sert krom ile kaplanmıştır. BV2FBAWMN Serisi Su ve Hava 2 Yollu Tam Geçişli Madencilik Küresel Vanalar, madencilik sektöründe su ve hava hatlarında kullanılırlar.

Gövde Malzemesi	Otomat Çeliği
Küre Malzemesi	Sert Krom Kaplı – Pirinç
Vida Ölçüsü	BSP – Rd (Yuvarlak diş)
Küre Yataklaması	Özel sızdırmazlık elemanı
Sızdırmazlık	Nitril O-ring (NBR)
Çalışma Sıcaklığı	-30 °C ile +110 °C
Kaplama	Galvaniz (Chrome III pasivasyon)
Kullanım Alanı	Su ve Hava hatlarının bulunduğu madencilik sektörü uygulamalarında




BV2FBAWMN SERIES 2 WAY FULL BORE MINING BALL VALVES (WATER & AIR APPLICATIONS) (BSP – Rd)

BV2FBAWMN Series 2-Way Full Bore Mining Ball Valves (Water & Air Applications) are used to either shut-off or open of flow passage and their easy operation provides unrestricted flow. Due to their volumetric structure they work rapidly and efficiently, and prevent cavitation.
BV2FBAWMN Series 2-Way Full Bore Mining Ball Valves (Water & Air Applications) can be locked in the open or closed position through locking washer on the circle pin. Internal ball is hard chrome coated brass.
BV2FBAWMN Series 2-Way Full Bore Mining Ball Valves (Water & Air Applications) are suitable for water and air applications in mining sector.

Body Material	Carbon steel
Ball Material	Hard chrome coated brass
Thread Size	BSP – Rd (Round Thread)
Ball Seats	Special sealing equipments
Sealing	Nitrile O-ring (NBR)
Working Temperature	-30 °C and +110 °C
Plating	Zinc Plating (Cr III Passivation)
Applications	Mining sector applications including water and air lines references





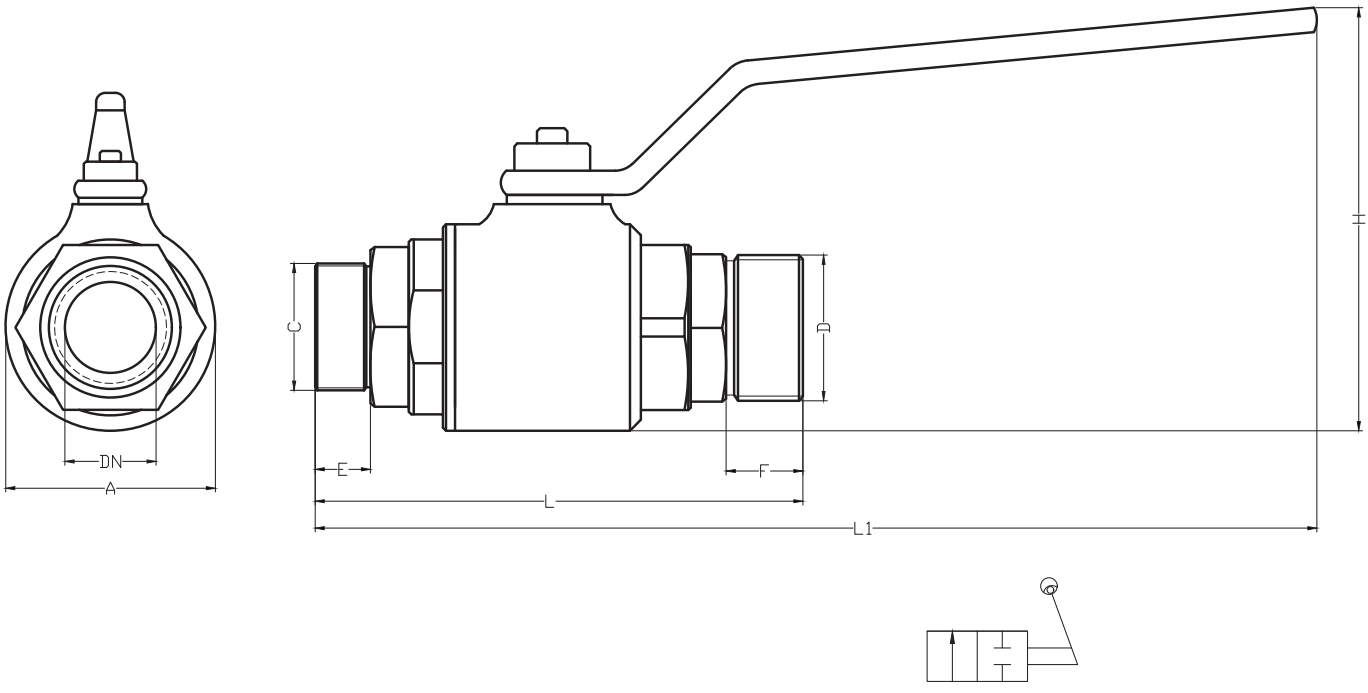

Teknik Özellikler
Technical Specifications

Kod (Code)	Akış Ölçüsü (Diameter) DN	Çalışma Basıncı (Working Pressure) Bar	Ölçüler - mm (Dimensions - mm)								
			A	B	C	D	E	F	G	L	L1
BV2FBAWMNG2RD62DN40N	40	-	-	-	2" BSP	Rd62x1/6"	-	-	-	-	-
BV2FBAWMNG2RD75DN40N	40	180	-	-	2" BSP	Rd75x1/6"	26	39	-	246	374

