

FLOW CONTROL VALVE

(2-Way, Pilot Shifted, Normally Closed, Proportional Throttle)

Ordering Code: **FP-24A-X-Y-Z**

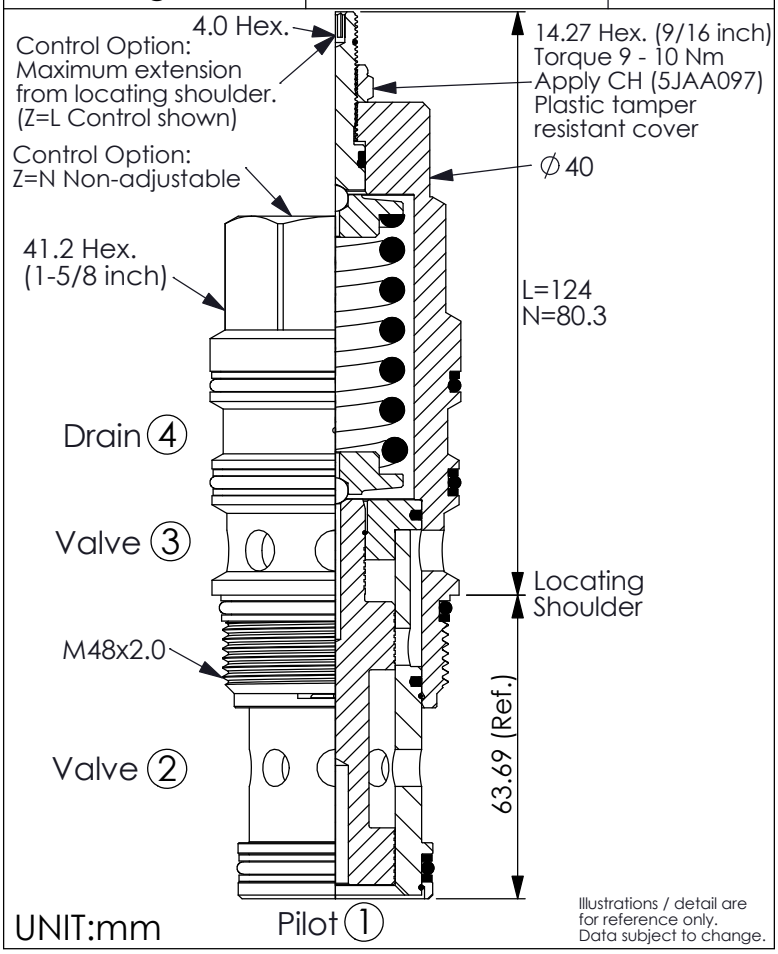


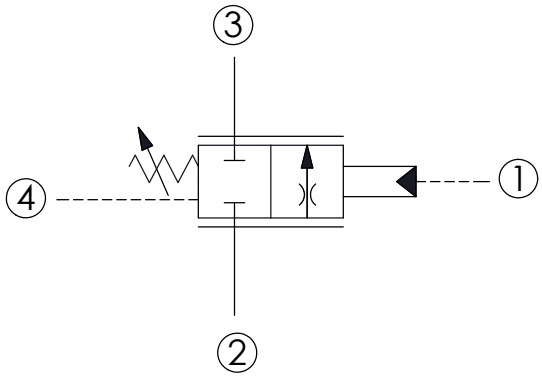



TECHNICAL DATA


Max. Operating pressure:	350	bar
Rated flow:	240	l/min
Cavity-Tooling:	24A-4 (24AB-4)	
Installation torque:	465 - 500	Nm
Weight:	1.51	kg


Ports ① and ④ should be limited to 35 bar

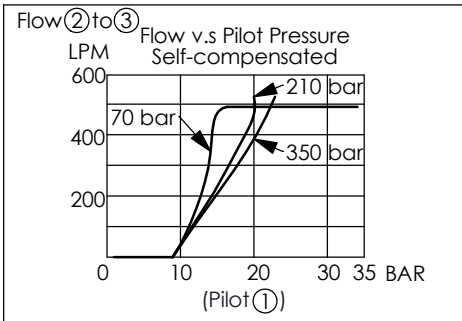

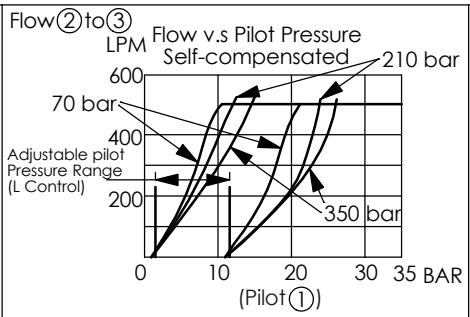

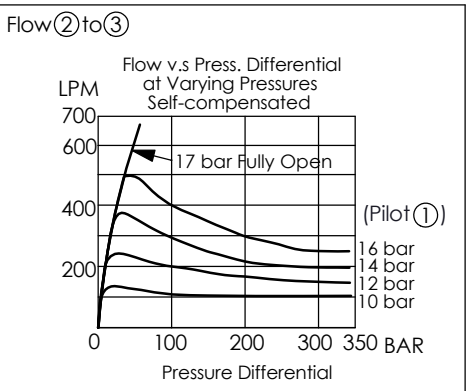

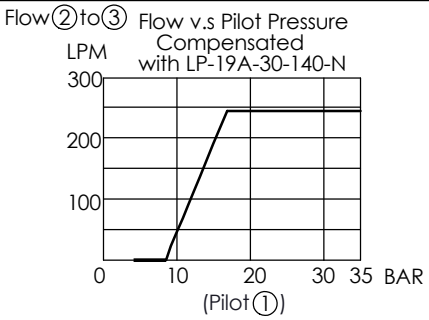

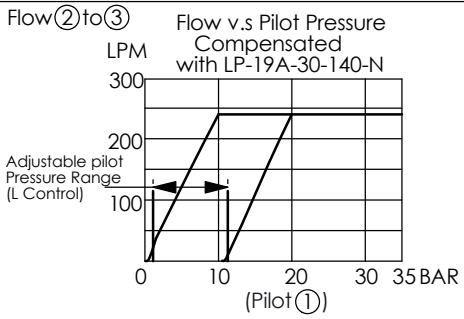

X	OPERATION	
4C	4 Port, Normally Closed	

Y	MAX. FLOW	MIN. PILOT PRESSURE	
B	240 LPM	10 bar	

Z	OPTIONS	
L	Leakproof hex. socket screw. (The adjustment range is 1.4~13 bar) (7 bar Standard Setting)	
N	Non-adjustable (Minimum Pilot Pressure to Operate 10 bar)	