

REDUCING/RELIEVING VALVE
(Direct Acting)


Ordering Code: **PD-19A-X-Y-Z**

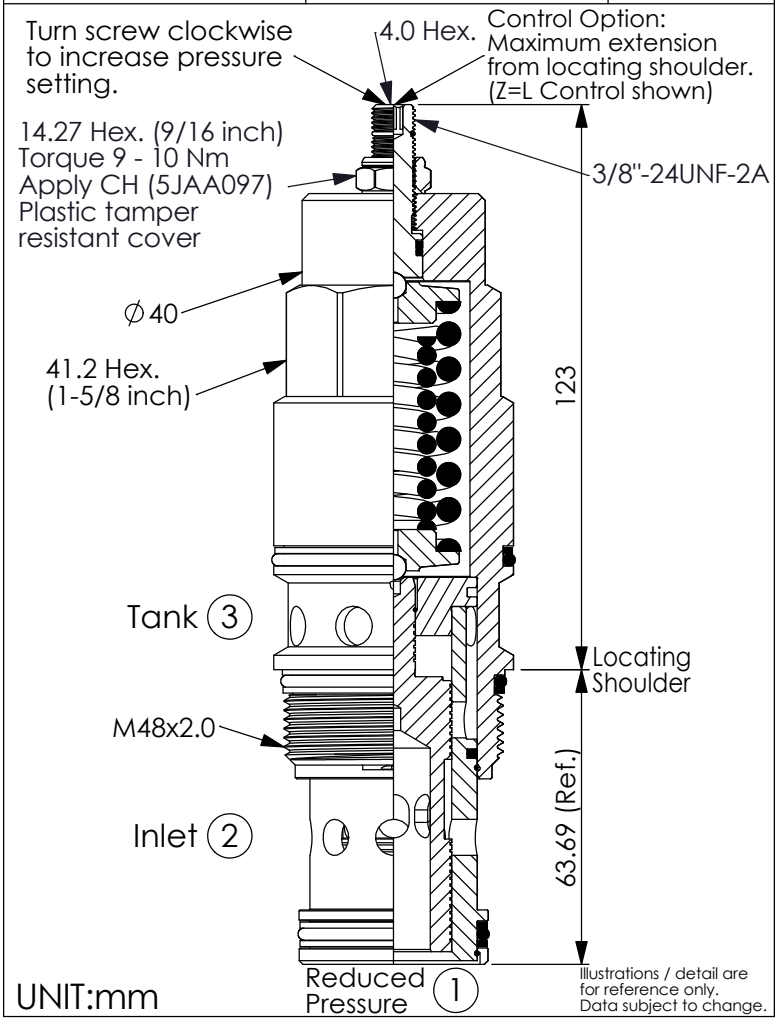

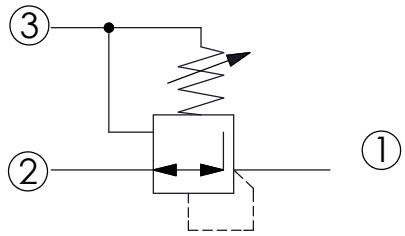

TECHNICAL DATA




Max.Operating pressure:	350	bar
Rated flow:	320	l/min
Cavity-Tooling:	19A-3 (19AB-3)	
Installation torque:	465 - 500	Nm
Weight:	1.541 (**Z**=L)	kg

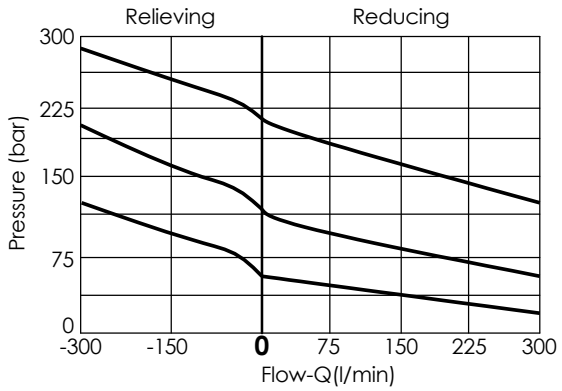

X	OPERATION	
30	Standard Type	

· Maximum Leakage Approximately (80 cc/min./70 bar)

Y	SPRINGS	
	ADJUSTMENT RANGES	
A	50 - 210 bar (70 bar Standard Setting)	
B	20 - 105 bar (35 bar Standard Setting)	
D	14 - 55 bar (28 bar Standard Setting)	
E	7 - 28 bar (14 bar Standard Setting)	
W	76 - 315 bar (76 bar Standard Setting)	

Z	OPTIONS	
L	Leakproof hex. socket screw. 	
LP	Leakproof hex. socket screw. With stainless steel external metal components 	
C	Stainless Steel Tamper Resistant Cover. 	
K	Handknob with Lock Knob. (Order Code: 6ZAK001) 