

COUNTERBALANCE VALVE

Ordering Code:	**CB-10WB-X-Y-Z**

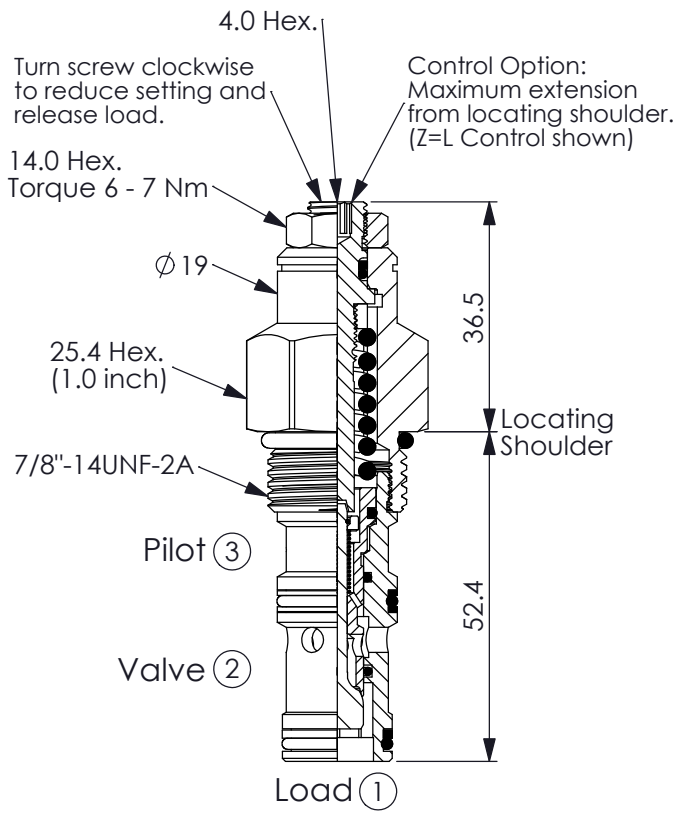

UNIT:mm

Illustrations / detail are for reference only. Data subject to change.

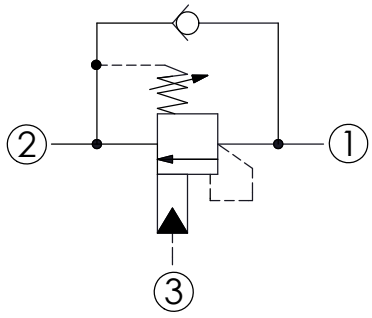


TECHNICAL DATA

Max. Setting:	280	bar
Rated flow:	60	l/min
Cavity-Tooling:	10WB-3	
Installation torque:	35 - 45	Nm
Weight:	0.175 (**Z**=L)	kg

Pressure Setting:

Setting should be 1.3 times maximum load induced pressure.
(We suggest when the Max. setting pressure is 280 bar, the load pressure has to be lower than 215 bar.)

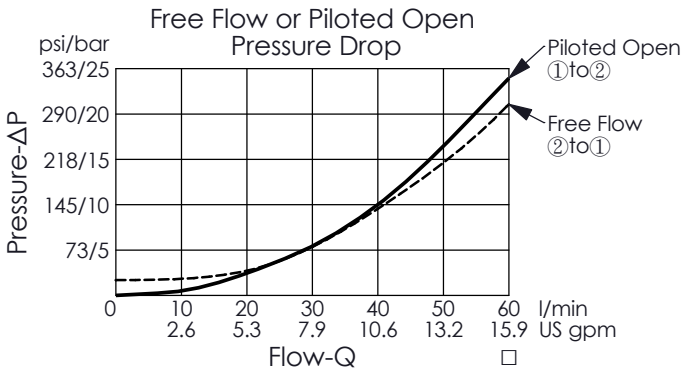

X	PILOT RATIO	
3C	3 : 1 (with sealed pilot)	

Y	SPRINGS	
	ADJUSTMENT RANGES(1.7 bar Cracking Pressure)	
H	70 - 280 bar (210 bar Standard Setting)	
I	25 - 105 bar (70 bar Standard Setting)	
	SPECIAL PURPOSES(0.3 bar Cracking Pressure)	
A	70 - 280 bar (210 bar Standard Setting)	
B	25 - 105 bar (70 bar Standard Setting)	

Z	OPTIONS	
L	Leakproof hex. socket screw. 	
CA	Plastic Tamper Resistant Cover (Order Code:5JAA094) 	