

CYLINDRICAL PLASTIC TANKS P SERIES



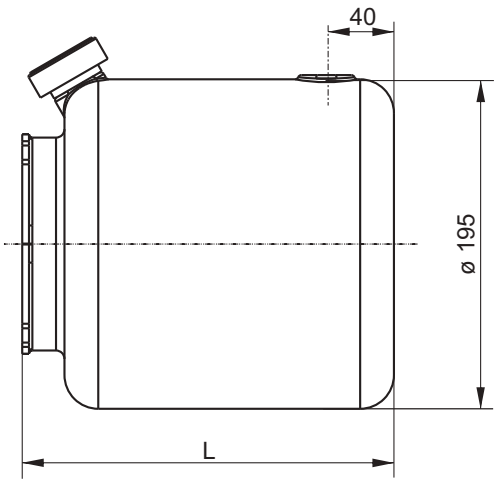

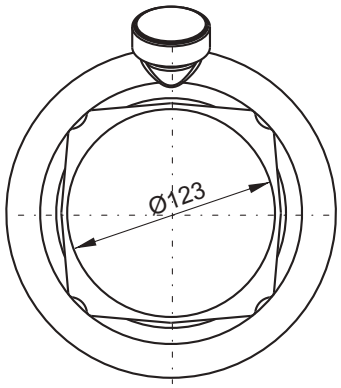


Description	Spare part code	Assembly code	L (mm)	Weight	Actual filling volume lt (gal)	
					Horizontal	Vertical
5 l cylindrical horizontal / vertical mounting	**H60303028**	**5P / 5PV**	219	0,60 Kg	5,0 (1,32)	4,2 (1,11)
7 l cylindrical horizontal / vertical mounting	**H60303030**	**7P / 7PV**	271	0,61 Kg	6,0 (1,59)	5,5 (1,45)
9 l cylindrical horizontal / vertical mounting	**H60303032**	**9P / 9PV**	323	0,76 Kg	7,2 (1,9)0	6,5 (1,72)
11 l cylindrical horizontal / vertical mounting	**H60303035**	**11P / 11PV**	453	1,06 Kg	9,0 (2,38)	10,5 (2,77)

Material	PE-HD neutral / transparent colour (DO NOT EXPOSE TO DIRECT SUNLIGHT)
Fluid	Mineral based oil ISO/DIN 6743/4
Working temperature	-15 / +70°C

Clamping brakets



Clamp code
E60513022

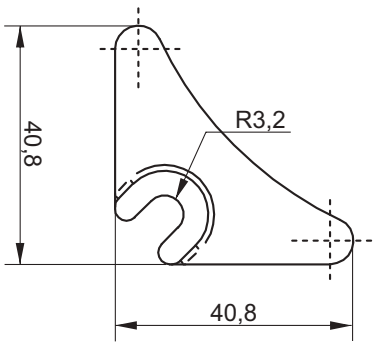

Notes: 4 x E60513022 mounting clamp brakets and a clamp band are required to fix P series cylindrical plastic tanks.

Notes: the piping kit, standard suction strainer and filler/breather are included when specifying the tank in PPC assembly code.
When ordering spare tanks, only the filler/breather C86100001, E60513022 plate and clamp band are included.
Discharge ports are normally moulded blind. On request these tanks are available with an offset collar. Ask for details.