
Grease Positive Displacement Injector Lubrication Systems

SSG-D2 (Grease Cup)


Series	SSG
Type	D2
Distributor	DMT/DTH-series
Voltage (single phase)	24V DC
Consumption Power(W)	93
Output Power (W)	45
Current Consumption(A)	4.0 Max
Output Bore	Ø6
Discharging Pressure in MPa (kgf/cm²)	Maximum10(100)
Discharging Capacity (cc/mim)	Above 20
Float Switch	x(Option)
Pressure Switch	x(Option/External)
Pressure Gauge	o(MPa & kgf/cm²)
Cup Capacity (c.c.)	1000
Accepted Grease(40˚C)	No. 000,No.00,No.0



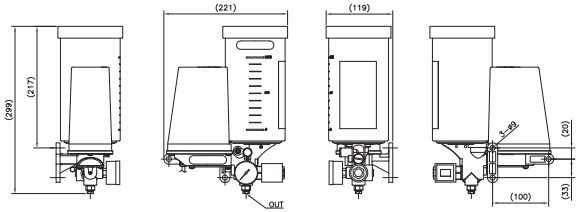

SSG-D2 (Grease Cartridge)

Series	SSG
Type	D2
Distributor	DG-series
Voltage (single phase)	24V DC
Consumption Power(W)	93
Output Power (W)	45
Current Consumption(A)	4.0 Max
Output Bore	Ø6
Discharging Pressure in MPa (kgf/cm²)	Maximum10(100)
Discharging Capacity (cc/mim)	Above 20
Float Switch	x(Option)
Pressure Switch	x(Option/External)
Pressure Gauge	o(MPa & kgf/cm²)
Cup Capacity (c.c.)	700
Accepted Grease(40˚C)	No. 000,No.00,No.0

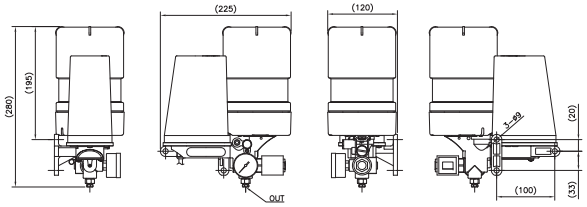




DMT-Series



DMT-0600

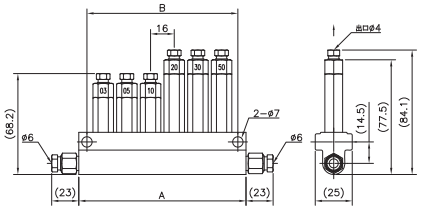


DMT-31-06

Model	Number of Outlet (N)	A (mm)	B (mm)	Output Volume (c.c./stroke)
DMT31-01	1	33	22	0.03
DMT31-02	2	49	38	0.05
DMT31-03	3	65	54	0.1
DMT31-04	4	81	70	0.2
DMT31-05	5	97	86	0.3
DMT31-06	6	113	102	0.5



DM3-0000



DM3-0000-03
DM3-0000-05
DM3-0000-10


DM3-0000-20
DM3-0000-30
DM3-0000-50

Model	Mark	Metered quantity (c.c.)
DM3-0000-03	1	0.03
DM3-0000-05	2	0.05
DM3-0000-10	3	0.1
DM3-0000-20	4	0.2
DM3-0000-30	5	0.3
DM3-0000-50	6	0.5

DTH-Series



DTH-0500



Model	Number of Outlet (N)	A (mm)	B (mm)	Metered quantity (c.c.)
DTH-0200	2	75	39-43	0.3
DTH-0300	3	90	54-58	0.4
DTH-0400	4	105	69-73	0.5
DTH-0500	5	120	84-88	
DTH-0600	6	135	99-103	

Series

1. Dimension is in "mm".
2. Option of the Ø6 outlet is available.

1. Dimension is in "mm".
2. Option of the Ø6 outlet is available.