
MAG Resistance Type Grease Pneumatic Lubricator



MAG-50-0-1-A

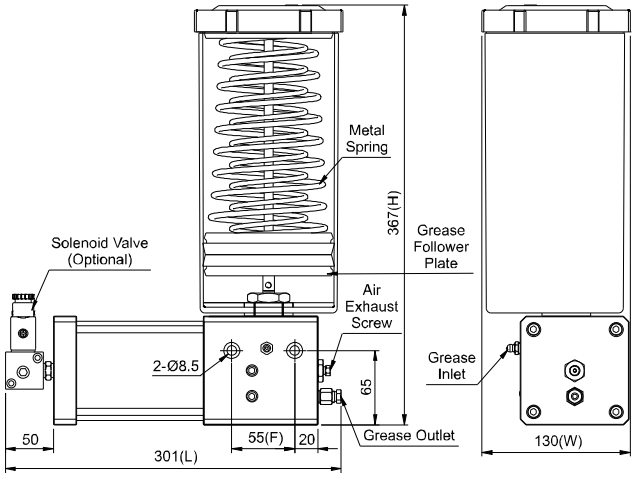

Dimensional Drawing of MAG-50-0-1-A

◆Features

1. The operation and interval time of MAG are controlled pneumatically.
2. A solenoid valve can be added as a switch for the pneumatic pressure supply to control the ON/OFF switch of MAG upon request.
3. The operation time (ON) should be set up as 25 seconds, and the interval time (OFF) should be set up as 5 seconds to complete one operation cycle.
4. MAG requires 4-8kgf/cm² pneumatic pressure supply to have the corresponding 117-290kgf/cm² operating pressure. It can meet different pressure requirements and applications.
5. Please refill grease from the grease inlet to prevent air and impurities from entering the grease tank.

◆Technical Data & Dimensional Data

Effective Capacity	Length (mm)	Width (mm)	Height (mm)	Fixed Hole Distance (mm)	Operation Time	Interval Time	Discharge Volume	Grease Inlet	Air Inlet	Discharge Bore	Suitable Viscosity	N.W. (kg)
1500cc	301	130	367	55	Over 25 sec.	Over 5 sec.	About 2.5 cc/stroke	PT1/8 Grease Nipple	Ø8 Ø10	Ø4 Ø6 Ø8 Ø10	Grease NLGI 000-2	6.53

◆Pressure Chart (Reference Value)

Pneumatic Pressure (kgf/cm²)	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
Operating Pressure (kgf/cm²)	117	140	160	181	201	222	242	265	290

◆Order Code

MAG — 50 — 0 — 1 — 0 — ※

Effective Capacity	
50	1500cc

Air Inlet	
0	Ø8
1	Ø10

Discharge Bore	
0	Ø4 xPT1/4
1	Ø6 xPT1/4
2	Ø8 xPT1/4
3	Ø10xPT1/4

Solenoid Valve	
0	Without a Solenoid Valve
A	With a Solenoid Valve, AC110V
C	With a Solenoid Valve, AC220V
K	With a Solenoid Valve, DC24V

Special Request	
G	Add a Pressure Gauge
RC	Add a NC Contact Magnetic Level Switch
RO	Add a NO Contact Magnetic Level Switch

◆Related Products



P. 85 P. 81 P. 82 P. 83 P. 111 P. 113 P. 131 P. 126 P. 125