




| Rev. | Modify | Date | Firma | Approved |
|---|---|---|---|---|
| | | | | |

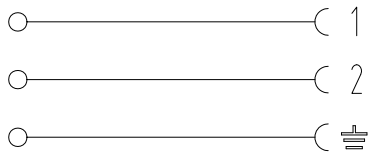







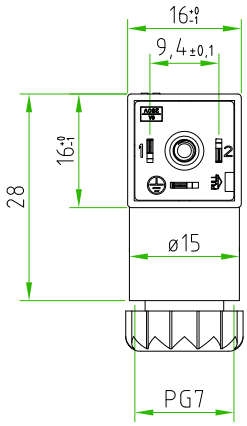





CONTACTS WITHOUT SOLDER ZONE



SPRING CONTACTS




| CONNECTOR FEATURES | | |
|---|---|---|
| | PRODUCT TYPE | SQUARE MICRO INDUSTRIAL STANDARD FORM C FIELD ATTACHABLE. |
| | HOUSING MATERIAL/COLOUR | PA66 /BLACK |
| | PRESS-CABLE MATERIAL/COLOUR | PA66 /BLACK |
| | INTERNAL CORE MATERIAL/COLOUR | PA66 /BLACK |
| | HEIGHT HOUSING | 26mm |
| | CONTACTS SPACING | 9,4mm |
| | CONTACTS TYPE | SCREW CONTACTS(with protection plate) |
| | NUMBER OF POLES | 2POLES+EARTH |
| | EARTH POSITIONING | H.6 (TURNABLE) |
| | CABLE EXIT | PG7 |
| | SUITABLE CABLE | FROM ø4mm TO ø6mm |
| | MAX.CONDUCTOR SIZE | 0,75mm² |
| | PROTECTION CLASS | IP67 |
| | CIRCUIT TYPE | WITHOUT ELECTRONIC |
| | RATED VOLTAGE | 250V AC / 300V DC |
| | CONNECTOR TEMPERATURE RANGE | from -40°C to +90°C |
| | GASKET TYPE | PROFILED NBR |
| | FIXING SCREW | M3X0,5 L=28mm |
| | CONNECTOR WITH H.T.P. LOGO | |

| CUSTOMER APPROVAL | |
|---|---|
| SIGNATURE | DATE |
| | |
| PLEASE SIGN AND RETURN | |

| Rev. | Modify | Date | Signed | Approved |
|---|---|---|---|---|
| | | | | |

| Designer | SUGLIANI R. | Date | 2017-03-13 | Tollerance ±0,3 | Units: mm | Series INDUSTRIAL STANDARD (form C) | Drawing n. 1/1 |
|---|---|---|---|---|---|---|---|
| Approved | CIMMINO L. | Date | 2017-03-13 | Scale 1:1 | Size: A4 | Customer code: | |

A4

HTP™ High Tech Products S.R.L.

DESCRIPTION

SQUARE MICRO CONNECTOR INDUSTRIAL STANDARD (form C),FIELD ATTACHABLE, 2P.+PE, WITHOUT ELECTRONIC, 250V AC/300V DC, BLACK HOUSING, PG7. CONNECTOR WITH H.T.P. LOGO.

H.T.P.PART NUMBER

P2NZ2000

H.T.P. High Tech Products S.R.L. Via Lesina,45 -24030- Brembate di Sopra (Bg) - ITALY Phone:+39.035692509 Fax:+39.035203291 E-mail: info@webhtp.eu Web: http://www.webhtp.eu/

ALL RIGHTS ARE RESERVED.