

RETURN LINE FILTER MODULAR MANIFOLD



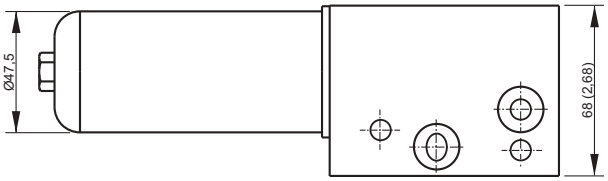


Dimensions in mm (inches)

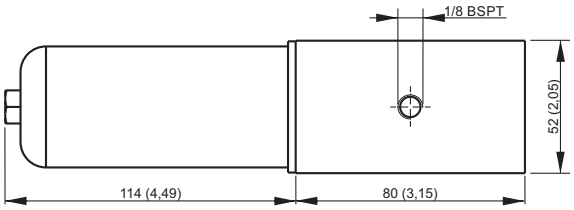

Main features

Open by-pass valve press.	2 bar
Max flow	15 l/min
Filtration grade	15 µ
Fluid temperature	-30 ÷ + 80 °C
Weight	0,87 kg
Fixing bolts	2 M8 bolts steel class 8.8 or above

Hydraulic scheme



Note: standard code does not include the MIR40 pressure gauge or F4 pressure switch


Spare part code

E60403020	**Modular manifold with return filter on T**
FO201385	**15 micron replacement cartridge part number**

Note: Recommended tightening torque for M8 bolts: 16 Nm.
Attention! Do not use tie-rods less than 8.8.
Recommended tightening torque for spin on cartridge: 10Nm
This filter cannot be used on U4 and UR manifolds, since both these central manifolds outlet ports are pressurized. You may choose C34200001 in-tank return filter.

OPTIONS


Pressure gauge for return filter manifold

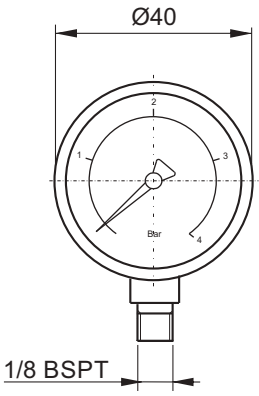

Weight: 0,1 Kg

Spare part code
MIR4004

Pressure switch for return filter manifold

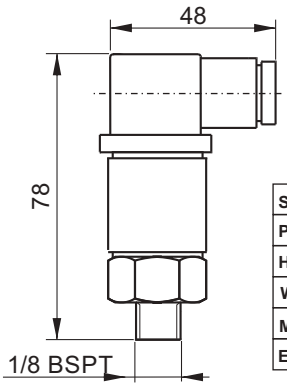

Setting range	0,2 ÷ 2,5 bar
Protection degree	IP 65
Hysteresis	10 ÷ 15 %
Weight	0,05 Kg
Max load	0,5 A a 250 VAC
Electric switch	NO/NC

Spare part code
F4R0M3

Mounting example

