
Air treatment:
filter + reducer + lubricator G 1/4

series UZ


TECHNICAL DATA

Maximum pressure	16 bar
Working temperature	0 ÷ +50 °C (–10° C with dry air)
Fluid	Compressed air
Port size	G 1/4
Pressure gauge port size	G 1/8
Flow rate at 6 bar ΔP=1 bar	220 Nl/min
Wall clamping screws	M4x50





DIMENSIONS AND WEIGHT - F+R+L

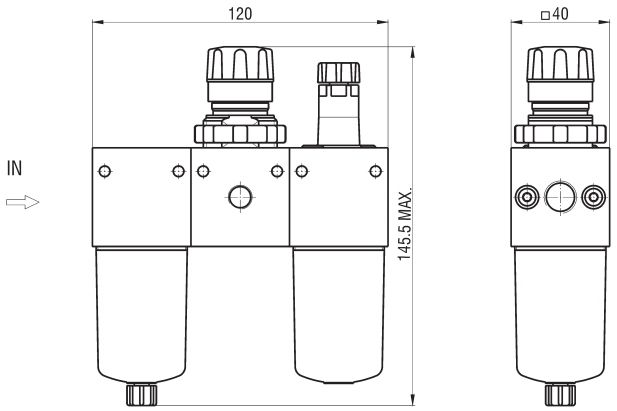

WEIGHT 610 g

ORDER KEY

UZF ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

- Series
- Size
- Adjusting range
- Degree of filtration
- Lubrication
- Bowl
- Condensate drainage system
- ATEX

SIZE

4 G 1/4

DEGREE OF FILTRATION

/5 5 µm
/20 20 µm
/40 40 µm

ADJUSTING RAGE

RR3 0,2 ÷ 2 bar
RR5 0,4 ÷ 4 bar
RR7 0,8 ÷ 9 bar
RR12 1,5 ÷ 12 bar

LUBRICATION

L Oil mist (standard)
LM Micro-oil mist

BOWL

Trasparent
/PM Metallic protection
/TM Metallic

CONDENSATE DRAINAGE SYSTEM

Manual
/SS Semi-automatic

ATEX

/EX Consistent with the ATEX directive
Ex II 2G Ex h IIC T5 Gb -10°C≤Ta≤50°C
II 2D Ex h IIIC T100 °C Db X

P.S.: Filters + reducers + lubricators can be supplied without the relieving seal on request; the adjusting range becomes “R” (rather than “RR”)