

FLOW CONTROL VALVE
(Electro-Proportional, Normally Closed Throttle)

Ordering Code:	**PFC-17E-X-Y-Z**

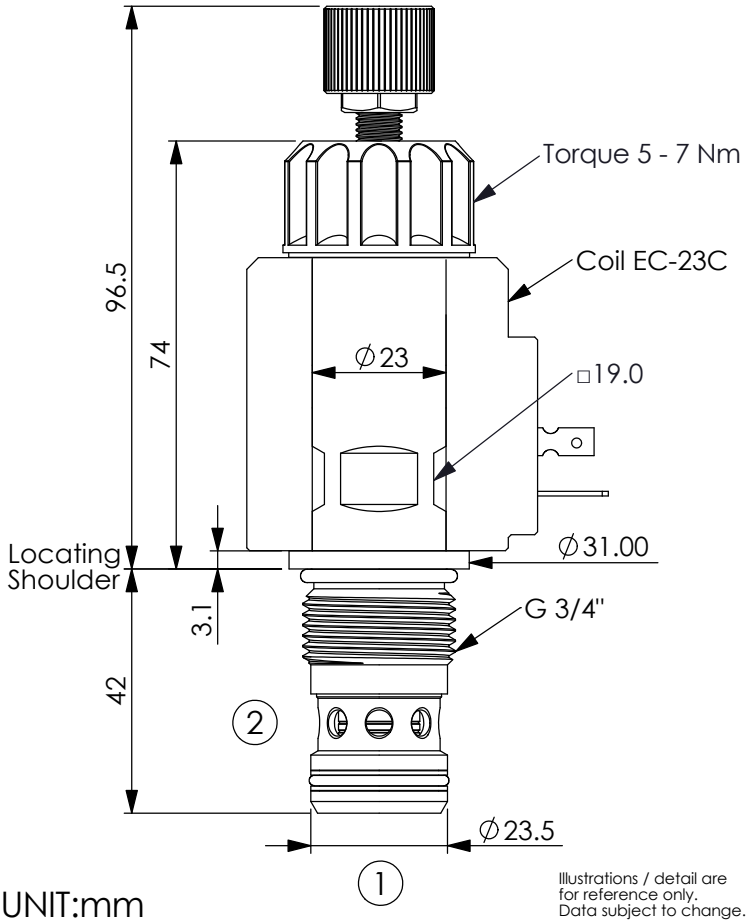


UNIT:mm

Illustrations / detail are for reference only.
Data subject to change.



TECHNICAL DATA

Max.Operating pressure: 350		bar
Rated flow:	70	l/min
Cavity-Tooling:	17E-2	
Installation torque:	45 - 55	Nm
Weight:(with Coil)	0.70	kg
(without Coil)	0.35	kg

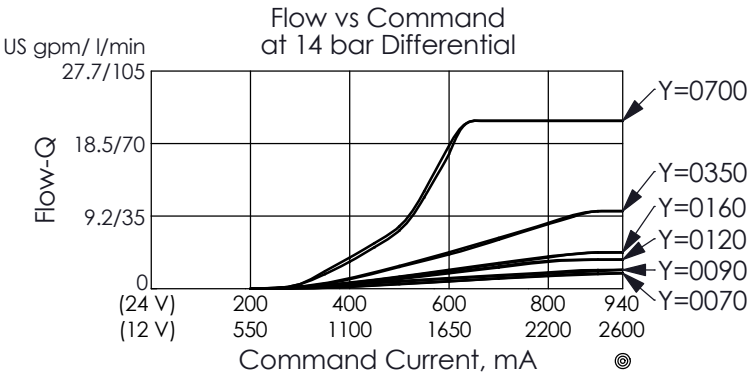


X	OPERATION	
2G	2 Ports、17 Watt. Coil ∅ 23 mm tube	

NOTE:Coil must be ordered separately. Use 12V DC or 24V DC (Series EC-23C) coils only.

Y	FLOW	
	Max. Flow (Port ① to Port ②)	
0070	7 LPM	
0090	9 LPM	
0120	12 LPM	
0160	16 LPM	
0350	35 LPM	
0700	70 LPM	

· If port ① has sudden high flow, for example: When parallel using many valves and high flow of pump, please select PFC17E2G0680-Z-9. Please feel free to contact Winner's sales department.

Z	OPTIONS		
N	Non-adjustable		
M	Manual Override (Standard)		
P	Push Style Manual Override		