



FC3W SERİSİ HAT TİPİ BASINÇ DUYARLI 3 YOLLU ÇEKSİZ HIZ AYAR VALFLERİ

FC3W serisi hat tipi basınç duyarlı 3 yollu çeksiz hız ayar valfleri E portundan giren akışkanın hızını hız ayar valfi sayesinde ayarlayarak P portuna gönderilmesini sağlar sistemde oluşan basınç ve debi değişimlerini içerisinde bulunan hidrostatik denge pistonu sayesinde S portundan boşaltarak P portunda akışkanın basıncını ve debisini stabilize eder.

Malzeme	Alüminyum
Vida Ölçüsü	BSP (İsteğe Bağlı: NPT, Metrik)
Sızdırmazlık	Nitril O-ring (NBR)
Çalışma Sıcaklığı	-30 °C ile +110 °C
Kullanım Alanı	Genel hidrolik uygulamaları




FC3W SERIES LINE TYPE PRESSURE SENSITIVE 3-WAY FLOW CONTROL VALVES (WITHOUT CHECK)


FC3W series line type pressure sensitive 3-way flow control valves without check adjust the speed of the fluid entering port E through the flow control valve and allow it to be sent to port P by discharging the pressure and flow rates formed in the system from port S tanks to the hydrostatic balance piston located in it and stabilizing the pressure and flow of the fluid ın port P.


Material	Aluminium
Thread Size	BSP (Upon Request: NPT, Metric)
Sealing	Nitrile O-ring (NBR)
Working Temperature	-30 °C and +110 °C
Applications	General hydraulic applications





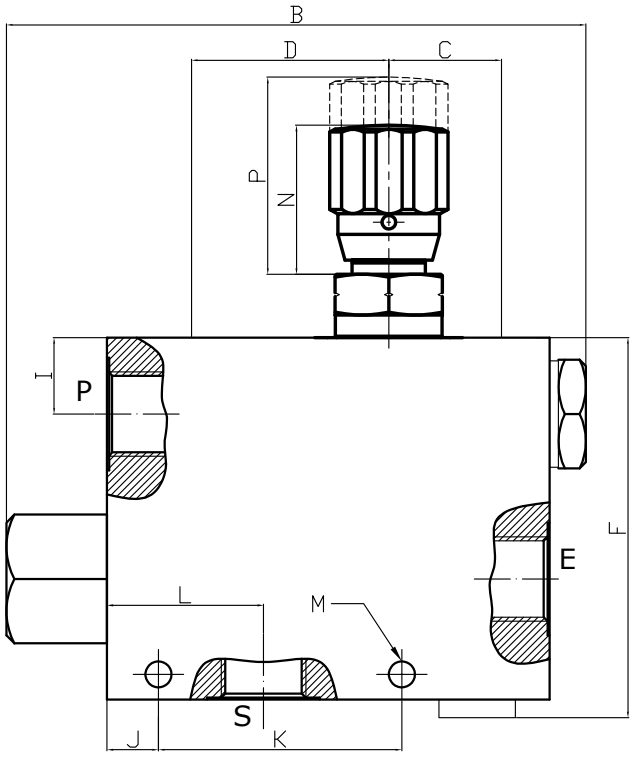

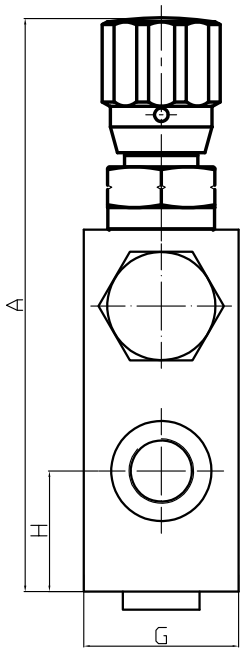




Teknik Özellikler
Technical Specifications

Kod (Code)	Vida Ölçücü (Thread Size) P-S-E	Çalışma Basıncı (Working Pressure) Bar	E - PORT Max. Yağ Akışı (Max. Flow) Lt/Min	P - PORT Max. Yağ Akışı (Max. Flow) Lt/Min	Ölçüler - mm (Dimensions - mm)												
					A Max	B	C	D	F	G	H	J	K	L	M	N	P
FC3WPSG38N	3/8" BSP	210	55	30	166	151	40	70	93	38.50	29	12.75	57.25	39	Ø6.50	44	60.50
FC3WPSG12N	1/2" BSP	210	90	55	166	151	40	70	93	38.50	29	12.75	57.25	39	Ø6.50	44	60.50
FC3WPSG34N	3/4" BSP	210	120	100	-	-	-	-	-	-	-	-	-	-	-	-	-

3/8"

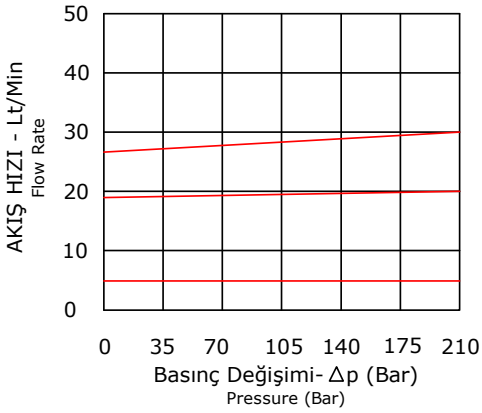

1/2"

