

REDUCING VALVE
(Pilot Operated Reducing)

Ordering Code:	**PB-19A-X-Y-Z**

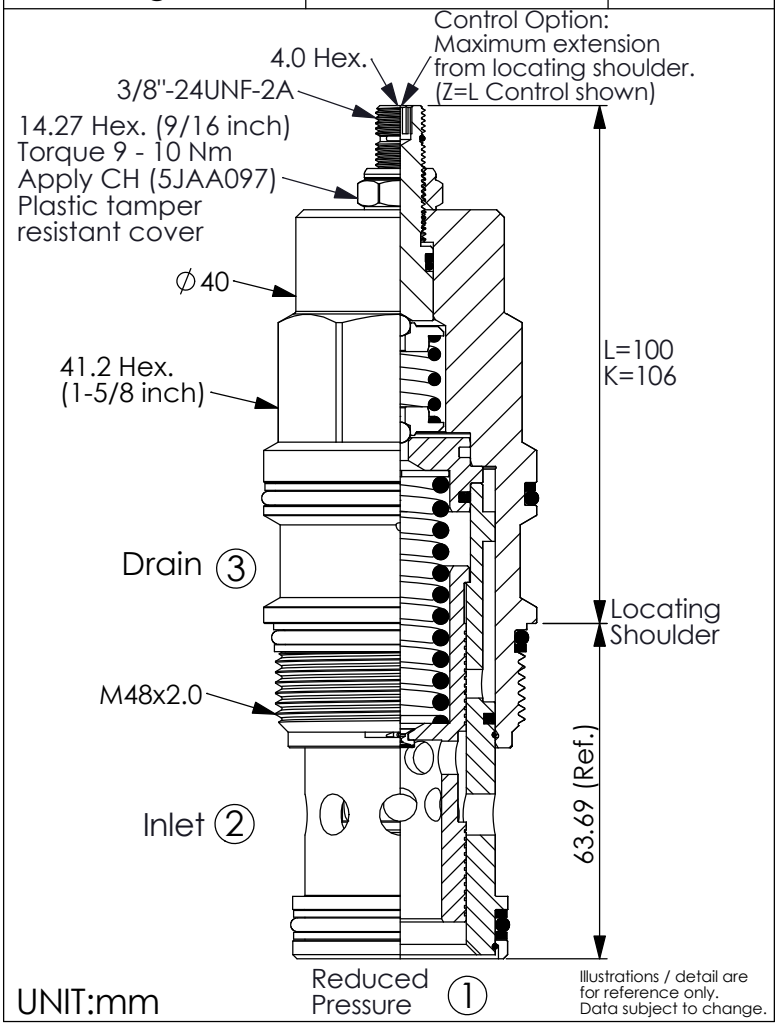




TECHNICAL DATA

Max.Operating pressure:	350	bar
Rated flow:	320	l/min
Cavity-Tooling:	19A-3 (19AB-3)	
Installation torque:	465 - 500	Nm
Weight:	1.31 (**Z**=L)	kg


Control Pilot Flow (0.25 - 0.33 L/min.)

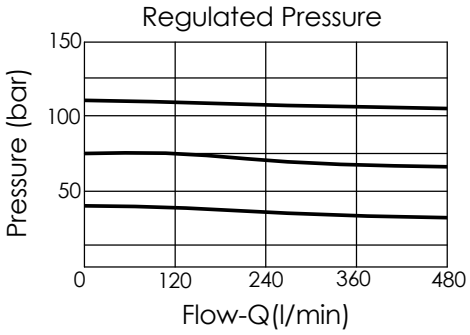

X	OPERATION	
30	Standard Type	
35	Impact Resistant Type (Without Filter)	

Y	SPRINGS	
	ADJUSTMENT RANGES (Recommended Differential Pressure)	
A	7 - 210 bar (14 bar Standard Setting) test at 350 bar inlet pressure	
B	3.5 - 105 bar (14 bar Standard Setting) Maximum Differential=210 bar	
C	10.5 - 420 bar (14 bar Standard Setting) test at 420 bar inlet pressure	
D	1.7 - 55 bar (14 bar Standard Setting) Maximum Differential=140 bar	
E	1.7 - 28 bar (14 bar Standard Setting) Maximum Differential=140 bar	
H	2 - 210 bar (14 bar Standard Setting) test at 210 bar inlet pressure	
J	1.7 - 105 bar (14 bar Standard Setting) Maximum Differential=140 bar	
N	4 - 55 bar (14 bar Standard Setting) Maximum Differential=210 bar	
Q	4 - 28 bar (14 bar Standard Setting) Maximum Differential=210 bar	
W	10.5 - 315 bar (14 bar Standard Setting) test at 350 bar inlet pressure	

Any technical questions, please feel free to consult with our sales dept.

Z	OPTIONS		
L	Leakproof hex. socket screw.		
LP	Leakproof hex. socket screw. With stainless steel external metal components		
K	Handknob with Lock Knob. (Order Code: 6ZAK001)	