

FLOW CONTROL VALVE
(Fully Adjustable Needle with Standard Orifice)

Ordering Code:	**NV-10W-X-Y-Z**

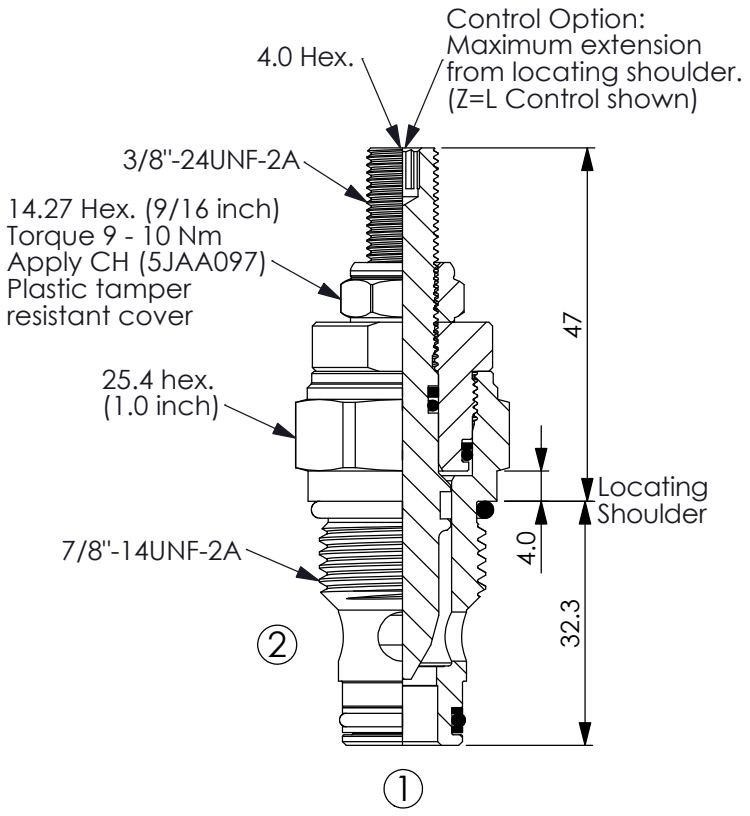

UNIT:mm


Illustrations / detail are for reference only. Data subject to change.



TECHNICAL DATA




Max. operating pressure:	350	bar
	(Refer To Performance Chart)	
Rated Flow:	50	l/min
	(Refer To Performance Chart)	
Cavity-Tooling:	10W-2	
Installation torque:	35 - 45	Nm
Weight:	0.15 (**Z**=L)	kg

Performance Chart

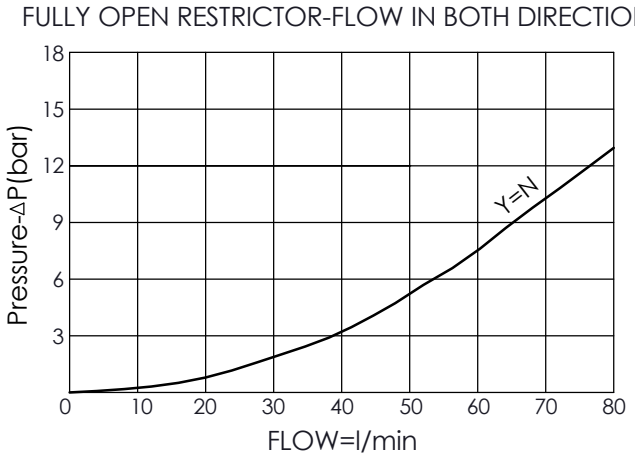

X	OPERATION
20	Needle Valve

Y	MAXIMUM NOMINAL ORIFICE
N	∅ 7.2 mm

Z	OPTIONS	
L	Leakproof hex. socket screw.	
K	Handknob with Lock Knob. (Order Code: 6ZAK001)	
E	Handknob and locknut.	
B	Handknob and aluminum locknut.	
T	Three-winged Handknob Kit.	