
DIRECTIONAL VALVE

(3-Way, 2-Position Direct Acting, Port ③ to Port ④, Shift Port ② to Port ③)


Ordering Code:	**DD-21A-X-Y-Z**

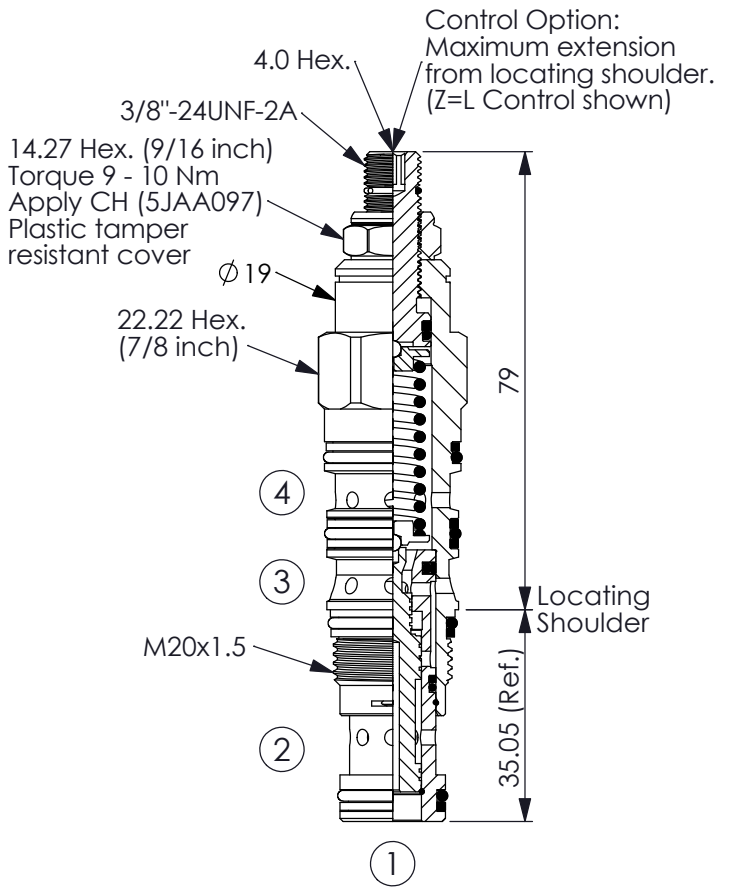

UNIT:mm

Illustrations / detail are for reference only. Data subject to change.


TRANSITION:

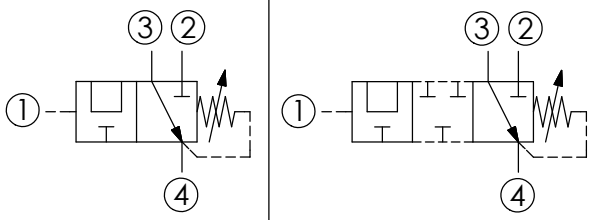

TECHNICAL DATA

Max. pressure:	350	bar
Rated flow:	28	l/min
Cavity-Tooling:	21A-4	
Installation torque:	40 - 50	Nm
Weight:	0.18 (**Z**=L)	kg


- Maximum pressure at port ③ recommend be limited to 210 bar, any technical questions, please feel free to consult with our sales dept.
- Pressure at port ④ is directly additive to the setting of the valve.

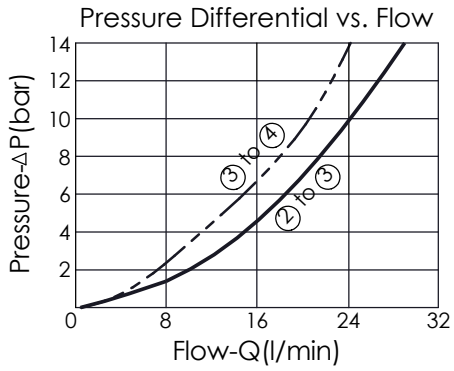

X	OPERATION
4R	Port ③ to Port ④; Port ① pilot to shift, Port ② to Port ③

- Maximum Leakage Approximately (25 cc/min./70 bar)

Y	PRESSURE SETTING
E	1.7 - 28 bar (14 bar Standard Setting)
N	4 - 55 bar (25 bar Standard Setting)
S	1.7 - 14 bar (14 bar Standard Setting)

Z	OPTIONS	
L	Leakproof hex. socket screw.	
C	Stainless Steel Tamper Resistant Cover.	
K	Handknob with Lock Knob. (Order Code: 6ZAK001)	