
D-Hydro

YOUR HOSE ASSEMBLY
MACHINE SUPPLIER

# SM 25 HP/AP

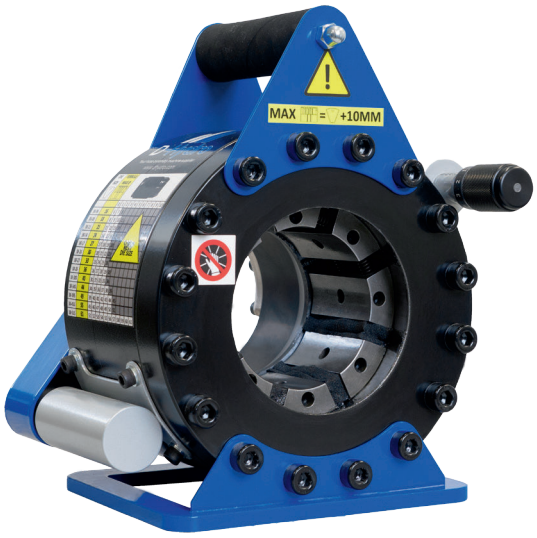


## Technical specifications

| | |
|---|---|
| **Max hose size** | 1" 4 SH, 1 1/2" |
| **Crimping force (kN):** | 1200 |
| **Max ferrule diameter (mm):** | 61 |
| **Max opening diameter (mm):** | die diameter + 23 |
| **Actuation / HP model:** | Two-speed hand pump |
| **Actuation / AP model:** | Air pressure |
| **Control:** | Micrometer with led |
| **Master dies opening / Length (mm):** | 98/64,5 |
| **Crimping range (mm):** | 6 – 61 |
| **Crimping unit weight (kg):** | 25 |
| **Crimping unit dimensions (LxWxH mm)** | 230 x 200 x 275 |

## Die set options

| | Range (mm) | Length |
|---|---|---|
| **38-06** | 6-16 | 45 |
| **38-08** | 8–18 | 45 |
| **38-11** | 11-21 | 45 |
| **38-14** | 14-24 | 45 |
| **38-17** | 17-27 | 45 |
| **38-20** | 20-30 | 55 |
| **38-23** | 23-33 | 55 |
| **38-26** | 26-36 | 55 |
| **38-30S** | 30-40 | 60 |
| **38-34S** | 34-44 | 60 |
| **38-39S** | 39-49 | 65 |
| **38-45S** | 45-55 | 65 |
| **38-51S*** | 51-61 | 65 |

* Max. ferrule diameter before crimping 61 mm

## Hand pump / Air pump







## WWW.DHYDRO.COM

Salpakatu 14 - 80100 Joensuu - Finland - info@dhydro.com

4/2023 Drukarnia Studio-eM