

CRAS SERİSİ HİDROLİK YÜKSEK BASINÇ TEK ETKİLİ ALÜMİNYUM SİLİNDİRLER

- CRAS Serisi tek etkili alüminyum silindirler hafif yapılarından dolayı kolaylıkla taşınma fonksiyonuna sahiptirler.
- Eksantrik yükü absorbe ederek etkisini düşüren ve aşınmayı azaltan destek keçesi
- Silindirin ömrünü uzatan uzun ömürlü ve pasa karşı dayanıklı sert kaplama yüzey.
- Çelik taban
- Tek etkili
- Yay çekmeli
- Takılıp çıkarılabilen sertleştirilmiş yivli başlık
- Kirliliği önleyen ve silindirin ömrünü arttıran toz keçesi.
- Tüm modellerde HP700N38FN (3/8" NPTF 700 Bar) Yüksek basınç dişi otomatik rekor ve toz kapağı,




CRAS SERIES HYDRAULIC HIGH PRESSURE SINGLE ACTING ALUMINIUM CYLINDERS

- CRAS Series single acting aluminum cylinders has lightweight design to provide easy to carry function.
- The exclusive Guide Ring design absorbs eccentric loading and reduces wear.
- Corrosion resistant & durable hard-coat finish extends cylinder life
- Easy to carry handles
- Steel base plate
- Single-acting
- Spring return
- Hardened removable grooved saddle
- Piston wiper reduces contamination and extends cylinder life
- HP700N38FN (3/8" NPTF 700 Bar) high pressure coupler and dust cap included on all models





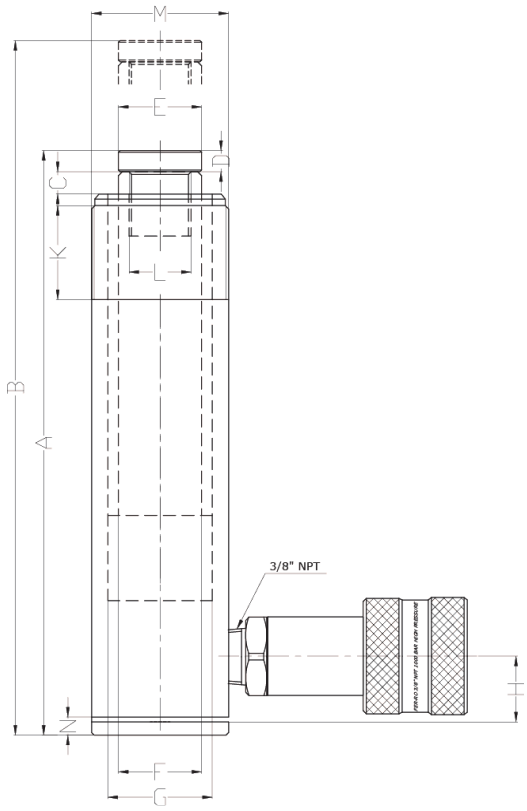

Teknik Özellikler
Technical Specifications

Kod (Code)	Çalışma Basıncı (Working Pressure) Bar	TON (Ton)	Strok (Stroke)	Ölçüler - mm / (Dimensions) - mm																Yağ Kapasitesi (Lt)
				A	B	C	D	E	F	G	H	I	J	K	L	M	N	P	
CRAS25-55	700	25 TON	55	180	235	1	10	49,50	55	65	21.50	66	M12	-	-	-	8	88	0,165
CRAS25-115	700	25 TON	115	240	355	1	10	49,50	55	65	21.50	66	M12	50	M38x2	M86x2	8	88	0,350
CRAS25-165	700	25 TON	165	290	455	1	10	49,50	55	65	21.50	66	M12	50	M38x2	M86x2	8	88	0,500
CRAS25-215	700	25 TON	215	340	555	1	10	49,50	55	65	21.50	66	M12	50	M38x2	M86x2	8	88	0,650
CRAS25-265	700	25 TON	265	390	655	1	10	49,50	55	65	21.50	66	M12	50	M38x2	M38x2	8	88	0,800
CRAS25-315	700	25 TON	315	-	-	1	-	-	-	-	-	-	-	-	-	-	-	-	-
CRAS25-365	700	25 TON	365	-	-	1	-	-	-	-	-	-	-	-	-	-	-	-	-
CRAS50-55	700	50 TON	55	191	246	1	3.50	71.50	80	95	33,50	95	M12	62	-	M128x2,5	8	128	0,350
CRAS50-115	700	50 TON	115	251	366	1	3.50	71.50	80	95	33,50	95	M12	62	-	M128x2,5	8	128	0,750
CRAS50-165	700	50 TON	165	301	466	1	3.50	71.50	80	95	33,50	95	M12	62	-	M128x2,5	8	128	1
CRAS50-215	700	50 TON	215	351	566	1	3.50	71.50	80	95	33,50	95	M12	62	-	M128x2,5	8	128	1,350
CRAS50-265	700	50 TON	265	401	666	1	3.50	71.50	80	95	33,50	95	M12	62	-	M128x2,5	8	128	1,700
CRAS50-315	700	50 TON	315	451	766	1	3.50	71.50	80	95	33,50	95	M12	62	-	M128x2,5	8	128	2
CRAS50-365	700	50 TON	365	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRAS75-55	700	75 TON	55	195	250	1	3.50	71.50	90	116	33,50	115	M12	63	-	M148x2,5	8	148	0,500
CRAS75-115	700	75 TON	115	255	370	1	3.50	71.50	90	116	33,50	115	M12	63	-	M148x2,5	8	148	1,100
CRAS75-165	700	75 TON	165	305	470	1	3.50	71.50	90	116	33,50	115	M12	63	-	M148x2,5	8	148	1,600
CRAS75-215	700	75 TON	215	355	570	1	3.50	71.50	90	116	33,50	115	M12	63	-	M148x2,5	8	148	2,100
CRAS75-265	700	75 TON	265	405	670	1	3.50	71.50	90	116	33,50	115	M12	63	-	M148x2,5	8	148	2,600
CRAS75-315	700	75 TON	315	455	770	1	3.50	71.50	90	116	33,50	115	M12	63	-	M148x2,5	8	148	3
CRAS75-365	700	75 TON	365	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRAS100-55	700	100 TON	55	202	257	3	3.50	71.50	100	135	33,50	145	M12	63	-	M178x3	8	178	0,720
CRAS100-115	700	100 TON	115	262	377	3	3.50	71.50	100	135	33,50	145	M12	63	-	M178x3	8	178	1,5
CRAS100-165	700	100 TON	165	312	477	3	3.50	71.50	100	135	33,50	145	M12	63	-	M178x3	8	178	2,200
CRAS100-215	700	100 TON	215	362	577	3	3.50	71.50	100	135	33,50	145	M12	63	-	M178x3	8	178	2,800
CRAS100-265	700	100 TON	265	412	677	3	3.50	71.50	100	135	33,50	145	M12	63	-	M178x3	8	178	3,5
CRAS100-315	700	100 TON	315	462	777	3	3.50	71.50	100	135	33,50	145	M12	63	-	M178x3	8	178	4
CRAS100-365	700	100 TON	365	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRAS150-55	700	150 TON	55	205	260	2,50	3.50	71.50	120	165	33,50	174	M14	65	-	M208x3	12	208	1,100
CRAS150-115	700	150 TON	115	265	380	2,50	3.50	71.50	120	165	33,50	174	M14	65	-	M208x3	12	208	2,200
CRAS150-165	700	150 TON	165	295	460	2,50	3.50	71.50	120	165	33,50	174	M14	65	-	M208x3	12	208	3,200
CRAS150-215	700	150 TON	215	365	570	2,50	3.50	71.50	120	165	33,50	174	M14	65	-	M208x3	12	208	4,200
CRAS150-265	700	150 TON	265	395	660	2,50	3.50	71.50	120	165	33,50	174	M14	65	-	M208x3	12	208	5,100
CRAS150-315	700	150 TON	315	465	780	2,50	3.50	71.50	120	165	33,50	174	M14	65	-	M208x3	12	208	6,100
CRAS150-365	700	150 TON	365	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-