

BV2HD SERİSİ HİDROLİK 2 YOLLU KÜRESEL VANALAR (KIRICILAR İÇİN)



BV2HD Serisi Hidrolik 2 Yollu Küresel Vanalar, yüksek debili akışkanların ve hidrolik şokların verebileceği zararlara karşı mükemmel dayanıklılıkları sayesinde kırıcılarda ve ağır iş makinelerinde vibrasyonlu yüksek basınç uygulamalarında kullanılmaktadır.


Gövde Malzemesi	Yüksek Nitelikli Dövme Çelik
Küre Malzemesi	Sert Krom Kaplı Çelik
Vida Ölçüsü	BSP (İsteğe Bağlı: NPT, Metrik)
Küre Yataklaması	Delrin (POM)
Sızdırmazlık	Nitril O-ring (NBR)
Çalışma Sıcaklığı	-30 °C ile +110 °C
Kaplama	Galvaniz (Chrome III pasivasyon)
Özel Hallerde	VİTON (-30 °C - +225 °C)
Kullanım Alanı	Kırıcılar, Kazı makineleri, vinçler,

BV2HD SERIES HYDRAULIC 2-WAY BALL VALVES (FOR HAMMERS & BREAKERS)




BV2HD Series Hydraulic 2 Way Ball Valves' great resistance to pressure peaks prevent damage from high velocity fluid and hydraulic shocks, allow applications involving high pressure impulses for hammers & breakers.

Body Material	High grade forged steel
Ball Material	Hard chrome coated carbon steel.
Thread Size	BSP (Upon Request: NPT, Metric)
Ball Seats	Delrin (POM)
Sealing	Nitrile O-ring (NBR)
Working Temperature	-30 °C and +110 °C
Plating	Zinc Plating (Cr III Passivation)
Upon Request	VITON (-30 °C - +225 °C)
Applications	Brakers & Hammers, Drilling Machines, Cranes, Excavators




Tek Flanşlı / Single Flange

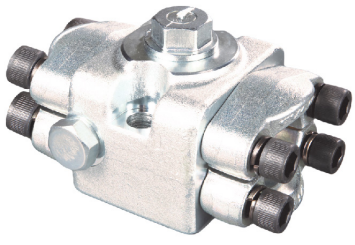

Çift Flanşlı / Double Flange





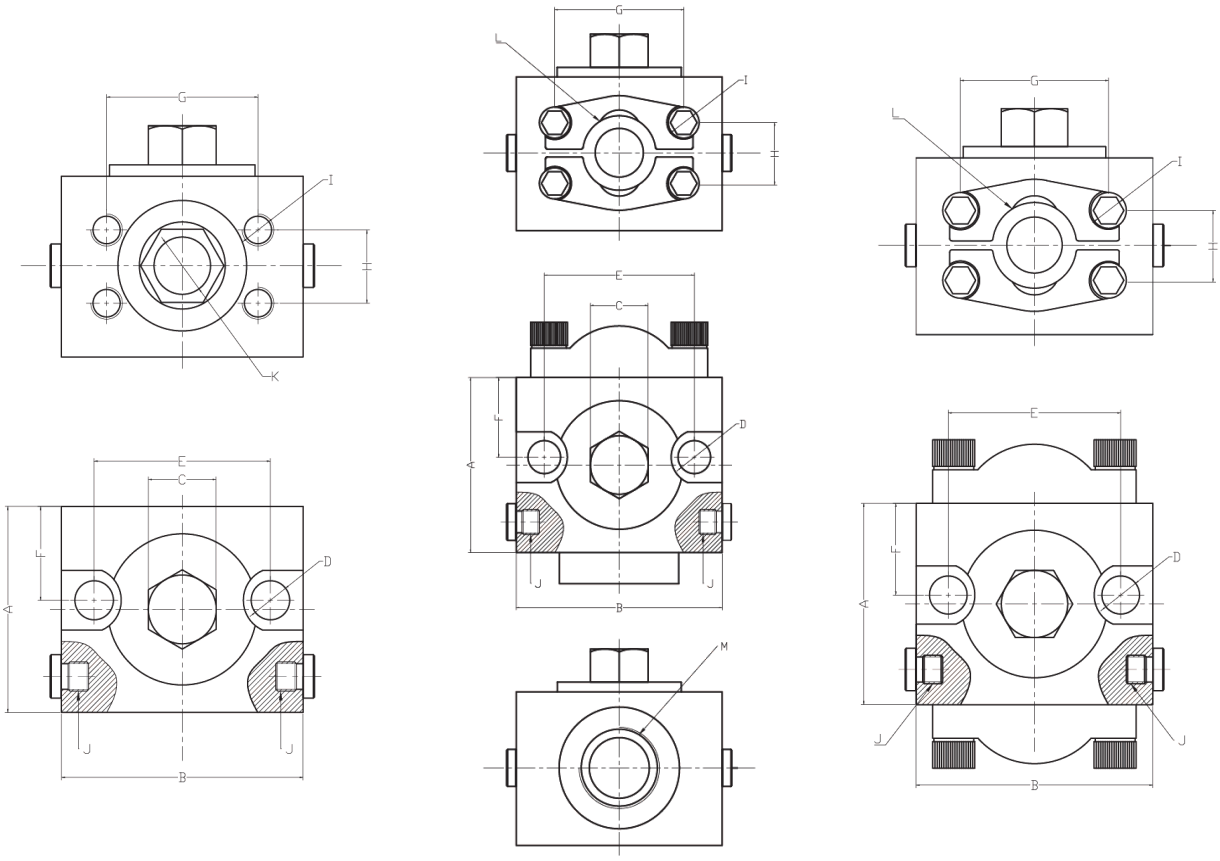

Teknik Özellikler Technical Specifications

Kod (Code)	Vida Ölçüsü (Thread Size) M	Çalışma Basıncı (Working Pressure-Bar)	Ölçüler - mm (Dimensions) - mm											
			A	B	C	D	E	F	G	H	I	J	K	L
BV2HDG1N	1" BSP	440	78	83	AA30	13	64	39.50	52.50	26.20	M10x1.5	1/4" BSP	DN25	-
BV2HDG114N	1 1/4" BSP	420	93	106	AA30	17	78	47.75	66.80	32	M14x2	1/4" BSP	DN32	-
BV2HDSFG1N	1" BSP	440	78	83	AA30	13	64	39.50	52.50	26.20	M10x1.5	1/4" BSP	DN25	38.30
BV2HDSFG114N	1 1/4" BSP	420	93	106	AA30	17	78	47.75	66.80	32	M14x2	1/4" BSP	DN32	43.70
BV2HDDFG1N	1" BSP	440	78	83	AA30	13	64	39.50	52.50	26.20	M10x1.5	1/4" BSP	DN25	38.30
BV2HDDFG114N	1 1/4" BSP	420	93	106	AA30	17	78	47.75	66.80	32	M14x2	1/4" BSP	DN32	43.70



FER-RO / BV2HD SERİSİ HİDROLİK 2 YOLLU KÜRESEL VANALAR - KIRICILAR İÇİN

FER-RO / BV2HD SERIES HYDRAULIC 2-WAY BALL VALVES FOR HAMMERS AND BRAKERS